

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205044

Luminaire Tested: **LD6B60D010TE EU6B60709024 6LBCSMMS1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205044
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60709024 6LBCSMMS1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE METALLIC SILVER TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4438.4 lumens
Efficiency: N/A
Efficacy: 71.0 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.27
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205044

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBSCMMS1

Luminous Intensity Polar Plot

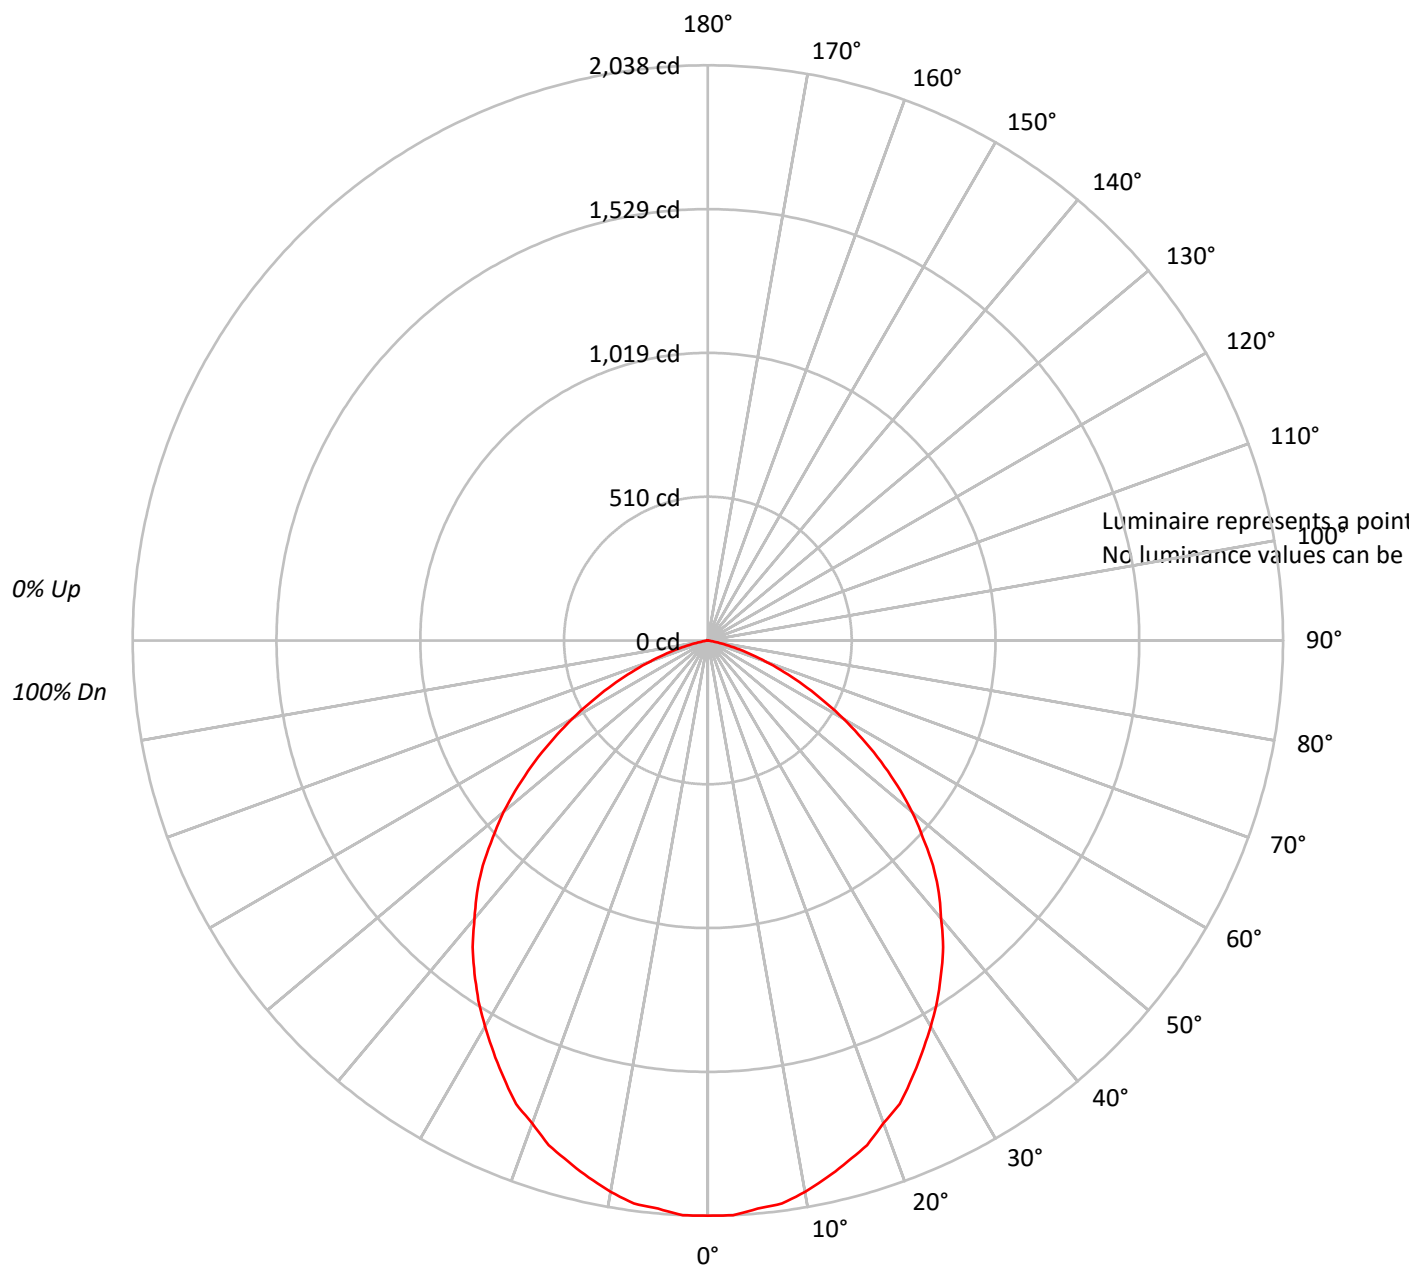



TEST NUMBER: P205044

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBCSMMS1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	103	100		108	105	101	98		100	98	95		97	94	92		93	91	90
2	102	95	89	84		99	93	88	83		90	85	81		86	83	79		83	80	78
3	94	85	77	72		92	83	76	71		80	74	70		77	73	69		75	71	67
4	87	76	68	62		84	74	67	61		72	66	61		70	64	60		68	63	59
5	80	68	60	54		78	67	59	54		65	58	53		63	57	53		61	56	52
6	74	62	54	48		72	61	53	47		59	52	47		58	51	47		56	51	46
7	69	56	48	42		67	56	48	42		54	47	42		53	46	42		51	46	41
8	64	52	44	38		63	51	43	38		50	43	38		48	42	38		47	42	37
9	60	48	40	35		59	47	40	34		46	39	34		45	39	34		44	38	34
10	57	44	36	31		55	43	36	31		43	36	31		42	35	31		41	35	31

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205044

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBCSMMS1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	192.1	4.3
10°-20°	539.0	12.1
20°-30°	787.2	17.7
30°-40°	900.4	20.3
40°-50°	865.4	19.5
50°-60°	668.2	15.1
60°-70°	373.0	8.4
70°-80°	108.5	2.4
80°-90°	4.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1518.3	34.2
0°-40°	2418.7	54.5
0°-60°	3952.3	89.0
0°-90°	4438.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4438.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2038	
5°	2021	192
15°	1912	539
25°	1711	787
35°	1441	900
45°	1128	865
55°	749	668
65°	373	373
75°	95	109
85°	3	5
90°	0	



TEST NUMBER: P205044

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBCSMMS1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2038.2
2.5°	2038.2
5°	2021.0
7.5°	2012.4
10°	1983.7
12.5°	1949.2
15°	1911.9
17.5°	1874.6
20°	1820.1
22.5°	1777.0
25°	1711.0
27.5°	1644.9
30°	1578.9
32.5°	1512.9
35°	1441.1
37.5°	1369.3
40°	1286.1
42.5°	1211.5
45°	1128.2
47.5°	1033.5
50°	944.5
52.5°	846.9
55°	749.3
57.5°	648.8
60°	554.1
62.5°	459.3
65°	373.2
67.5°	292.8
70°	218.2
72.5°	152.1
75°	94.7
77.5°	48.8
80°	17.2
82.5°	5.7
85°	2.9
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)