

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204736

Luminaire Tested: **LD6B60D010TE EU6B60709024 6LBPSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204736
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60709024 6LBPSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4686.9 lumens
Efficiency: N/A
Efficacy: 75.0 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204736

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBPSMW1

Luminous Intensity Polar Plot

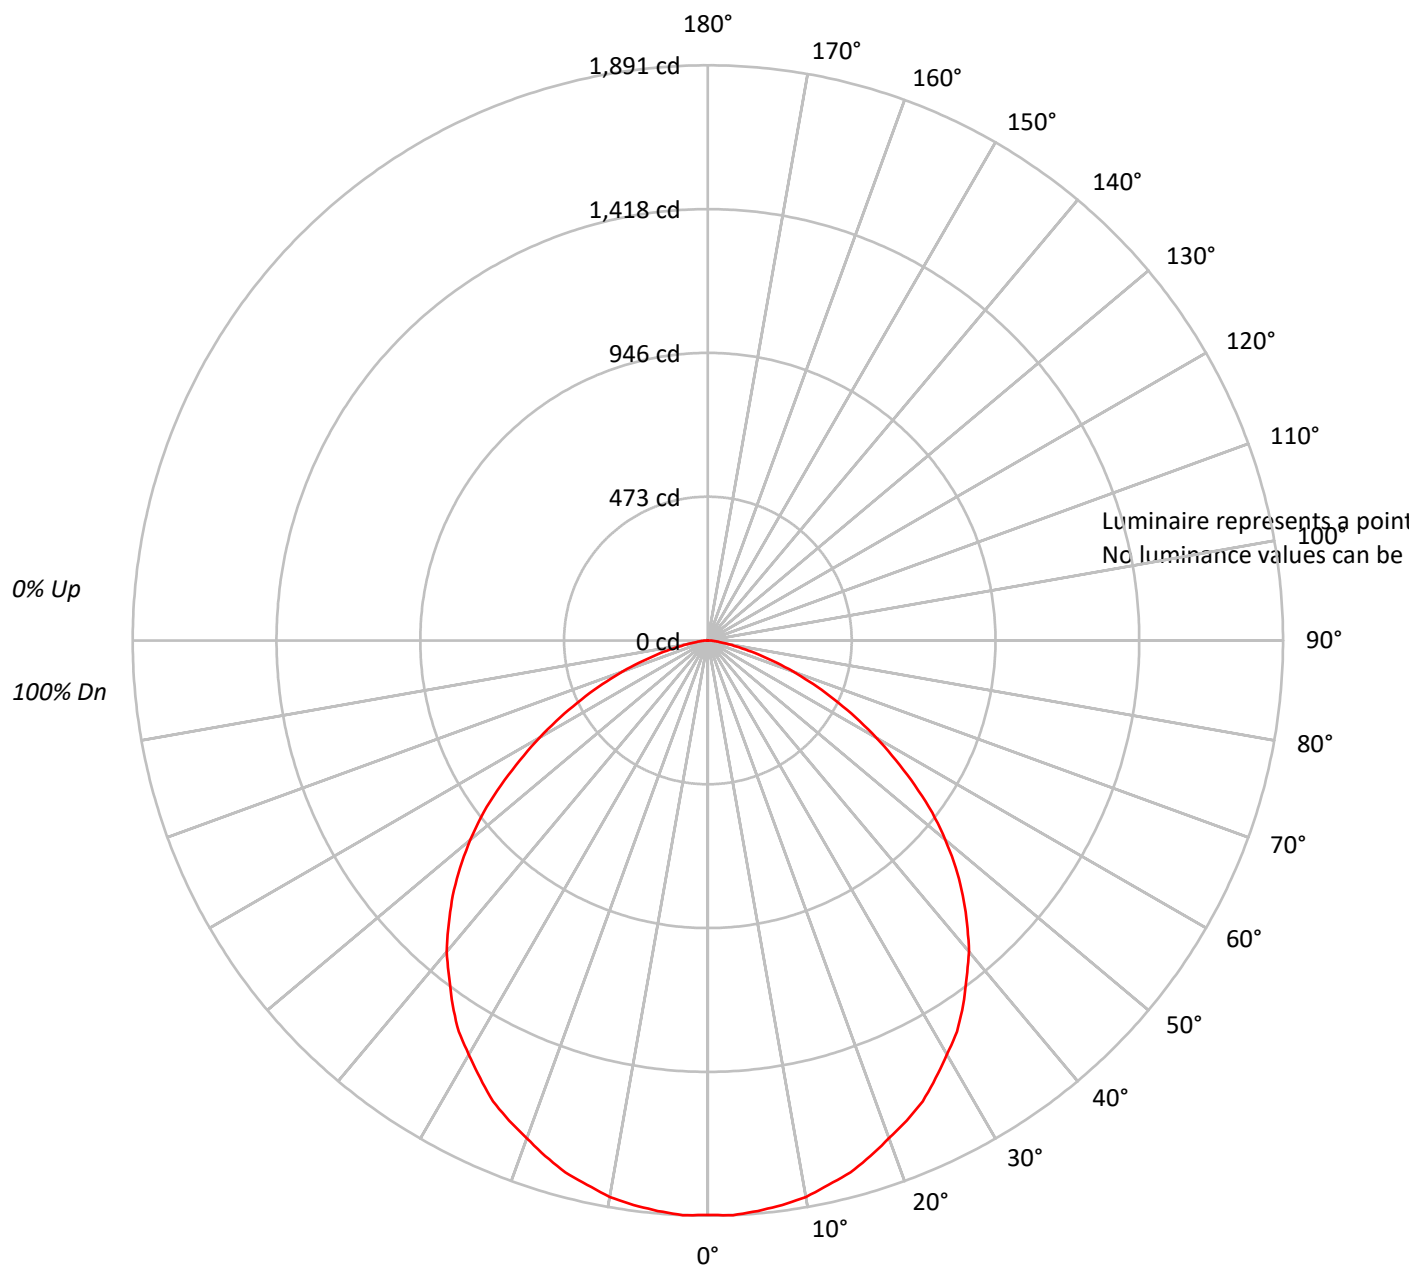



TEST NUMBER: P204736

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBPSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	110	106	102	99		107	104	100	97		99	97	94		96	93	91		92	90	88
2	101	93	87	82		98	92	86	81		88	83	79		85	81	77		82	79	76
3	93	83	75	69		90	81	74	69		78	72	67		76	70	66		73	69	65
4	85	74	66	59		83	72	65	59		70	63	58		68	62	57		66	61	56
5	78	66	58	51		76	65	57	51		63	56	51		61	55	50		59	54	49
6	73	60	51	45		71	59	51	45		57	50	44		55	49	44		54	48	44
7	67	54	46	40		66	54	46	40		52	45	40		51	44	39		49	43	39
8	63	50	41	36		61	49	41	36		48	41	35		46	40	35		45	39	35
9	59	46	38	32		57	45	37	32		44	37	32		43	36	32		42	36	32
10	55	42	34	29		54	42	34	29		41	34	29		40	33	29		39	33	29

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204736

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBPSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	178.9	3.8
10°-20°	510.0	10.9
20°-30°	768.1	16.4
30°-40°	914.0	19.5
40°-50°	912.3	19.5
50°-60°	741.9	15.8
60°-70°	456.4	9.7
70°-80°	176.8	3.8
80°-90°	28.3	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1457.1	31.1
0°-40°	2371.1	50.6
0°-60°	4025.4	85.9
0°-90°	4686.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4686.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1888	
5°	1883	179
15°	1811	510
25°	1672	768
35°	1464	914
45°	1186	912
55°	830	742
65°	458	456
75°	161	177
85°	22	28
90°	0	



TEST NUMBER: P204736

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBPSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1888.4
2.5°	1891.2
5°	1882.8
7.5°	1871.7
10°	1857.8
12.5°	1832.9
15°	1810.6
17.5°	1777.3
20°	1741.2
22.5°	1707.9
25°	1671.8
27.5°	1621.8
30°	1571.8
32.5°	1524.6
35°	1463.5
37.5°	1396.9
40°	1335.8
42.5°	1260.8
45°	1185.8
47.5°	1105.3
50°	1019.2
52.5°	930.3
55°	830.3
57.5°	733.1
60°	638.7
62.5°	547.1
65°	458.2
67.5°	374.9
70°	297.1
72.5°	224.9
75°	161.1
77.5°	105.5
80°	63.9
82.5°	38.9
85°	22.2
87.5°	11.1
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)