

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203189

Luminaire Tested: **LD6B60D010TE EU6B60709024 6LBWMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203189
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60709024 6LBWMW1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4078.9 lumens
Efficiency: N/A
Efficacy: 65.3 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203189

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBWMW1

Luminous Intensity Polar Plot

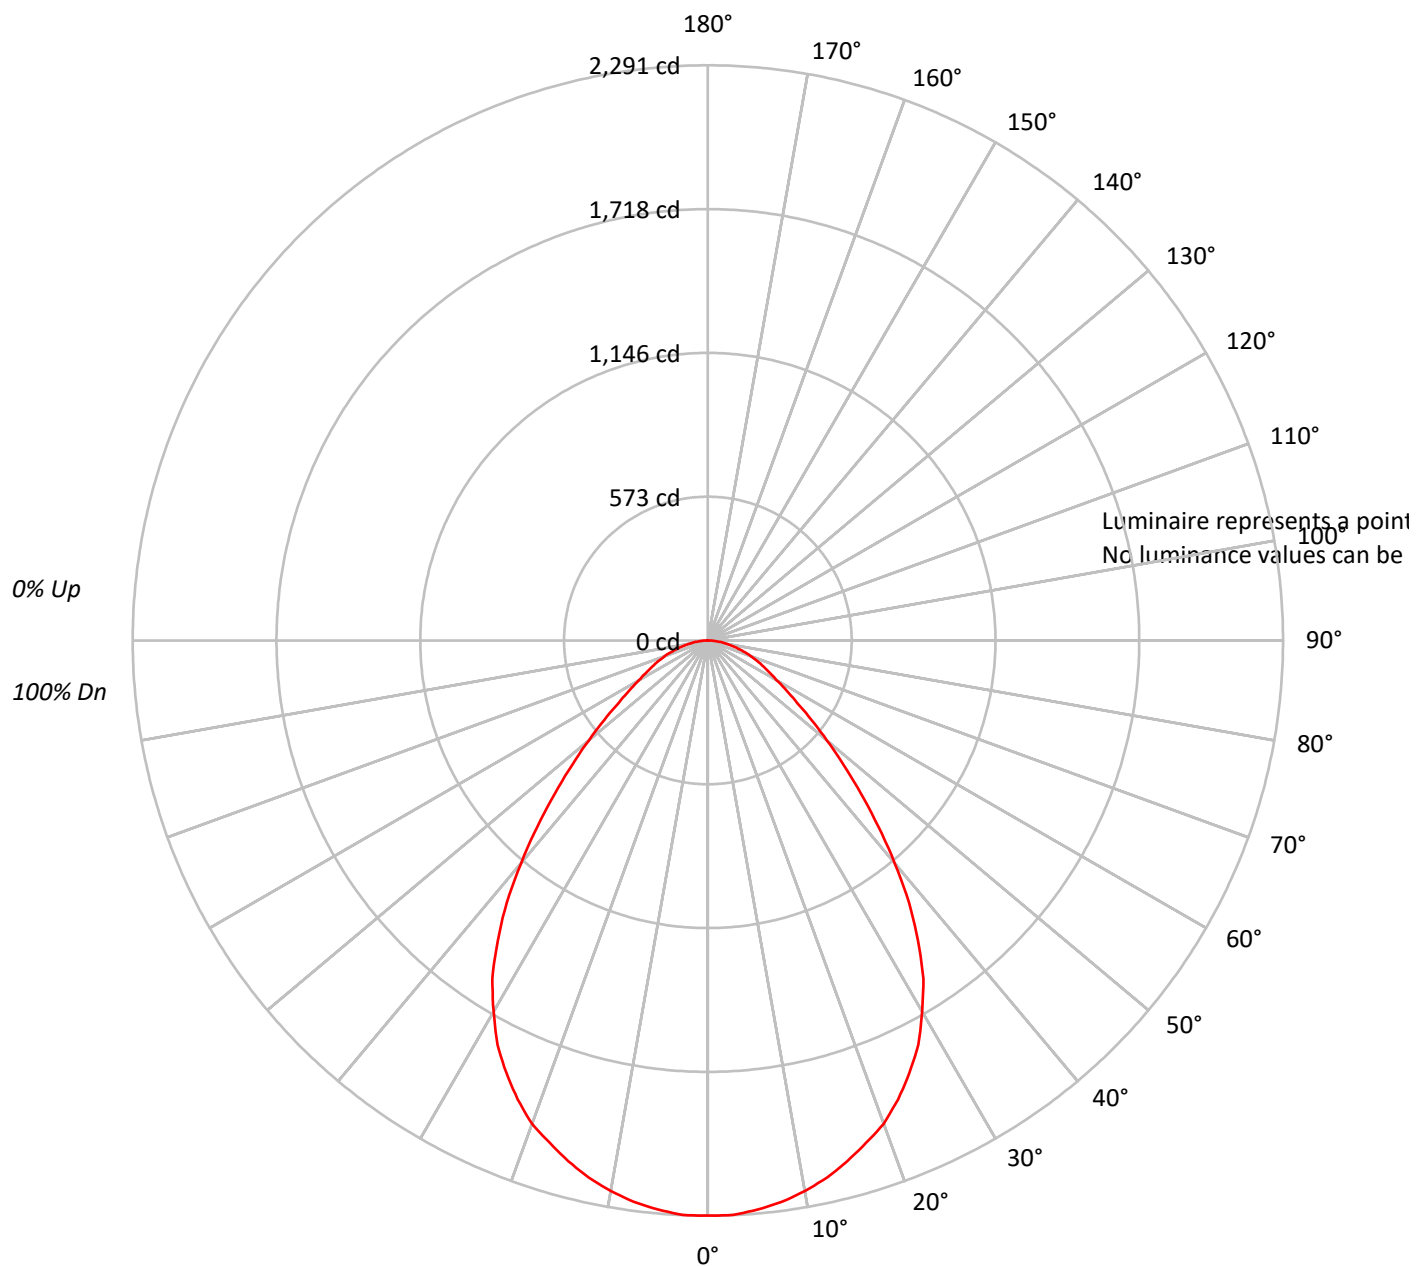




TEST NUMBER: P203189

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBWMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	104	100		108	105	102	99		101	98	96		97	95	93		93	92	90
2	103	96	90	86		100	94	89	85		91	86	83		88	84	81		85	82	79
3	95	86	80	74		93	85	79	74		82	77	72		80	75	71		77	73	70
4	89	78	71	65		86	77	70	65		75	69	64		72	67	63		70	66	62
5	82	71	64	58		80	70	63	58		68	62	57		66	61	56		65	60	56
6	77	65	57	52		75	64	57	52		63	56	51		61	55	51		60	54	50
7	72	60	52	47		70	59	52	47		58	51	46		56	50	46		55	50	46
8	67	55	48	42		66	55	47	42		53	47	42		52	46	42		51	46	42
9	63	51	44	39		62	51	44	39		50	43	39		49	43	38		48	42	38
10	60	48	40	36		58	47	40	36		46	40	36		45	40	35		45	39	35

AVERAGE LUMINANCE (cd/sqm):

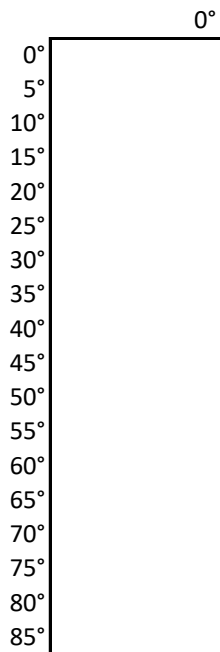



TEST NUMBER: P203189

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBWMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	215.7	5.3
10°-20°	605.0	14.8
20°-30°	871.6	21.4
30°-40°	905.0	22.2
40°-50°	669.1	16.4
50°-60°	399.7	9.8
60°-70°	242.8	6.0
70°-80°	133.0	3.3
80°-90°	37.0	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1692.3	41.5
0°-40°	2597.3	63.7
0°-60°	3666.0	89.9
0°-90°	4078.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4078.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2291	
5°	2276	216
15°	2147	605
25°	1900	872
35°	1459	905
45°	861	669
55°	435	400
65°	242	243
75°	124	133
85°	30	37
90°	0	



TEST NUMBER: P203189

CATALOG NUMBER: LD6B60D010TE EU6B60709024 6LBWMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2290.6
2.5°	2290.6
5°	2275.7
7.5°	2255.9
10°	2226.3
12.5°	2191.6
15°	2147.1
17.5°	2097.6
20°	2048.2
22.5°	1978.9
25°	1899.7
27.5°	1815.6
30°	1706.8
32.5°	1598.0
35°	1459.4
37.5°	1316.0
40°	1157.7
42.5°	1004.3
45°	860.8
47.5°	732.2
50°	618.4
52.5°	519.5
55°	435.4
57.5°	371.0
60°	316.6
62.5°	277.0
65°	242.4
67.5°	212.7
70°	183.0
72.5°	153.4
75°	123.7
77.5°	98.9
80°	74.2
82.5°	54.4
85°	29.7
87.5°	14.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)