

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204937

Luminaire Tested: **LD6B60D010TE EU6B60708027 6LBCSMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204937
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60708027 6LBCSMB1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE BLACK TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5301.6 lumens
Efficiency: N/A
Efficacy: 84.9 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204937

CATALOG NUMBER: LD6B60D010TE EU6B60708027 6LBCSMB1

Luminous Intensity Polar Plot

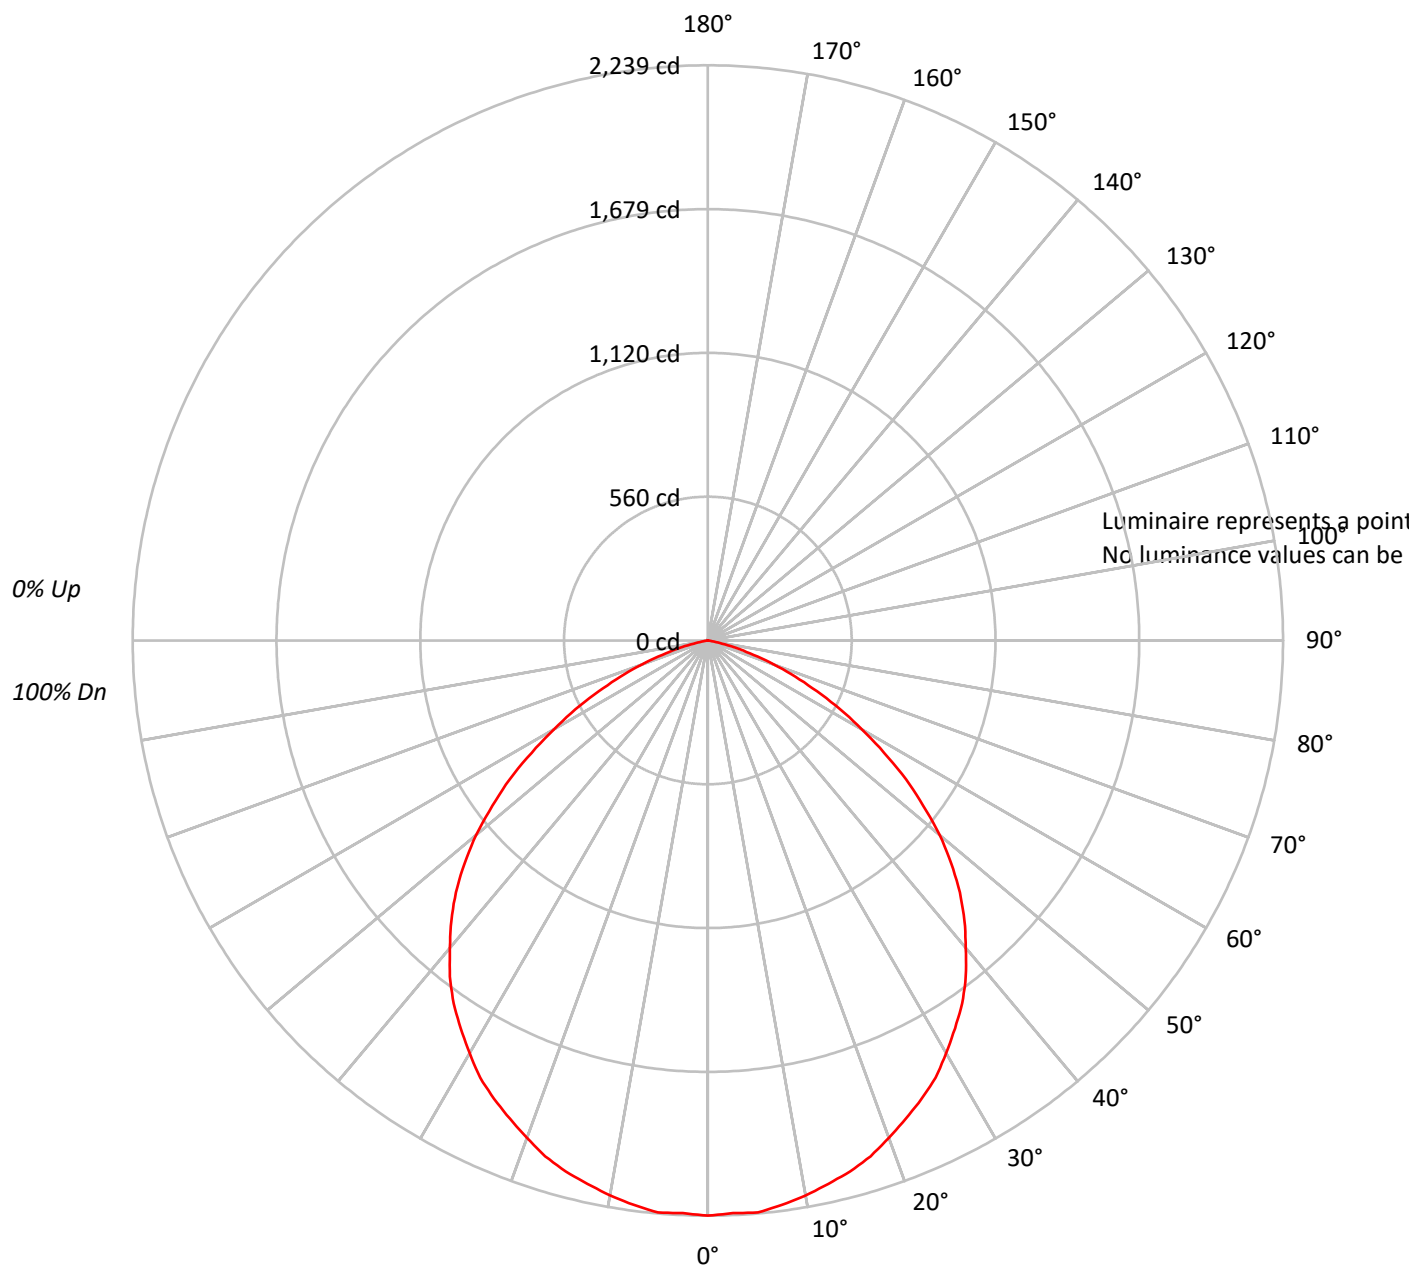




TEST NUMBER: P204937

CATALOG NUMBER: LD6B60D010TE EU6B60708027 6LBCSMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	103	100		108	104	101	98		100	98	95		96	94	92		93	91	90
2	102	95	89	84		99	93	87	83		89	85	81		86	82	79		83	80	77
3	93	84	77	71		91	83	76	70		80	74	69		77	72	68		74	70	67
4	86	75	67	61		84	74	66	61		71	65	60		69	63	59		67	62	58
5	79	67	59	53		77	66	59	53		64	57	52		62	56	52		61	55	51
6	74	61	53	47		72	60	52	46		58	51	46		57	50	46		55	50	45
7	68	55	47	41		67	55	47	41		53	46	41		52	45	41		50	45	40
8	64	51	43	37		62	50	42	37		49	42	37		48	41	37		46	41	36
9	60	47	39	33		58	46	39	33		45	38	33		44	38	33		43	37	33
10	56	43	35	30		55	43	35	30		42	35	30		41	34	30		40	34	30

AVERAGE LUMINANCE (cd/sqm):

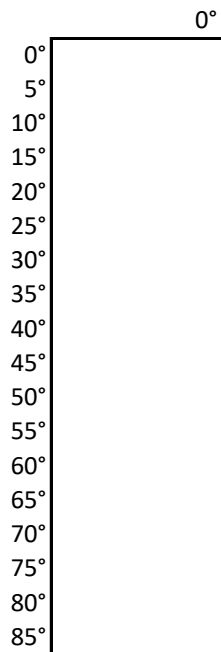



TEST NUMBER: P204937

CATALOG NUMBER: LD6B60D010TE EU6B60708027 6LBCSMB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	211.7	4.0
10°-20°	603.2	11.4
20°-30°	906.8	17.1
30°-40°	1076.0	20.3
40°-50°	1064.8	20.1
50°-60°	836.4	15.8
60°-70°	468.9	8.8
70°-80°	131.7	2.5
80°-90°	2.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1721.8	32.5
0°-40°	2797.8	52.8
0°-60°	4699.0	88.6
0°-90°	5301.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5301.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2239	
5°	2235	212
15°	2140	603
25°	1969	907
35°	1726	1076
45°	1387	1065
55°	943	836
65°	468	469
75°	114	132
85°	0	2
90°	0	



TEST NUMBER: P204937

CATALOG NUMBER: LD6B60D010TE EU6B60708027 6LBCSMB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2238.7
2.5°	2231.1
5°	2234.9
7.5°	2215.9
10°	2193.1
12.5°	2166.4
15°	2139.8
17.5°	2105.6
20°	2060.0
22.5°	2014.4
25°	1968.8
27.5°	1919.4
30°	1854.8
32.5°	1790.2
35°	1725.6
37.5°	1649.5
40°	1562.1
42.5°	1478.5
45°	1387.3
47.5°	1284.7
50°	1178.2
52.5°	1056.6
55°	942.6
57.5°	813.4
60°	691.7
62.5°	581.5
65°	467.5
67.5°	368.7
70°	273.7
72.5°	186.2
75°	114.0
77.5°	57.0
80°	15.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)