

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205548

Luminaire Tested: **LD6B60D010TE EU6B60708027 6LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205548
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60708027 6LBMGPH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3187.4 lumens
Efficiency: N/A
Efficacy: 51.0 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205548

CATALOG NUMBER: LD6B60D010TE EU6B60708027 6LBMGPH1

Luminous Intensity Polar Plot

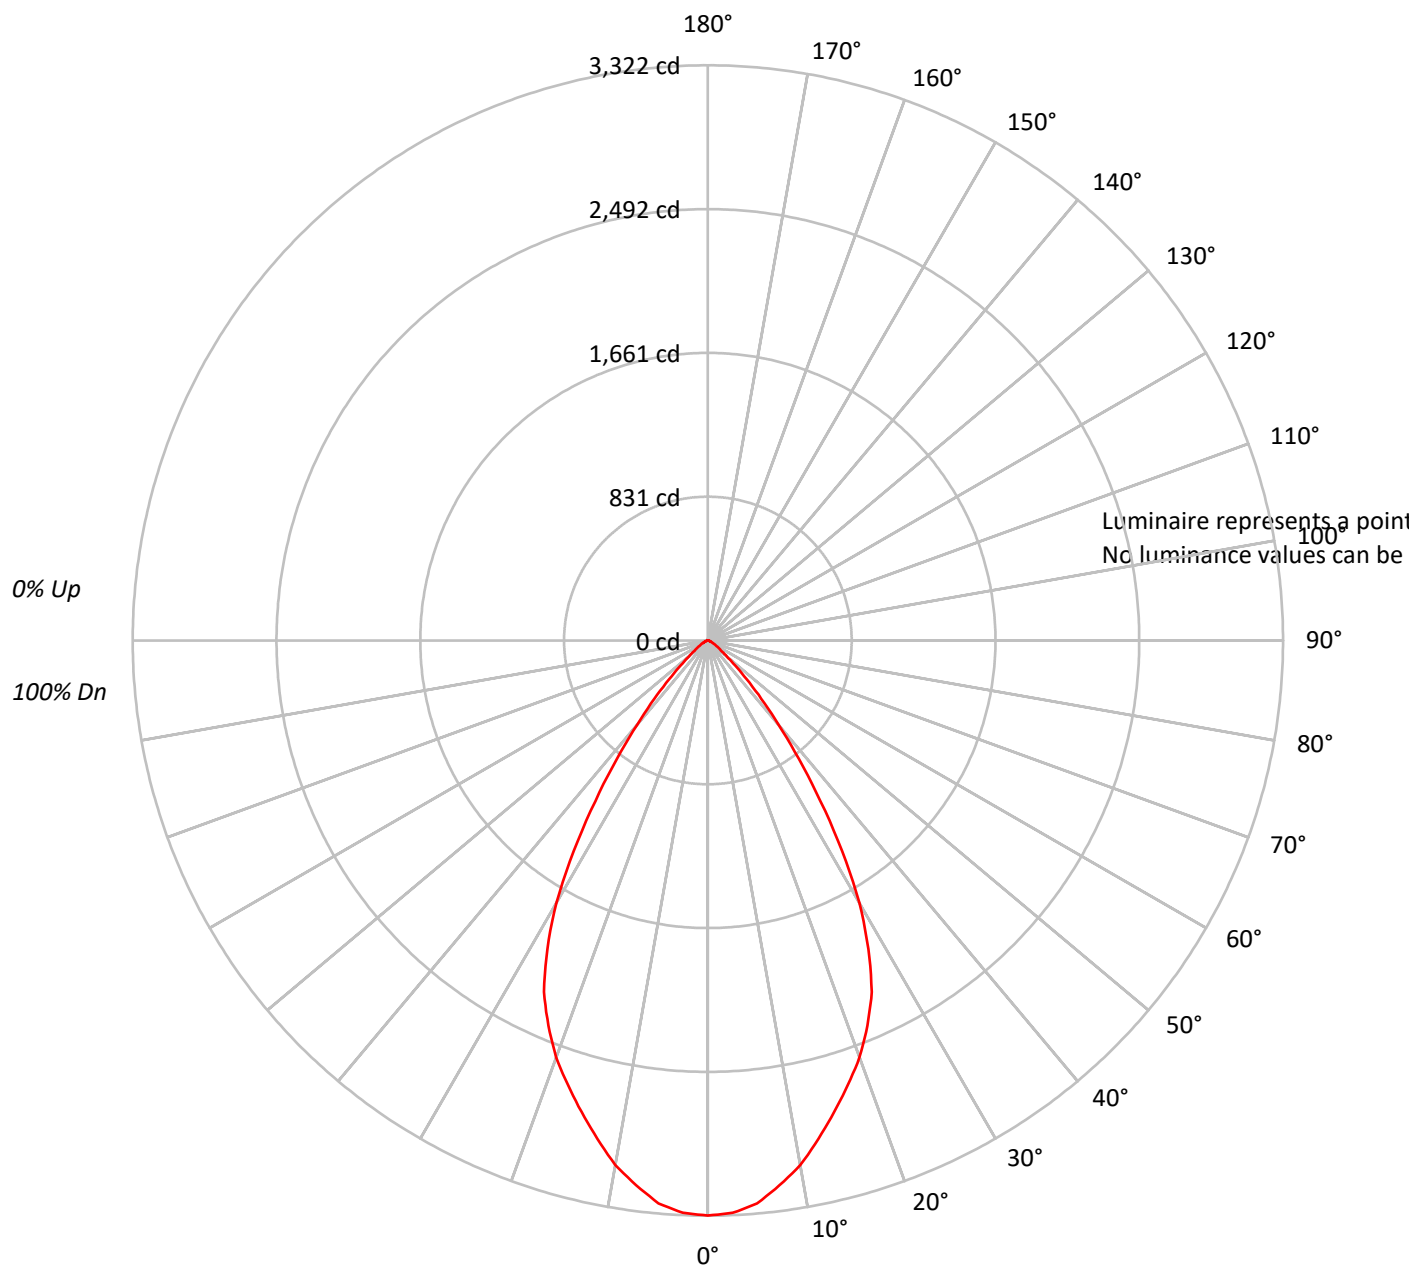



TEST NUMBER: P205548

CATALOG NUMBER: LD6B60D010TE EU6B60708027 6LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	101		100	99	98		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	85	100	93	89	85	91	87	83		88	85	82		86
4	96	88	82	78	94	87	82	77	85	80	77		83	79	76		81
5	91	82	76	72	89	81	76	71	79	74	71		78	73	70		76
6	86	77	71	66	85	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	65	61		69	64	60		68
8	77	68	61	57	76	67	61	57	66	60	57		65	60	56		64
9	74	64	57	53	72	63	57	53	62	57	53		61	56	53		60
10	70	60	54	50	69	59	54	50	59	53	50		58	53	49		57

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205548

CATALOG NUMBER: LD6B60D010TE EU6B60708027 6LBMGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	305.1	9.6
10°-20°	791.8	24.8
20°-30°	1008.8	31.6
30°-40°	713.0	22.4
40°-50°	260.3	8.2
50°-60°	72.1	2.3
60°-70°	26.2	0.8
70°-80°	9.3	0.3
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2105.7	66.1
0°-40°	2818.7	88.4
0°-60°	3151.1	98.9
0°-90°	3187.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3187.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3322	
5°	3264	305
15°	2819	792
25°	2240	1009
35°	1133	713
45°	315	260
55°	77	72
65°	26	26
75°	6	9
85°	0	1
90°	0	



TEST NUMBER: P205548

CATALOG NUMBER: LD6B60D010TE EU6B60708027 6LBMGPH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	3321.5
2.5°	3308.6
5°	3263.5
7.5°	3173.4
10°	3076.9
12.5°	2948.1
15°	2819.4
17.5°	2690.6
20°	2561.9
22.5°	2407.4
25°	2240.1
27.5°	2008.3
30°	1750.9
32.5°	1441.9
35°	1132.9
37.5°	862.6
40°	630.8
42.5°	457.0
45°	315.4
47.5°	212.4
50°	141.6
52.5°	96.6
55°	77.2
57.5°	57.9
60°	45.1
62.5°	32.2
65°	25.7
67.5°	19.3
70°	12.9
72.5°	12.9
75°	6.4
77.5°	6.4
80°	6.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)