

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205549

Luminaire Tested: **LD6B60D010TE EU6B60708030 6LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205549
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60708030 6LBMGPH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3332.1 lumens
Efficiency: N/A
Efficacy: 53.3 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205549

CATALOG NUMBER: LD6B60D010TE EU6B60708030 6LBMGPH1

Luminous Intensity Polar Plot

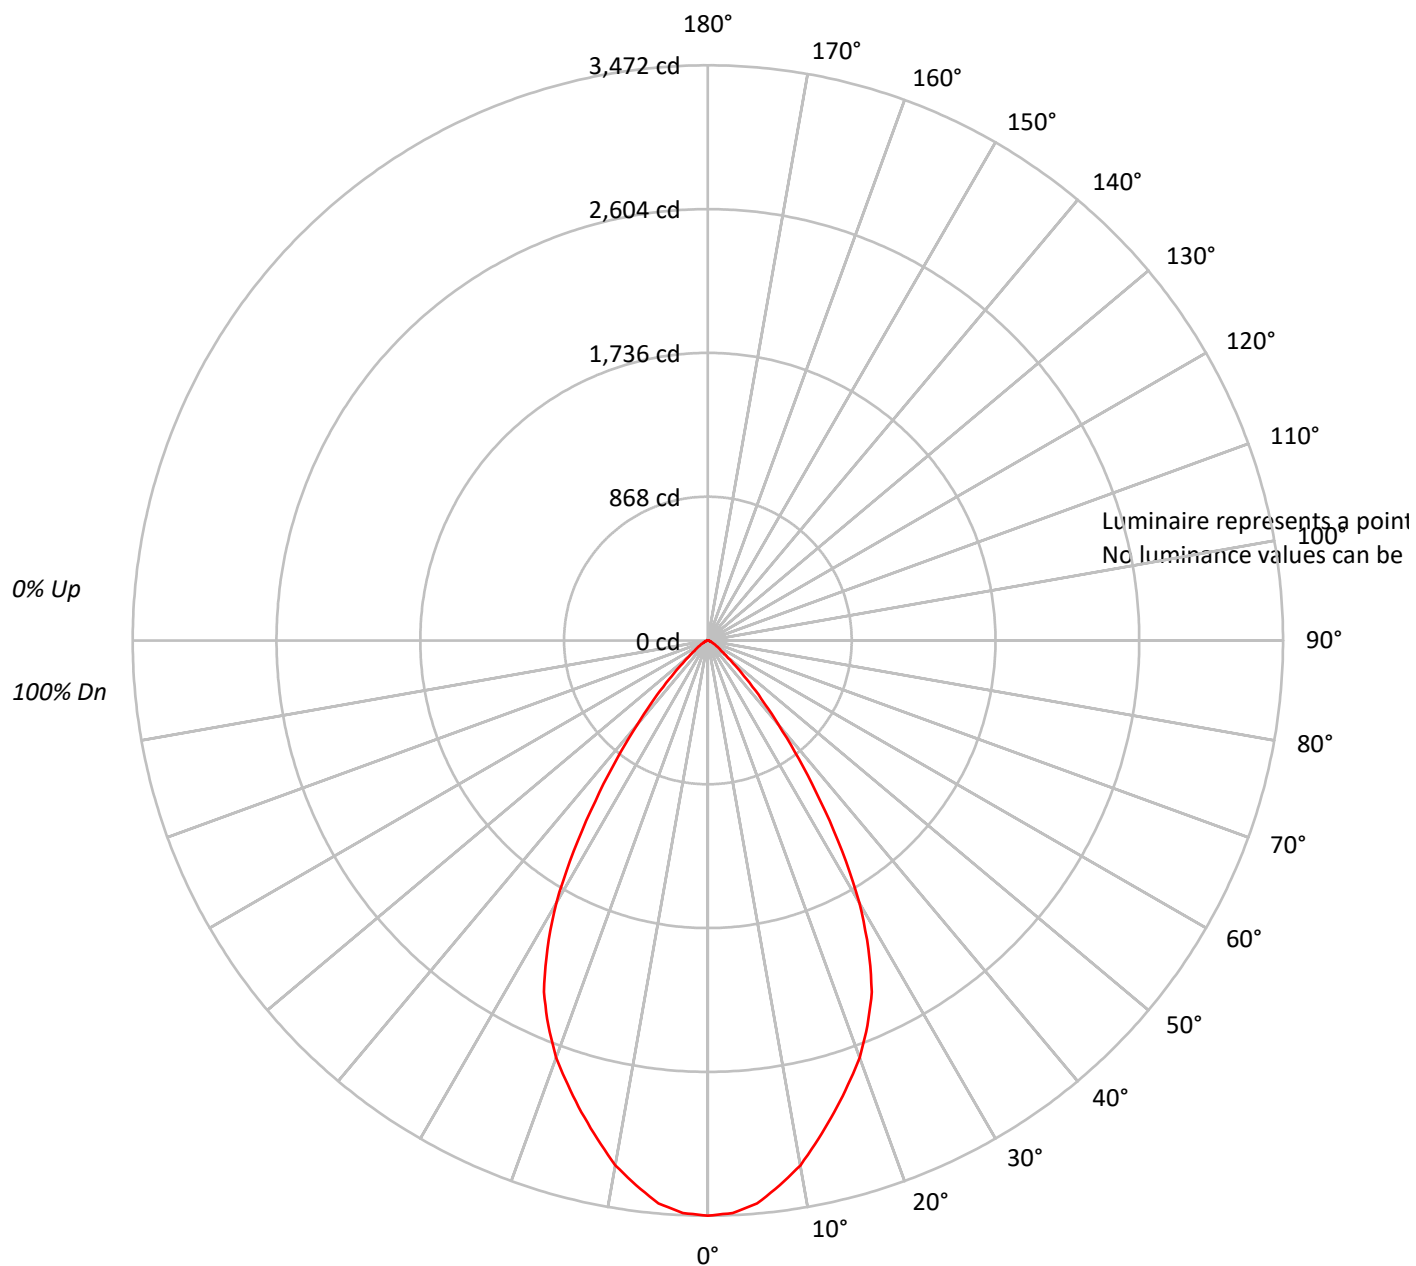



TEST NUMBER: P205549

CATALOG NUMBER: LD6B60D010TE EU6B60708030 6LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	101		100	99	98		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	85	100	93	89	85	91	87	83		88	85	82		86
4	96	88	82	78	94	87	82	77	85	80	77		83	79	76		81
5	91	82	76	72	89	81	76	71	79	74	71		78	73	70		76
6	86	77	71	66	85	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	65	61		69	64	60		68
8	77	68	61	57	76	67	61	57	66	60	57		65	60	56		64
9	74	64	57	53	72	63	57	53	62	57	53		61	56	53		60
10	70	60	54	50	69	59	54	50	59	53	50		58	53	49		57

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205549

CATALOG NUMBER: LD6B60D010TE EU6B60708030 6LBMGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	319.0	9.6
10°-20°	827.7	24.8
20°-30°	1054.6	31.6
30°-40°	745.3	22.4
40°-50°	272.1	8.2
50°-60°	75.4	2.3
60°-70°	27.3	0.8
70°-80°	9.7	0.3
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2201.3	66.1
0°-40°	2946.6	88.4
0°-60°	3294.1	98.9
0°-90°	3332.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3332.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3472	
5°	3412	319
15°	2947	828
25°	2342	1055
35°	1184	745
45°	330	272
55°	81	75
65°	27	27
75°	7	10
85°	0	1
90°	0	



TEST NUMBER: P205549

CATALOG NUMBER: LD6B60D010TE EU6B60708030 6LBMGPH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	3472.2
2.5°	3458.8
5°	3411.7
7.5°	3317.4
10°	3216.5
12.5°	3081.9
15°	2947.3
17.5°	2812.8
20°	2678.2
22.5°	2516.7
25°	2341.7
27.5°	2099.5
30°	1830.3
32.5°	1507.3
35°	1184.3
37.5°	901.7
40°	659.5
42.5°	477.8
45°	329.7
47.5°	222.1
50°	148.0
52.5°	100.9
55°	80.7
57.5°	60.6
60°	47.1
62.5°	33.6
65°	26.9
67.5°	20.2
70°	13.5
72.5°	13.5
75°	6.7
77.5°	6.7
80°	6.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)