

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202676

Luminaire Tested: **LD6B60D010TE EU6B60709030 6LBMWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202676
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60709030 6LBMWMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH WARM HAZE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4001.2 lumens
Efficiency: N/A
Efficacy: 64.0 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.89
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202676

CATALOG NUMBER: LD6B60D010TE EU6B60709030 6LBMWMH1

Luminous Intensity Polar Plot

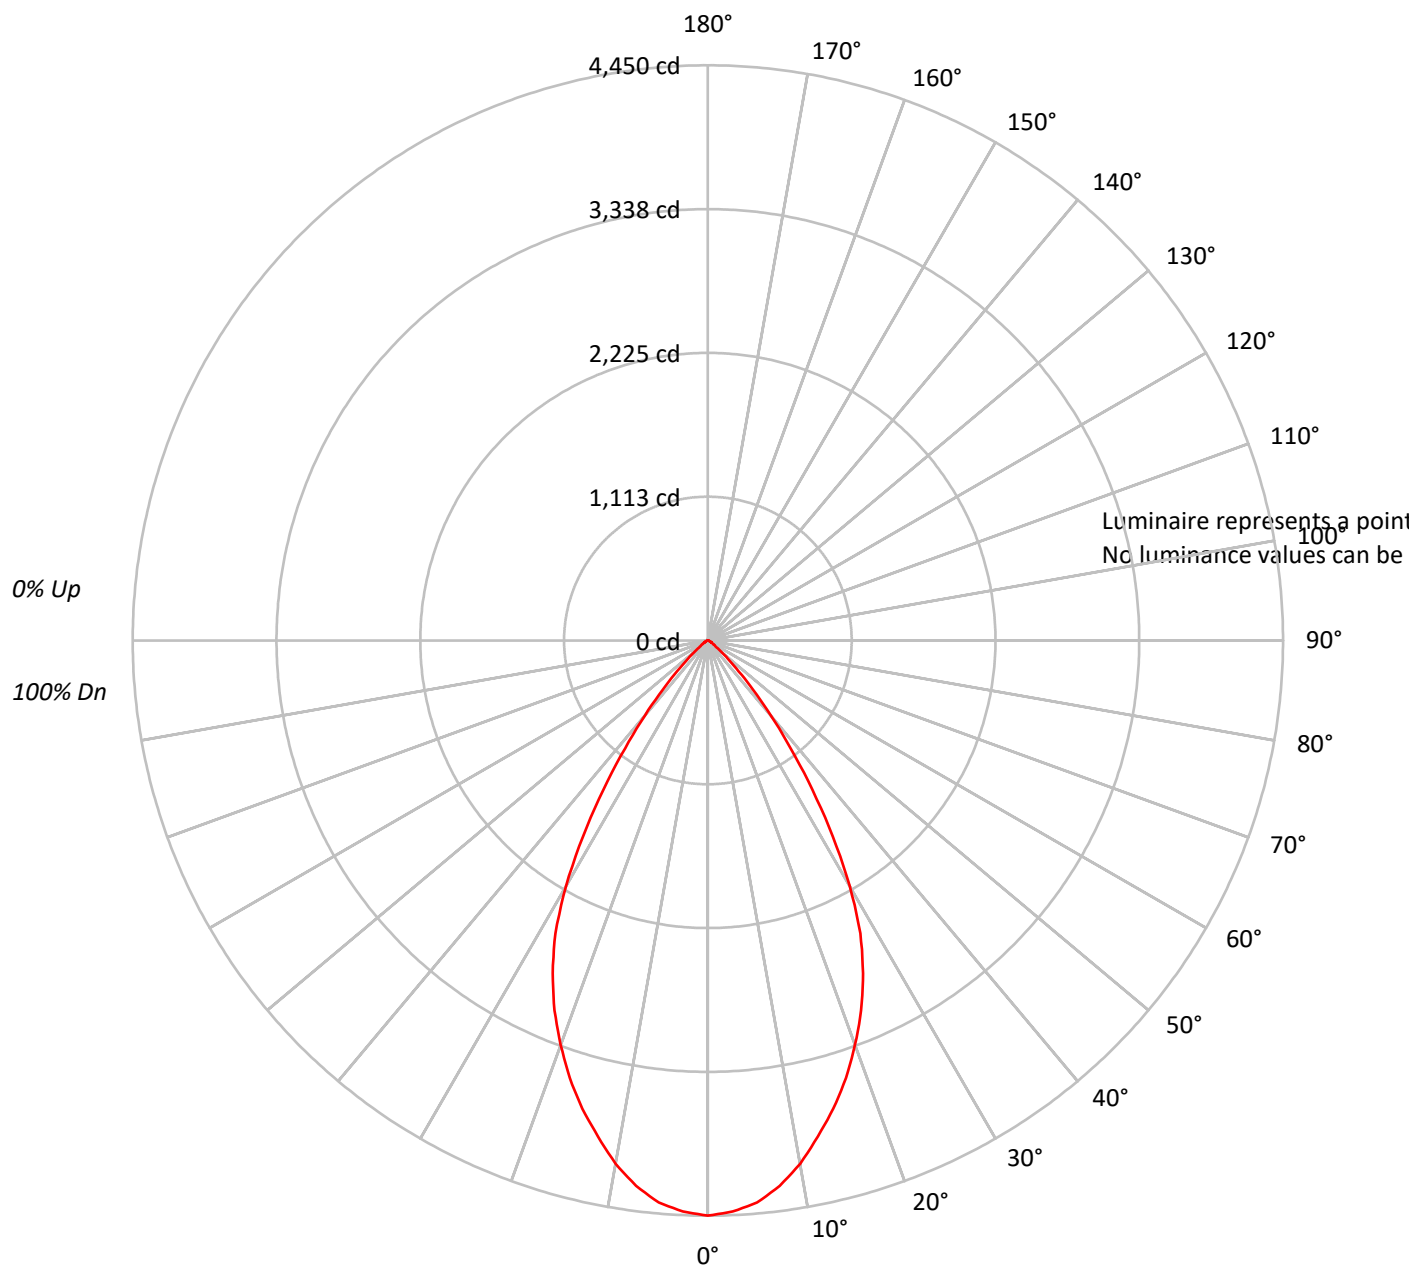



TEST NUMBER: P202676

CATALOG NUMBER: LD6B60D010TE EU6B60709030 6LBMWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97
2	108	103	99	95	105	101	97	94	98	95	92		95	92	90		92
3	102	95	90	86	100	94	89	86	91	88	84		89	86	83		87
4	97	89	83	79	95	88	83	79	86	81	78		84	80	77		82
5	92	83	77	73	90	82	77	73	80	76	72		79	75	71		77
6	87	78	72	67	85	77	71	67	76	71	67		74	70	66		73
7	83	73	67	63	81	72	67	63	71	66	62		70	65	62		69
8	78	69	63	58	77	68	62	58	67	62	58		66	61	58		65
9	75	65	59	55	73	64	59	55	63	58	54		62	58	54		62
10	71	61	55	51	70	61	55	51	60	55	51		59	54	51		58

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202676

CATALOG NUMBER: LD6B60D010TE EU6B60709030 6LBMWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	408.4	10.2
10°-20°	1048.4	26.2
20°-30°	1287.7	32.2
30°-40°	883.0	22.1
40°-50°	283.8	7.1
50°-60°	57.5	1.4
60°-70°	22.6	0.6
70°-80°	8.5	0.2
80°-90°	1.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2744.4	68.6
0°-40°	3627.4	90.7
0°-60°	3968.7	99.2
0°-90°	4001.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4001.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4450	
5°	4365	408
15°	3750	1048
25°	2841	1288
35°	1408	883
45°	336	284
55°	58	58
65°	24	23
75°	7	9
85°	0	1
90°	0	



TEST NUMBER: P202676

CATALOG NUMBER: LD6B60D010TE EU6B60709030 6LBMWMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	4449.6
2.5°	4422.5
5°	4364.8
7.5°	4256.2
10°	4110.2
12.5°	3930.3
15°	3750.4
17.5°	3550.2
20°	3329.6
22.5°	3098.8
25°	2840.8
27.5°	2555.7
30°	2196.0
32.5°	1798.9
35°	1408.5
37.5°	1052.2
40°	756.9
42.5°	515.9
45°	336.0
47.5°	207.0
50°	125.6
52.5°	78.1
55°	57.7
57.5°	44.1
60°	33.9
62.5°	27.2
65°	23.8
67.5°	17.0
70°	13.6
72.5°	10.2
75°	6.8
77.5°	6.8
80°	3.4
82.5°	3.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)