

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203706

Luminaire Tested: **LD6B60D010TE EU6B60709030 6LBNH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203706
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60709030 6LBNH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3207.8 lumens
Efficiency: N/A
Efficacy: 51.3 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.84
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203706

CATALOG NUMBER: LD6B60D010TE EU6B60709030 6LBNH1

Luminous Intensity Polar Plot

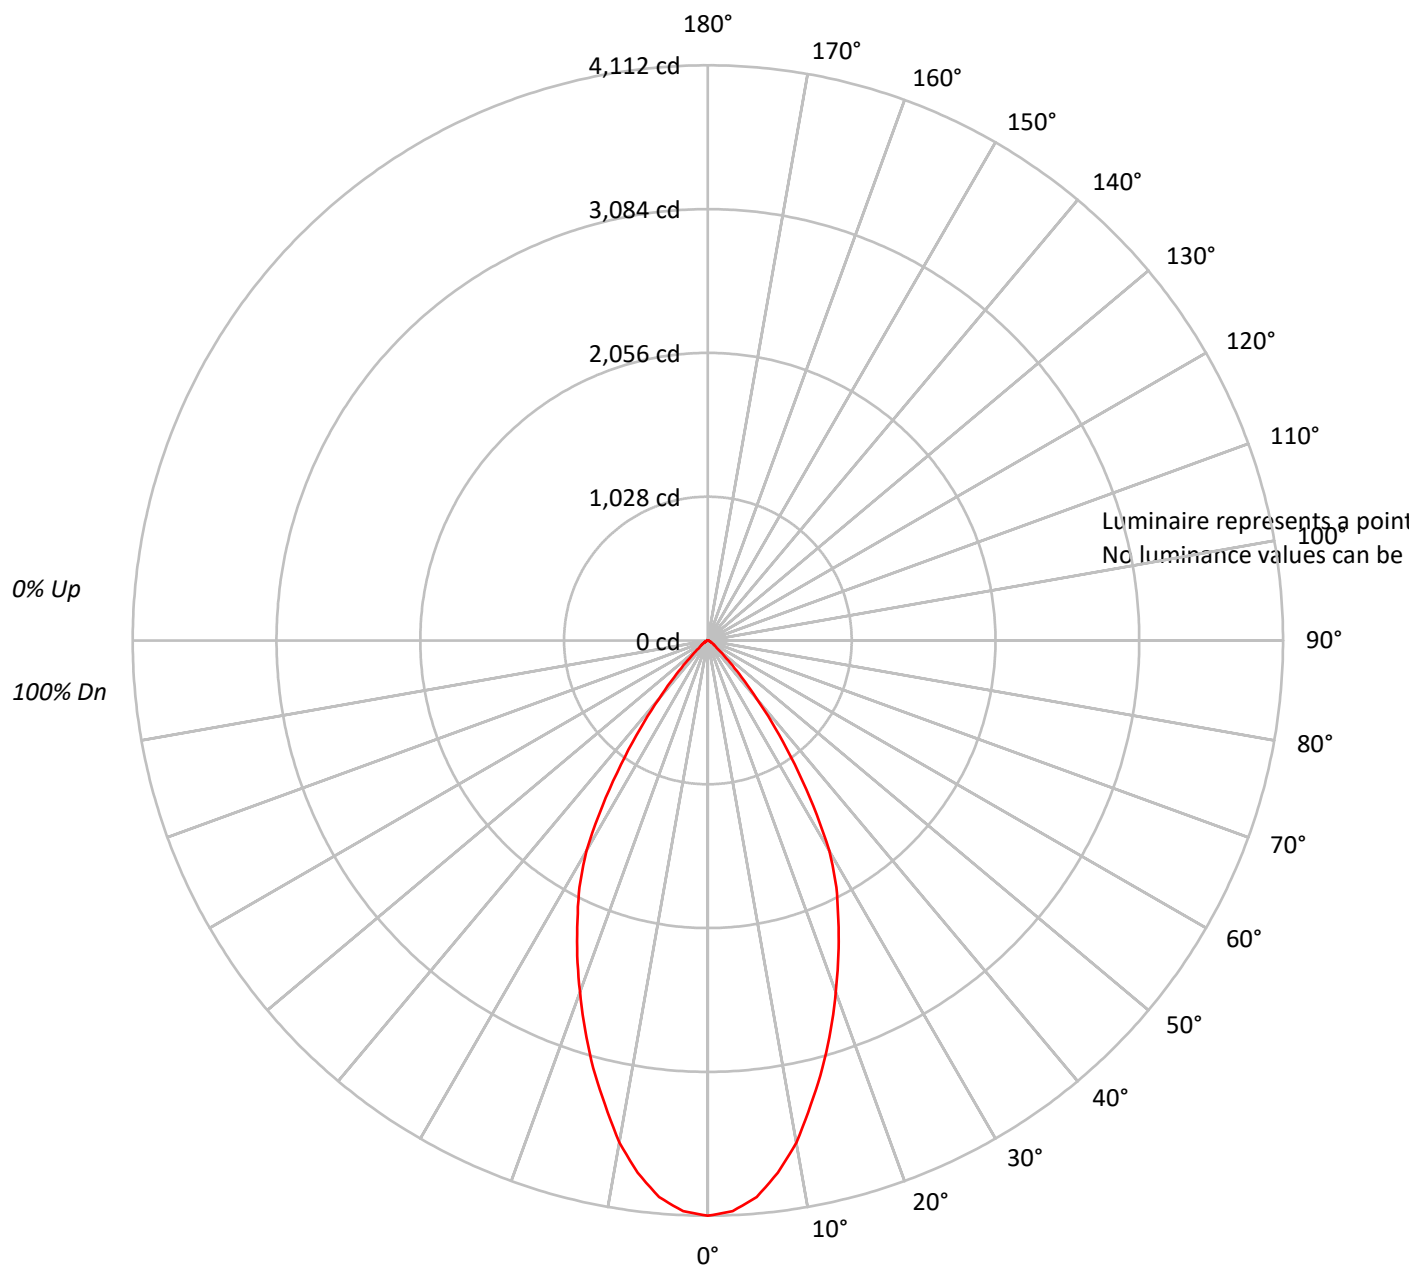



TEST NUMBER: P203706

CATALOG NUMBER: LD6B60D010TE EU6B60709030 6LBNH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	109	106	104	104	103	101		101	99	98		97
2	108	103	99	96	106	101	98	94	98	95	92		95	93	90		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	89	83	79	86	82	78		84	81	78		83
5	92	84	78	74	91	83	78	73	81	76	73		80	75	72		78
6	88	79	73	69	86	78	72	68	77	72	68		75	71	67		74
7	83	74	68	64	82	73	68	64	72	67	63		71	66	63		70
8	79	70	64	60	78	69	64	60	68	63	59		67	63	59		66
9	76	66	60	56	75	66	60	56	65	59	56		64	59	56		63
10	72	62	57	53	71	62	57	53	61	56	53		60	56	52		60

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203706

CATALOG NUMBER: LD6B60D010TE EU6B60709030 6LBNH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	369.8	11.5
10°-20°	881.9	27.5
20°-30°	1010.3	31.5
30°-40°	678.8	21.2
40°-50°	193.9	6.0
50°-60°	47.4	1.5
60°-70°	18.0	0.6
70°-80°	6.9	0.2
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2262.0	70.5
0°-40°	2940.8	91.7
0°-60°	3182.2	99.2
0°-90°	3207.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3207.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4112	
5°	3995	370
15°	3165	882
25°	2205	1010
35°	1082	679
45°	222	194
55°	53	47
65°	18	18
75°	6	7
85°	0	1
90°	0	



TEST NUMBER: P203706

CATALOG NUMBER: LD6B60D010TE EU6B60709030 6LBNH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	4112.3
2.5°	4083.0
5°	3995.3
7.5°	3837.4
10°	3644.3
12.5°	3398.6
15°	3164.6
17.5°	2919.0
20°	2673.3
22.5°	2439.3
25°	2205.3
27.5°	1988.9
30°	1737.3
32.5°	1403.9
35°	1082.2
37.5°	789.7
40°	544.0
42.5°	356.8
45°	222.3
47.5°	134.5
50°	81.9
52.5°	64.3
55°	52.6
57.5°	40.9
60°	29.2
62.5°	23.4
65°	17.5
67.5°	11.7
70°	11.7
72.5°	5.8
75°	5.8
77.5°	5.8
80°	5.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)