

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205253

Luminaire Tested: **LD6B60D010TE EU6B60709730 6LBWLI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205253  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B60D010TE EU6B60709730 6LBWL11  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4504.9 lumens  
Efficiency: N/A  
Efficacy: 72.1 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 62.48  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205253

CATALOG NUMBER: LD6B60D010TE EU6B60709730 6LBWLI1

### Luminous Intensity Polar Plot

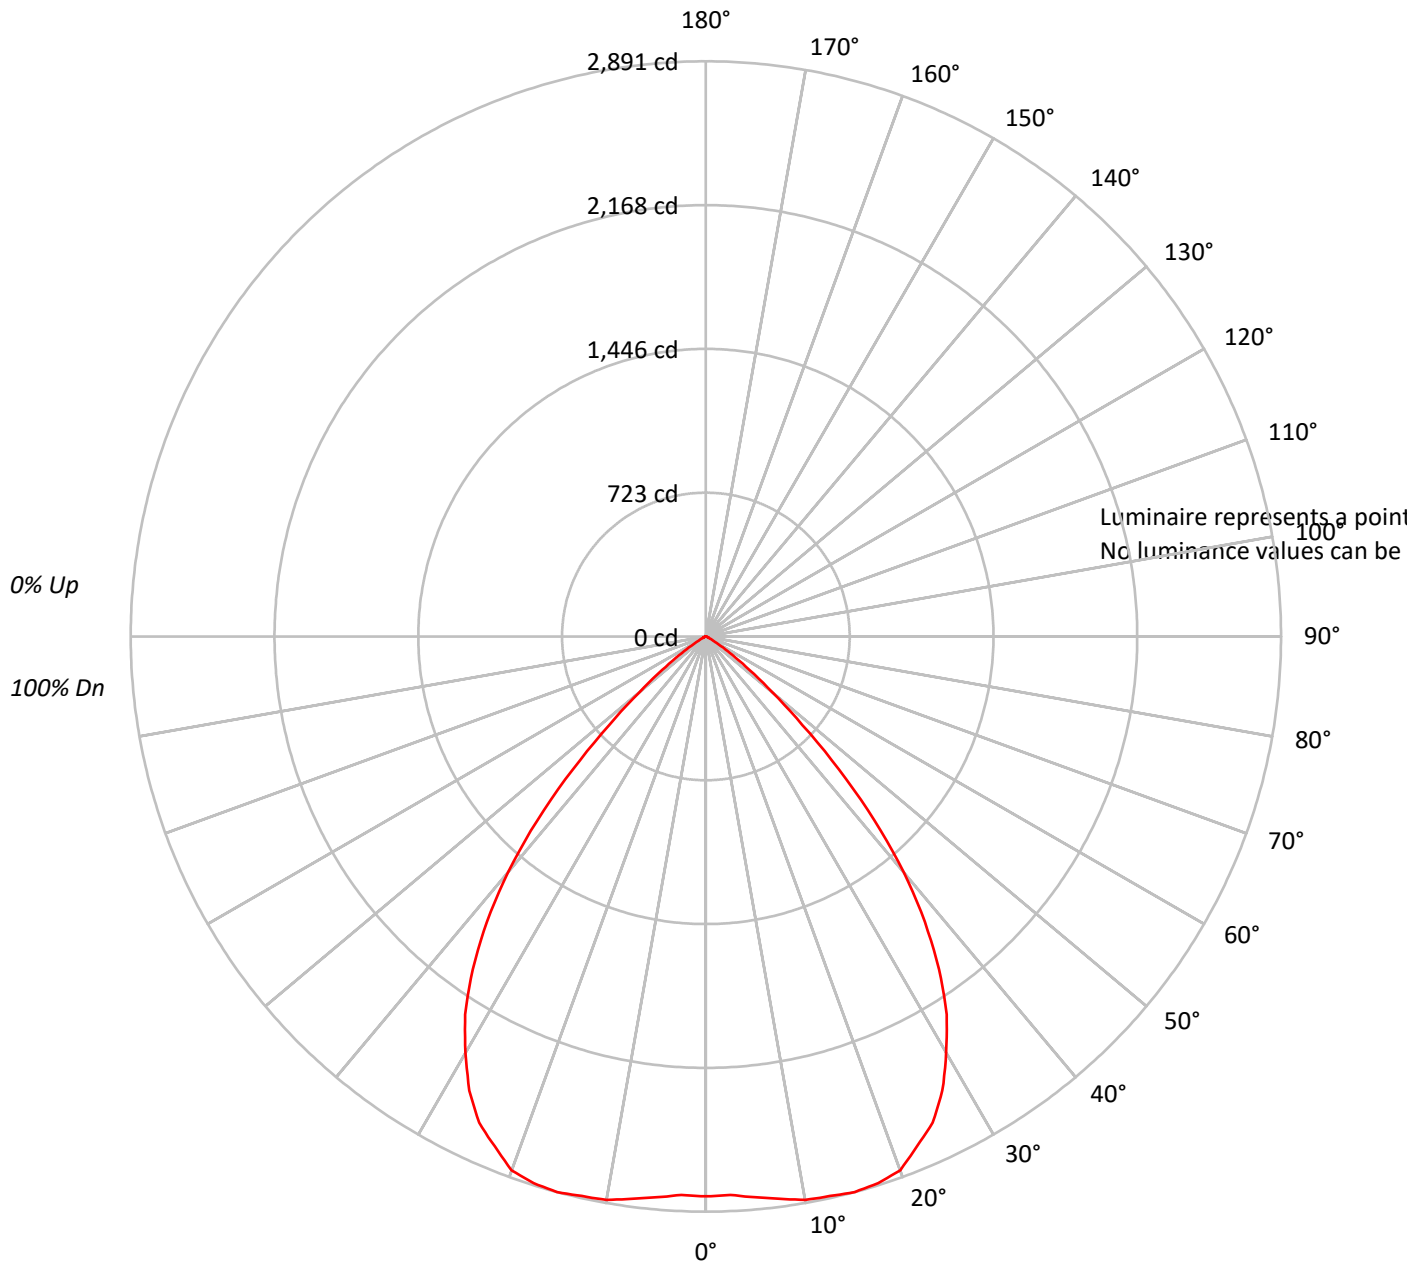


TEST NUMBER: P205253  
CATALOG NUMBER: LD6B60D010TE EU6B60709730 6LBWLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    |    |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |
| 1   | 113 | 110 | 107 | 104 | 110 | 107 | 105 | 103 | 103 | 101 | 99  | 100 | 98  | 97  | 96  | 95  | 94  | 92  |    |    |
| 2   | 106 | 101 | 96  | 92  | 104 | 99  | 95  | 91  | 95  | 92  | 89  | 92  | 90  | 87  | 90  | 87  | 85  | 83  |    |    |
| 3   | 100 | 92  | 87  | 82  | 97  | 91  | 86  | 81  | 88  | 84  | 80  | 86  | 82  | 79  | 83  | 80  | 77  | 76  |    |    |
| 4   | 93  | 85  | 78  | 73  | 92  | 84  | 78  | 73  | 81  | 76  | 72  | 79  | 75  | 71  | 77  | 74  | 70  | 69  |    |    |
| 5   | 88  | 78  | 71  | 66  | 86  | 77  | 71  | 66  | 75  | 70  | 65  | 73  | 69  | 65  | 72  | 68  | 64  | 63  |    |    |
| 6   | 82  | 72  | 65  | 60  | 81  | 71  | 65  | 60  | 70  | 64  | 59  | 68  | 63  | 59  | 67  | 62  | 59  | 57  |    |    |
| 7   | 77  | 67  | 60  | 55  | 76  | 66  | 59  | 55  | 65  | 59  | 54  | 63  | 58  | 54  | 62  | 57  | 54  | 52  |    |    |
| 8   | 73  | 62  | 55  | 50  | 71  | 61  | 55  | 50  | 60  | 54  | 50  | 59  | 54  | 50  | 58  | 53  | 49  | 48  |    |    |
| 9   | 69  | 57  | 51  | 46  | 67  | 57  | 50  | 46  | 56  | 50  | 46  | 55  | 50  | 46  | 54  | 49  | 46  | 44  |    |    |
| 10  | 65  | 54  | 47  | 43  | 64  | 53  | 47  | 43  | 52  | 46  | 42  | 51  | 46  | 42  | 51  | 46  | 42  | 41  |    |    |

AVERAGE LUMINANCE (cd/sqm):

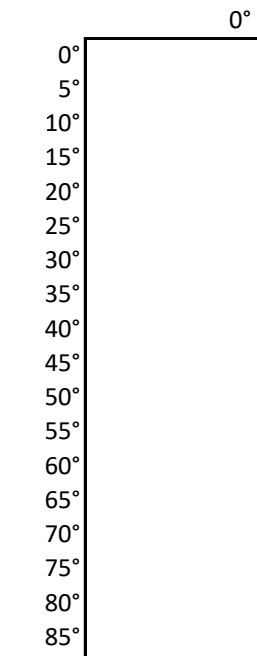



TEST NUMBER: P205253

CATALOG NUMBER: LD6B60D010TE EU6B60709730 6LBWLI1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 271.5  | 6.0       |
| 10°-20°   | 816.0  | 18.1      |
| 20°-30°   | 1230.1 | 27.3      |
| 30°-40°   | 1259.1 | 27.9      |
| 40°-50°   | 733.5  | 16.3      |
| 50°-60°   | 168.5  | 3.7       |
| 60°-70°   | 20.7   | 0.5       |
| 70°-80°   | 5.4    | 0.1       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 2317.7 | 51.4      |
| 0°-40°    | 3576.8 | 79.4      |
| 0°-60°    | 4478.8 | 99.4      |
| 0°-90°    | 4504.9 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 4504.9 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2814 |      |
| 5°  | 2830 | 272  |
| 15° | 2891 | 816  |
| 25° | 2697 | 1230 |
| 35° | 2043 | 1259 |
| 45° | 945  | 734  |
| 55° | 163  | 169  |
| 65° | 15   | 21   |
| 75° | 5    | 5    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P205253

CATALOG NUMBER: LD6B60D010TE EU6B60709730 6LBWLI1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 2814.3 |
| 2.5°  | 2809.2 |
| 5°    | 2829.6 |
| 7.5°  | 2850.1 |
| 10°   | 2875.6 |
| 12.5° | 2880.7 |
| 15°   | 2890.9 |
| 17.5° | 2880.7 |
| 20°   | 2855.2 |
| 22.5° | 2773.5 |
| 25°   | 2696.8 |
| 27.5° | 2574.3 |
| 30°   | 2415.9 |
| 32.5° | 2252.5 |
| 35°   | 2043.1 |
| 37.5° | 1808.1 |
| 40°   | 1547.6 |
| 42.5° | 1256.5 |
| 45°   | 944.9  |
| 47.5° | 658.9  |
| 50°   | 434.2  |
| 52.5° | 275.8  |
| 55°   | 163.4  |
| 57.5° | 86.8   |
| 60°   | 46.0   |
| 62.5° | 25.5   |
| 65°   | 15.3   |
| 67.5° | 15.3   |
| 70°   | 10.2   |
| 72.5° | 5.1    |
| 75°   | 5.1    |
| 77.5° | 5.1    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)