

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205556

Luminaire Tested: **LD6B60D010TE EU6B60709035 6LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205556
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60709035 6LBMGPH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2886.4 lumens
Efficiency: N/A
Efficacy: 46.2 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205556

CATALOG NUMBER: LD6B60D010TE EU6B60709035 6LBMGPH1

Luminous Intensity Polar Plot

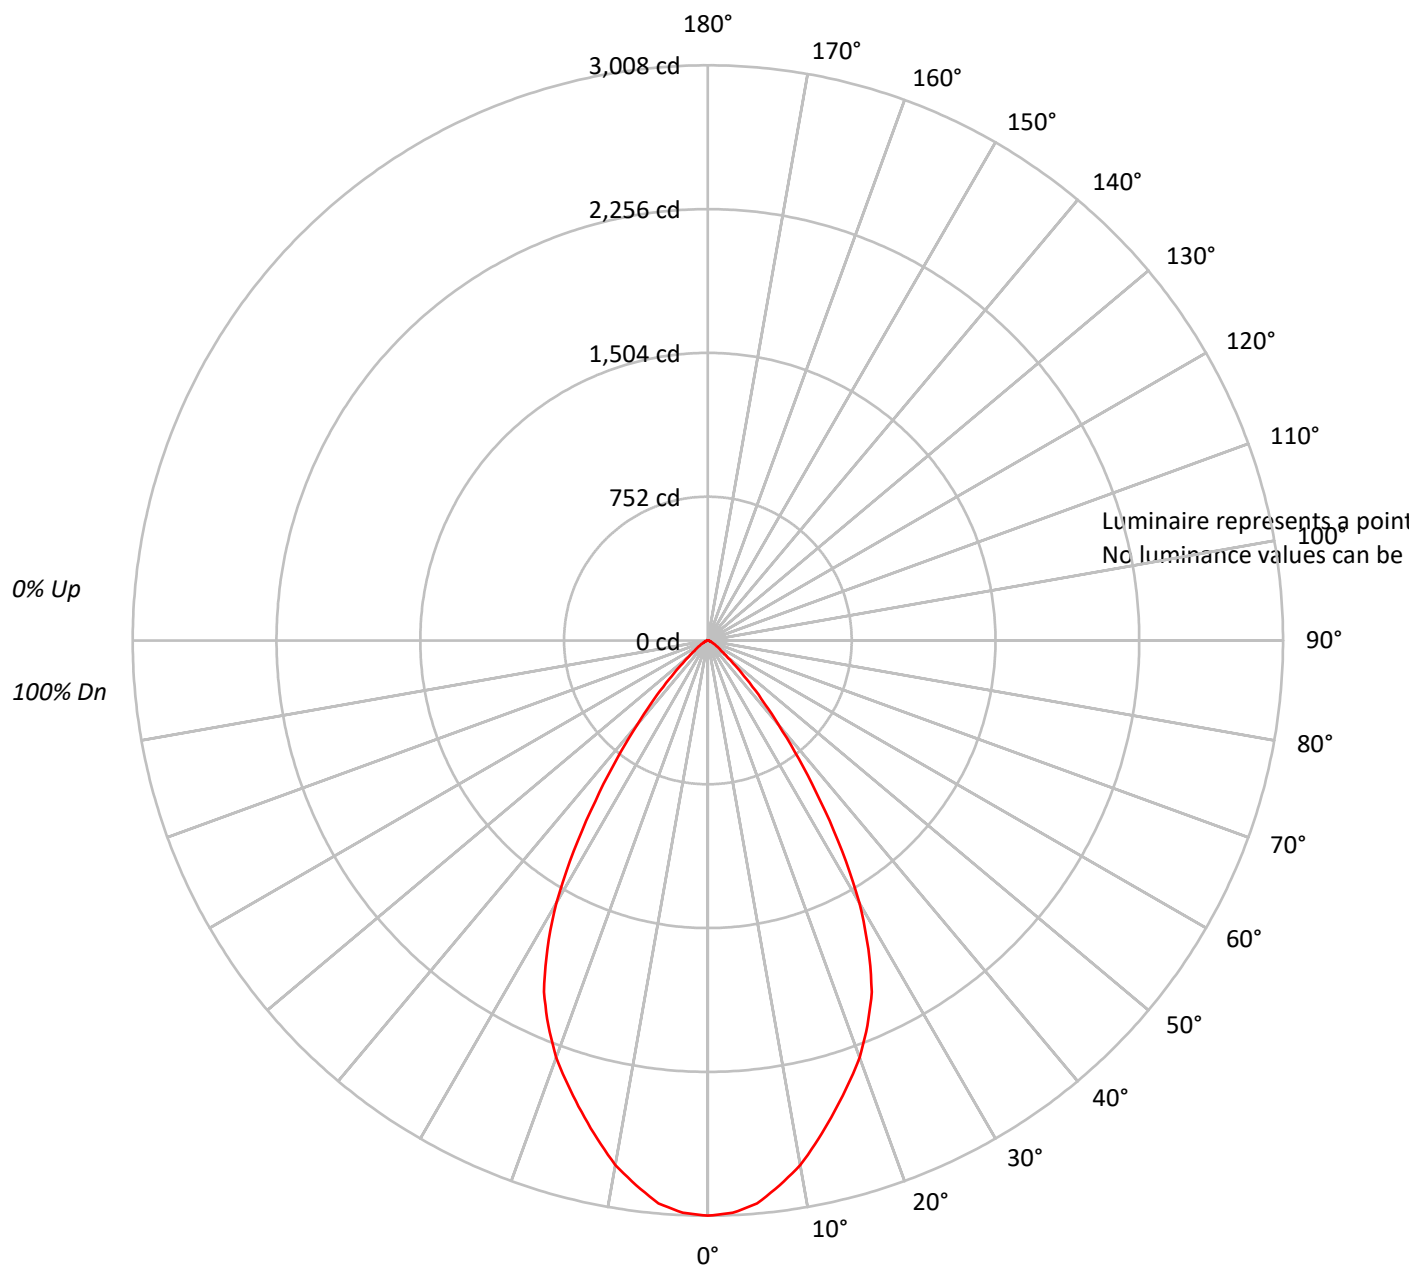




TEST NUMBER: P205556

CATALOG NUMBER: LD6B60D010TE EU6B60709035 6LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	105	111	108	106	104		104	102	101		100	99	98		97	96	95
2	107	102	98	94	105	100	97	93		97	94	91		94	92	89		91	89	87
3	102	95	90	85	100	93	89	85		91	87	83		88	85	82		86	83	81
4	96	88	82	78	94	87	82	77		85	80	77		83	79	76		81	78	75
5	91	82	76	72	89	81	76	71		79	74	71		78	73	70		76	72	69
6	86	77	71	66	85	76	70	66		74	69	65		73	68	65		72	68	64
7	82	72	66	61	80	71	65	61		70	65	61		69	64	60		68	63	60
8	77	68	61	57	76	67	61	57		66	60	57		65	60	56		64	59	56
9	74	64	57	53	72	63	57	53		62	57	53		61	56	53		60	56	53
10	70	60	54	50	69	59	54	50		59	53	50		58	53	49		57	53	49

AVERAGE LUMINANCE (cd/sqm):

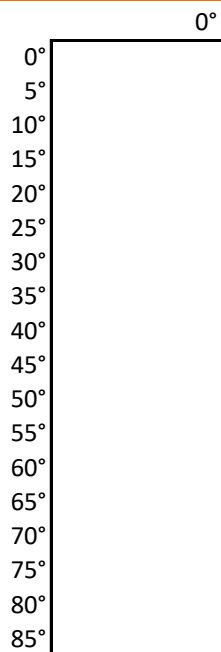



TEST NUMBER: P205556

CATALOG NUMBER: LD6B60D010TE EU6B60709035 6LBMGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.3	9.6
10°-20°	717.0	24.8
20°-30°	913.5	31.6
30°-40°	645.6	22.4
40°-50°	235.7	8.2
50°-60°	65.3	2.3
60°-70°	23.7	0.8
70°-80°	8.4	0.3
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1906.9	66.1
0°-40°	2552.5	88.4
0°-60°	2853.5	98.9
0°-90°	2886.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2886.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3008	
5°	2955	276
15°	2553	717
25°	2028	914
35°	1026	646
45°	286	236
55°	70	65
65°	23	24
75°	6	8
85°	0	1
90°	0	



TEST NUMBER: P205556

CATALOG NUMBER: LD6B60D010TE EU6B60709035 6LBMGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3007.8
2.5°	2996.2
5°	2955.4
7.5°	2873.8
10°	2786.3
12.5°	2669.7
15°	2553.2
17.5°	2436.6
20°	2320.0
22.5°	2180.1
25°	2028.5
27.5°	1818.7
30°	1585.5
32.5°	1305.7
35°	1025.9
37.5°	781.1
40°	571.3
42.5°	413.9
45°	285.6
47.5°	192.4
50°	128.2
52.5°	87.4
55°	69.9
57.5°	52.5
60°	40.8
62.5°	29.1
65°	23.3
67.5°	17.5
70°	11.7
72.5°	11.7
75°	5.8
77.5°	5.8
80°	5.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)