

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204635

Luminaire Tested: **LD6B60D010TE EU6B60709035 6LBSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204635  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B60D010TE EU6B60709035 6LB5MW1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH MATTE WHITE TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5618.7 lumens  
Efficiency: N/A  
Efficacy: 89.9 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 62.48  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204635

CATALOG NUMBER: LD6B60D010TE EU6B60709035 6LB5MW1

### Luminous Intensity Polar Plot

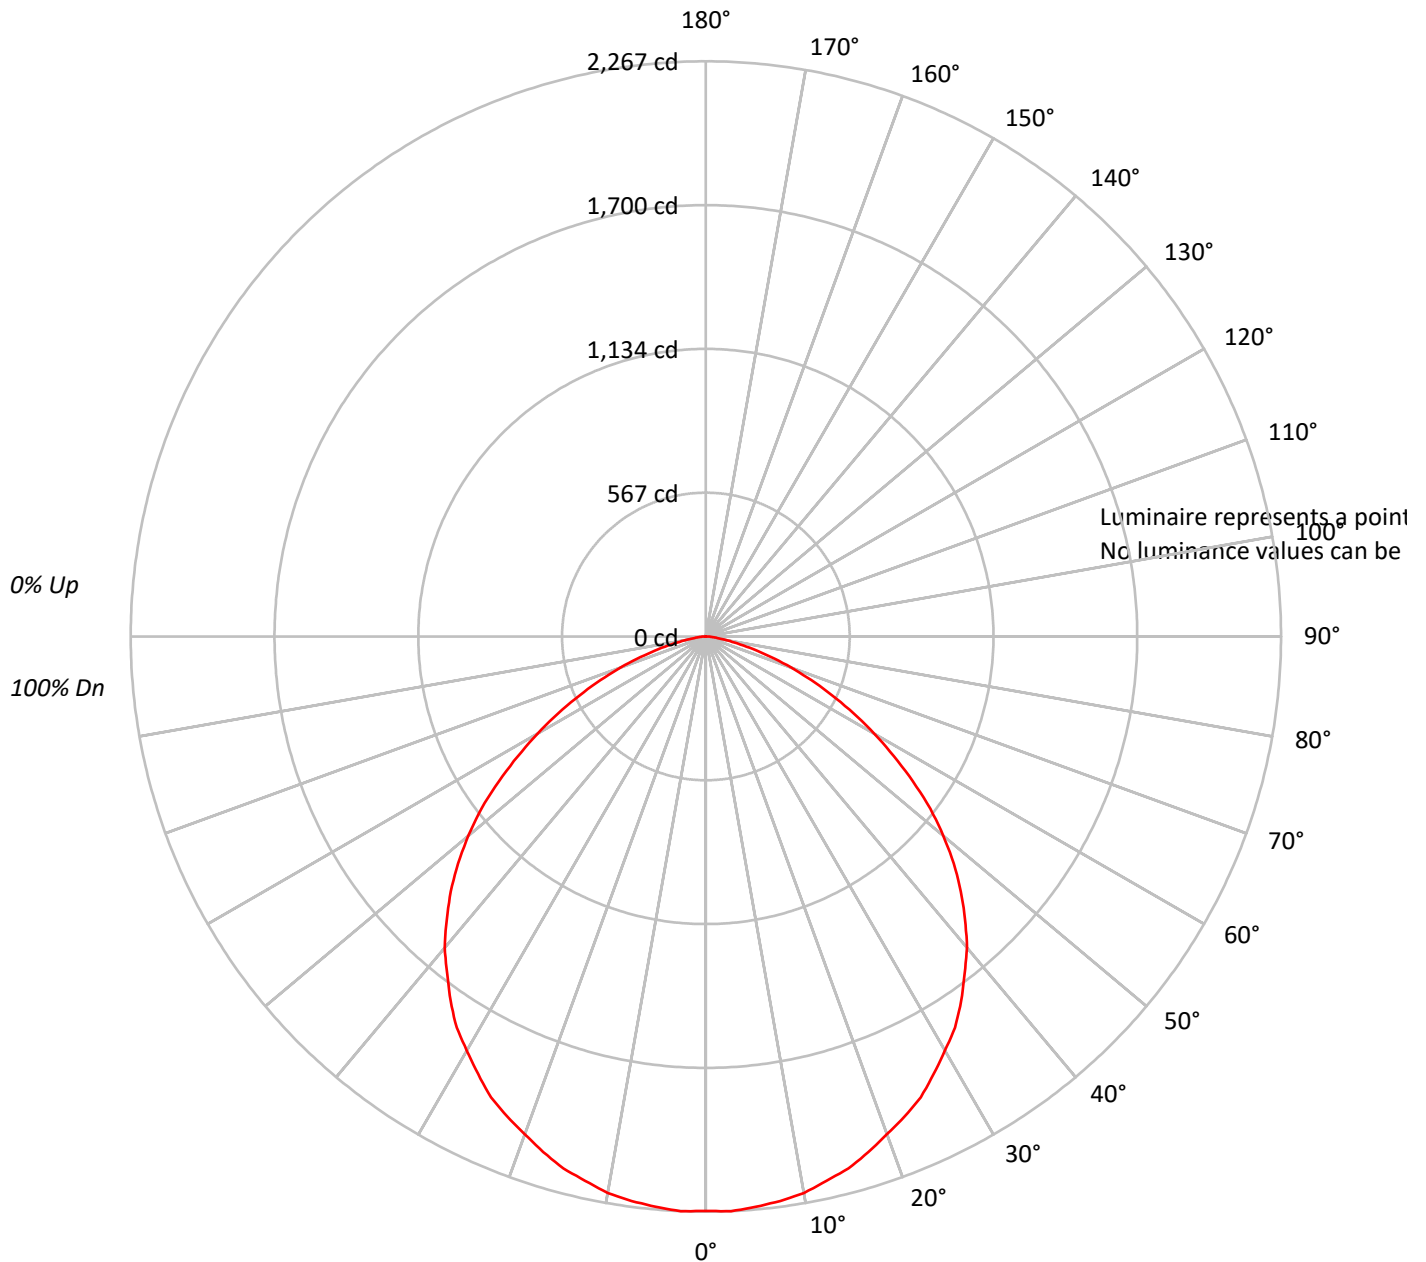



TEST NUMBER: P204635

CATALOG NUMBER: LD6B60D010TE EU6B60709035 6LBSMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 110 | 106 | 102 | 99  | 107 | 104 | 100 | 97  | 99  | 97  | 94  |  | 96  | 93  | 91  |  | 92  |
| 2   | 101 | 93  | 87  | 82  | 98  | 92  | 86  | 81  | 88  | 83  | 79  |  | 85  | 81  | 77  |  | 82  |
| 3   | 93  | 83  | 75  | 69  | 90  | 81  | 74  | 69  | 78  | 72  | 67  |  | 76  | 70  | 66  |  | 73  |
| 4   | 85  | 74  | 66  | 59  | 83  | 72  | 65  | 59  | 70  | 63  | 58  |  | 68  | 62  | 57  |  | 66  |
| 5   | 78  | 66  | 58  | 51  | 76  | 65  | 57  | 51  | 63  | 56  | 51  |  | 61  | 55  | 50  |  | 59  |
| 6   | 73  | 60  | 51  | 45  | 71  | 59  | 51  | 45  | 57  | 50  | 44  |  | 55  | 49  | 44  |  | 54  |
| 7   | 67  | 54  | 46  | 40  | 66  | 54  | 46  | 40  | 52  | 45  | 40  |  | 51  | 44  | 39  |  | 49  |
| 8   | 63  | 50  | 41  | 36  | 61  | 49  | 41  | 36  | 48  | 41  | 35  |  | 46  | 40  | 35  |  | 45  |
| 9   | 59  | 46  | 38  | 32  | 57  | 45  | 37  | 32  | 44  | 37  | 32  |  | 43  | 36  | 32  |  | 42  |
| 10  | 55  | 42  | 34  | 29  | 54  | 42  | 34  | 29  | 41  | 34  | 29  |  | 40  | 33  | 29  |  | 39  |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204635

CATALOG NUMBER: LD6B60D010TE EU6B60709035 6LBSMW1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 214.5  | 3.8       |
| 10°-20°   | 611.4  | 10.9      |
| 20°-30°   | 920.8  | 16.4      |
| 30°-40°   | 1095.7 | 19.5      |
| 40°-50°   | 1093.7 | 19.5      |
| 50°-60°   | 889.4  | 15.8      |
| 60°-70°   | 547.2  | 9.7       |
| 70°-80°   | 212.0  | 3.8       |
| 80°-90°   | 33.9   | 0.6       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1746.7 | 31.1      |
| 0°-40°    | 2842.4 | 50.6      |
| 0°-60°    | 4825.5 | 85.9      |
| 0°-90°    | 5618.7 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 5618.7 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2264 |      |
| 5°  | 2257 | 214  |
| 15° | 2171 | 611  |
| 25° | 2004 | 921  |
| 35° | 1754 | 1096 |
| 45° | 1422 | 1094 |
| 55° | 995  | 889  |
| 65° | 549  | 547  |
| 75° | 193  | 212  |
| 85° | 27   | 34   |
| 90° | 0    |      |



TEST NUMBER: P204635

CATALOG NUMBER: LD6B60D010TE EU6B60709035 6LBSMW1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 2263.8 |
| 2.5°  | 2267.1 |
| 5°    | 2257.1 |
| 7.5°  | 2243.8 |
| 10°   | 2227.2 |
| 12.5° | 2197.2 |
| 15°   | 2170.6 |
| 17.5° | 2130.6 |
| 20°   | 2087.3 |
| 22.5° | 2047.4 |
| 25°   | 2004.1 |
| 27.5° | 1944.2 |
| 30°   | 1884.3 |
| 32.5° | 1827.7 |
| 35°   | 1754.4 |
| 37.5° | 1674.5 |
| 40°   | 1601.3 |
| 42.5° | 1511.4 |
| 45°   | 1421.5 |
| 47.5° | 1325.0 |
| 50°   | 1221.8 |
| 52.5° | 1115.2 |
| 55°   | 995.4  |
| 57.5° | 878.9  |
| 60°   | 765.7  |
| 62.5° | 655.8  |
| 65°   | 549.3  |
| 67.5° | 449.4  |
| 70°   | 356.2  |
| 72.5° | 269.7  |
| 75°   | 193.1  |
| 77.5° | 126.5  |
| 80°   | 76.6   |
| 82.5° | 46.6   |
| 85°   | 26.6   |
| 87.5° | 13.3   |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)