

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203291

Luminaire Tested: **LD6B60D010TE EU6B60708050 6LBMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203291
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60708050 6LBMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4519.2 lumens
Efficiency: N/A
Efficacy: 72.3 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203291

CATALOG NUMBER: LD6B60D010TE EU6B60708050 6LBMH1

Luminous Intensity Polar Plot

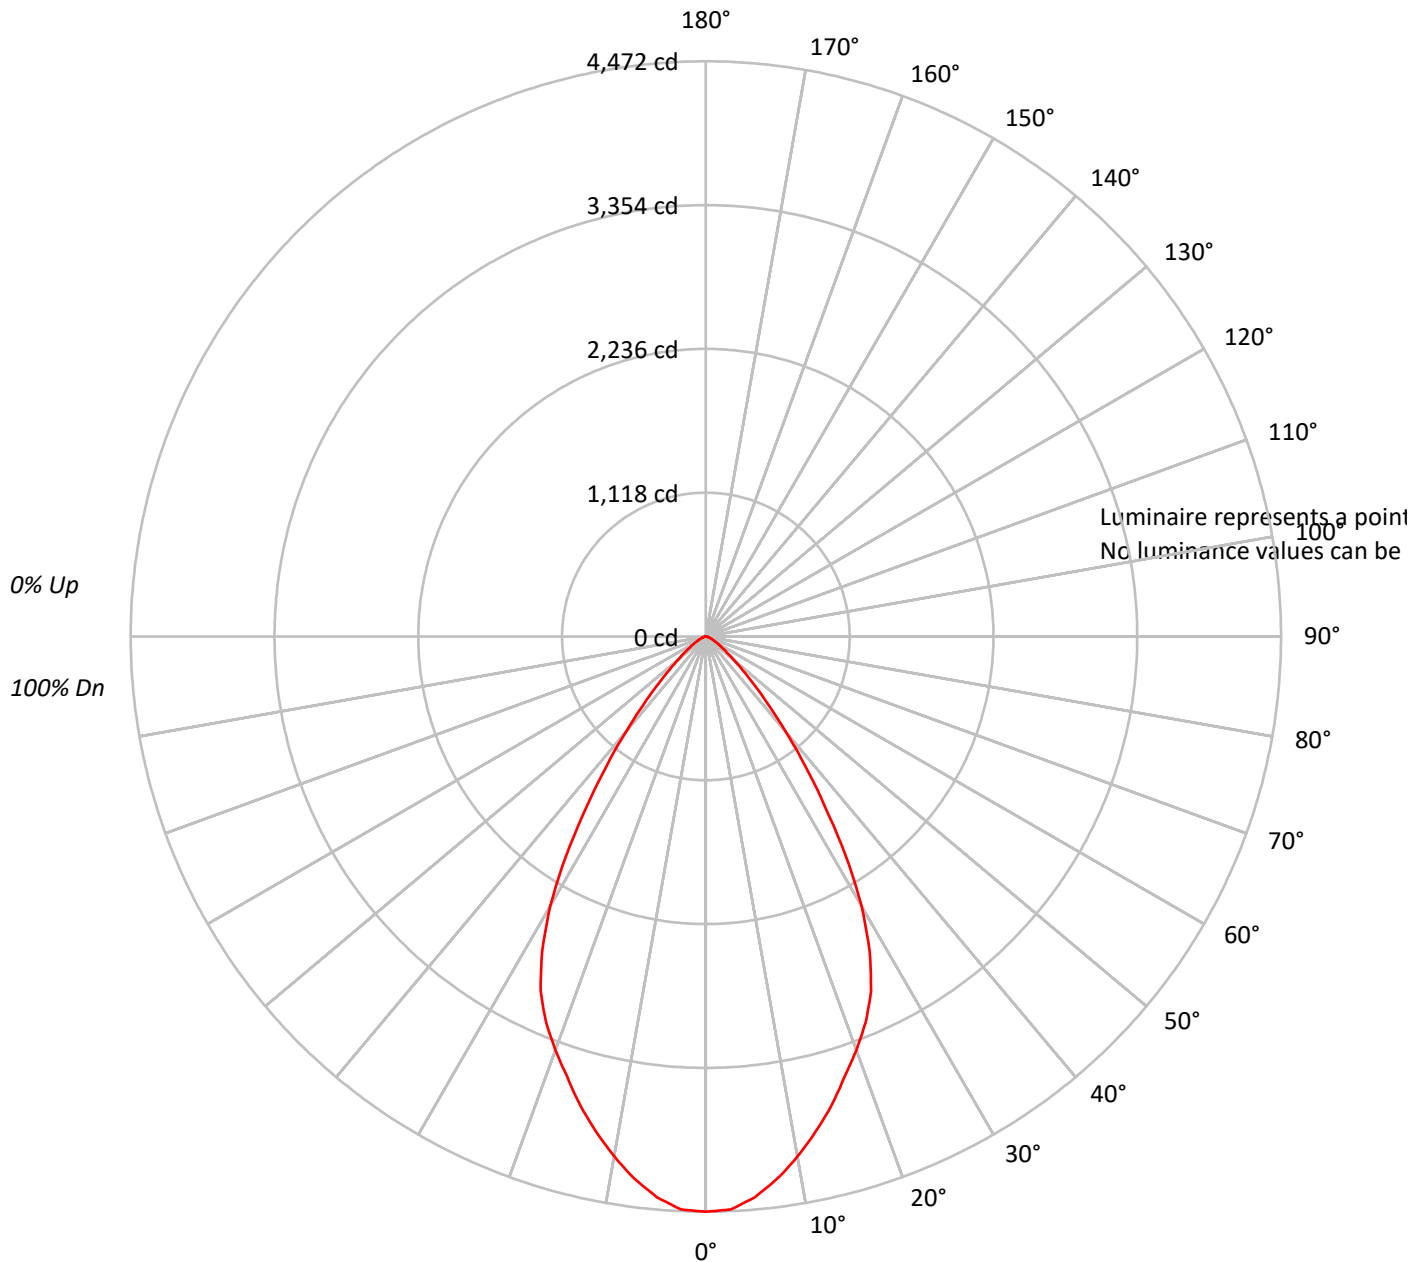



TEST NUMBER: P203291

CATALOG NUMBER: LD6B60D010TE EU6B60708050 6LBMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	105		111	108	105	103		104	102	100		100	99	97		97	95	94
2	107	102	97	93		105	100	96	92		97	93	90		94	91	88		91	89	87
3	101	94	88	84		99	92	87	84		90	86	82		87	84	81		85	82	80
4	95	87	81	76		93	86	80	76		84	79	75		82	78	74		80	76	73
5	90	81	75	70		88	80	74	70		78	73	69		76	72	68		75	71	68
6	85	75	69	64		83	75	69	64		73	68	64		72	67	63		70	66	63
7	80	70	64	59		79	70	64	59		68	63	59		67	62	59		66	62	58
8	76	66	60	55		75	65	59	55		64	59	55		63	58	55		62	58	54
9	72	62	56	51		71	61	55	51		60	55	51		60	55	51		59	54	51
10	69	58	52	48		68	58	52	48		57	52	48		56	51	48		55	51	48

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203291

CATALOG NUMBER: LD6B60D010TE EU6B60708050 6LBMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	408.9	9.0
10°-20°	1057.9	23.4
20°-30°	1370.7	30.3
30°-40°	1017.6	22.5
40°-50°	429.6	9.5
50°-60°	152.6	3.4
60°-70°	58.9	1.3
70°-80°	20.4	0.5
80°-90°	2.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2837.5	62.8
0°-40°	3855.1	85.3
0°-60°	4437.3	98.2
0°-90°	4519.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4519.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4472	
5°	4375	409
15°	3775	1058
25°	3040	1371
35°	1613	1018
45°	529	430
55°	161	153
65°	58	59
75°	19	20
85°	0	3
90°	0	



TEST NUMBER: P203291

CATALOG NUMBER: LD6B60D010TE EU6B60708050 6LBMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	4472.2
2.5°	4459.3
5°	4375.4
7.5°	4252.8
10°	4104.4
12.5°	3943.1
15°	3775.3
17.5°	3588.1
20°	3420.3
22.5°	3246.1
25°	3039.6
27.5°	2755.6
30°	2420.0
32.5°	2026.4
35°	1613.4
37.5°	1264.9
40°	961.6
42.5°	716.3
45°	529.2
47.5°	387.2
50°	284.0
52.5°	213.0
55°	161.3
57.5°	122.6
60°	96.8
62.5°	71.0
65°	58.1
67.5°	45.2
70°	32.3
72.5°	25.8
75°	19.4
77.5°	12.9
80°	6.5
82.5°	6.5
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)