

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203188

Luminaire Tested: **LD6B60D010TE EU6B60708050 6LBWMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203188
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60708050 6LBWMW1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5843.7 lumens
Efficiency: N/A
Efficacy: 93.5 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203188

CATALOG NUMBER: LD6B60D010TE EU6B60708050 6LBWMW1

Luminous Intensity Polar Plot

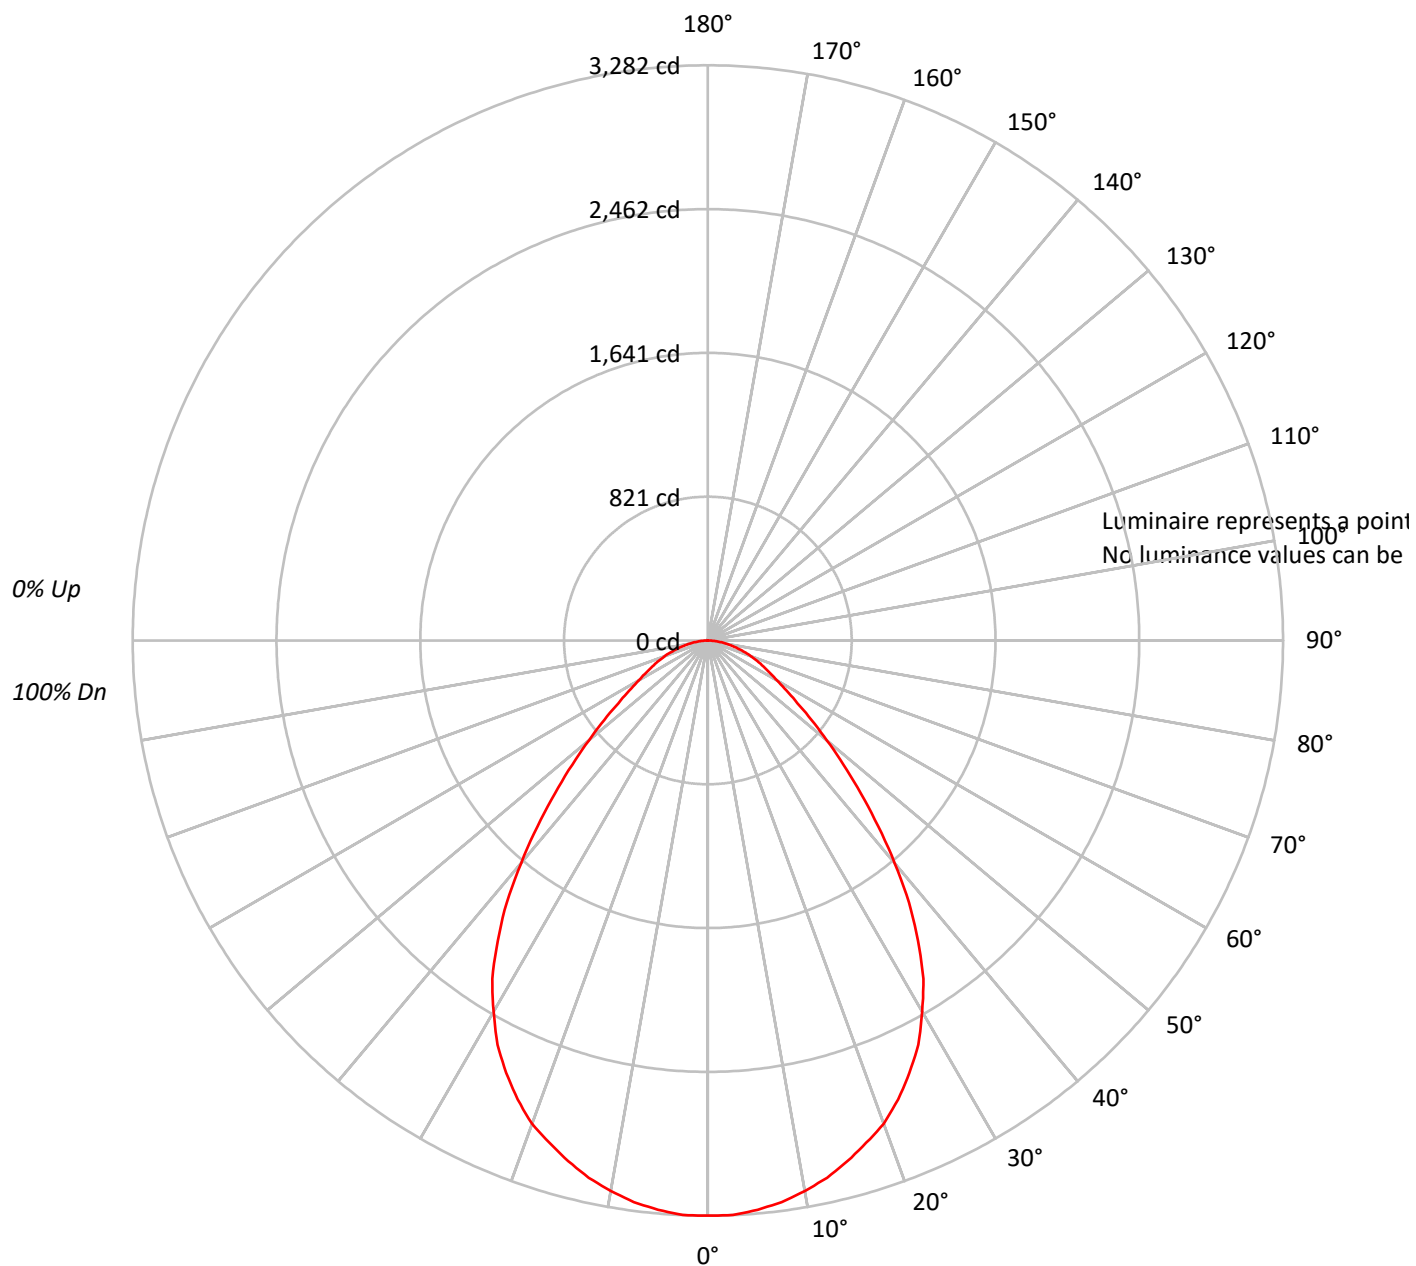




TEST NUMBER: P203188

CATALOG NUMBER: LD6B60D010TE EU6B60708050 6LBWMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	104	100		108	105	102	99		101	98	96		97	95	93		93	92	90
2	103	96	90	86		100	94	89	85		91	86	83		88	84	81		85	82	79
3	95	86	80	74		93	85	79	74		82	77	72		80	75	71		77	73	70
4	89	78	71	65		86	77	70	65		75	69	64		72	67	63		70	66	62
5	82	71	64	58		80	70	63	58		68	62	57		66	61	56		65	60	56
6	77	65	57	52		75	64	57	52		63	56	51		61	55	51		60	54	50
7	72	60	52	47		70	59	52	47		58	51	46		56	50	46		55	50	46
8	67	55	48	42		66	55	47	42		53	47	42		52	46	42		51	46	42
9	63	51	44	39		62	51	44	39		50	43	39		49	43	38		48	42	38
10	60	48	40	36		58	47	40	36		46	40	36		45	40	35		45	39	35

AVERAGE LUMINANCE (cd/sqm):

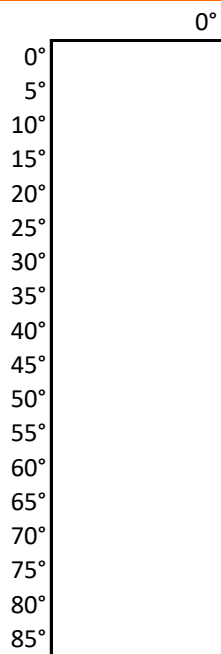



TEST NUMBER: P203188

CATALOG NUMBER: LD6B60D010TE EU6B60708050 6LBWMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	309.0	5.3
10°-20°	866.7	14.8
20°-30°	1248.8	21.4
30°-40°	1296.5	22.2
40°-50°	958.6	16.4
50°-60°	572.6	9.8
60°-70°	347.9	6.0
70°-80°	190.6	3.3
80°-90°	53.0	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2424.5	41.5
0°-40°	3721.0	63.7
0°-60°	5252.2	89.9
0°-90°	5843.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5843.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3282	
5°	3260	309
15°	3076	867
25°	2722	1249
35°	2091	1297
45°	1233	959
55°	624	573
65°	347	348
75°	177	191
85°	42	53
90°	0	



TEST NUMBER: P203188

CATALOG NUMBER: LD6B60D010TE EU6B60708050 6LBWMW1

CANDELA DISTRIBUTION (FULL):

0°	
0°	3281.6
2.5°	3281.6
5°	3260.4
7.5°	3232.0
10°	3189.5
12.5°	3139.9
15°	3076.1
17.5°	3005.2
20°	2934.3
22.5°	2835.1
25°	2721.7
27.5°	2601.2
30°	2445.3
32.5°	2289.3
35°	2090.9
37.5°	1885.3
40°	1658.5
42.5°	1438.8
45°	1233.3
47.5°	1049.0
50°	886.0
52.5°	744.2
55°	623.7
57.5°	531.6
60°	453.6
62.5°	396.9
65°	347.3
67.5°	304.8
70°	262.2
72.5°	219.7
75°	177.2
77.5°	141.8
80°	106.3
82.5°	78.0
85°	42.5
87.5°	21.3
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)