

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203297

Luminaire Tested: **LD6B60D010TE EU6B60709050 6LBMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203297
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B60D010TE EU6B60709050 6LBMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3804.3 lumens
Efficiency: N/A
Efficacy: 60.9 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203297

CATALOG NUMBER: LD6B60D010TE EU6B60709050 6LBMH1

Luminous Intensity Polar Plot

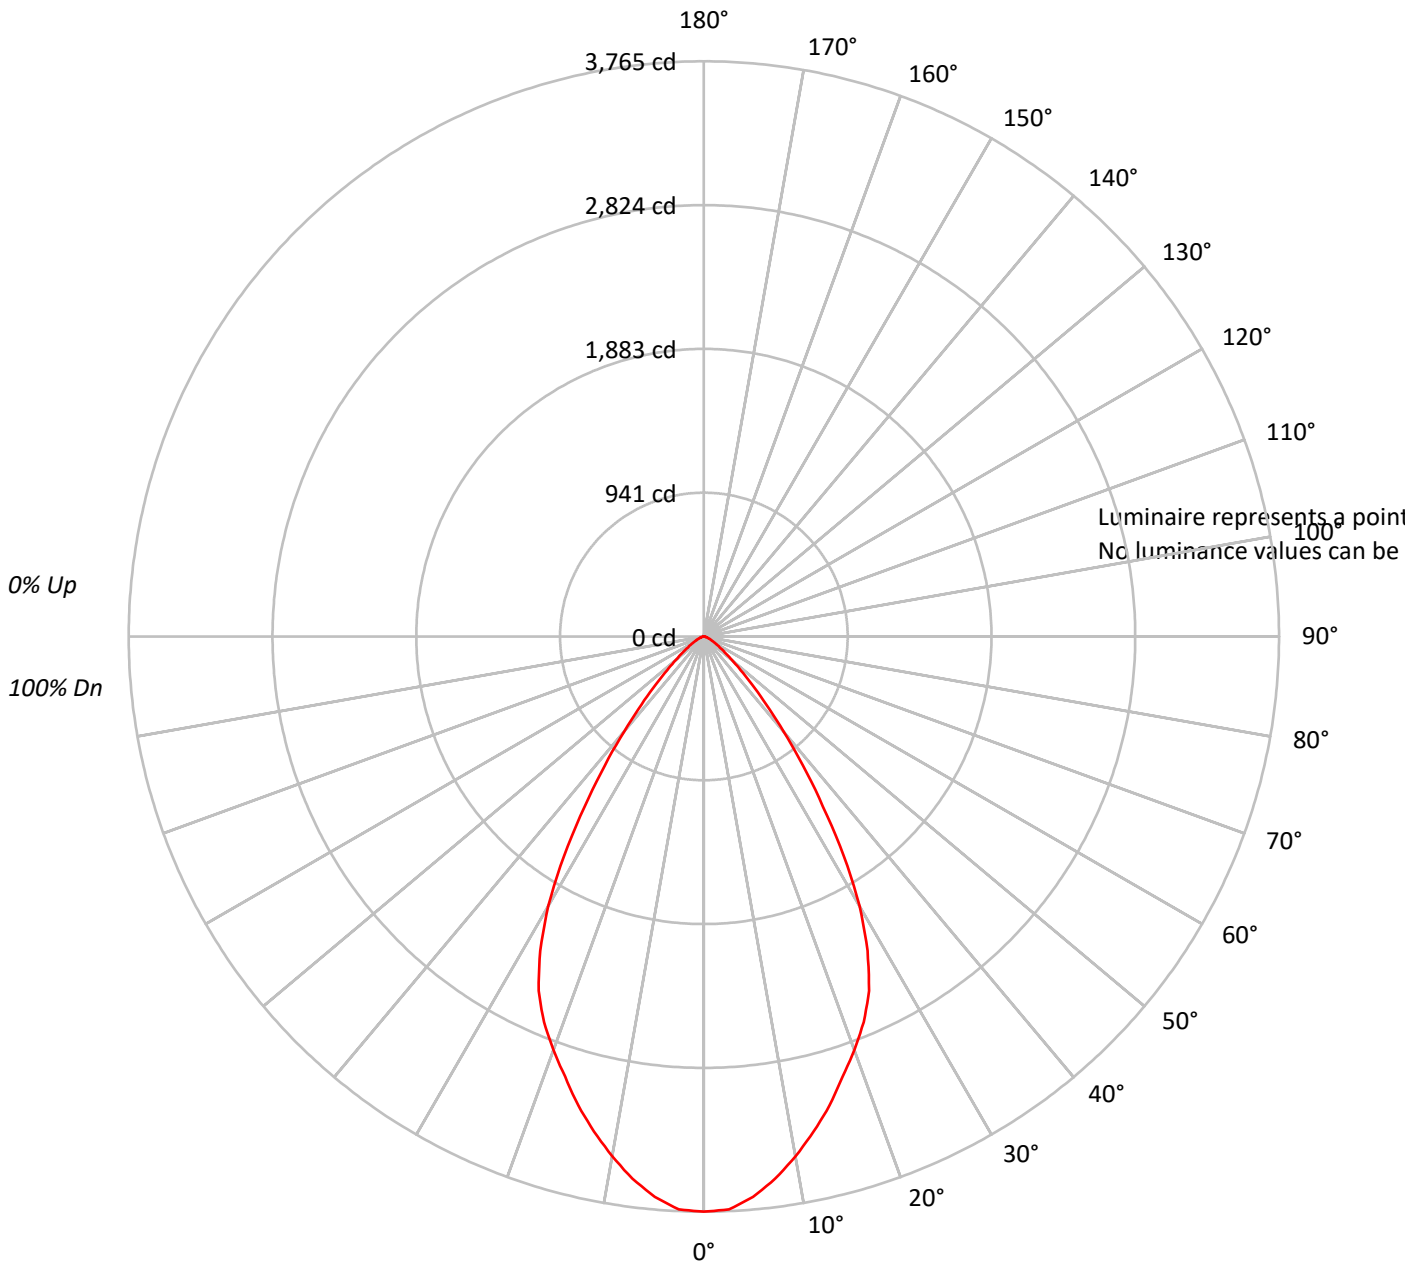



TEST NUMBER: P203297

CATALOG NUMBER: LD6B60D010TE EU6B60709050 6LBMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92			
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85			
3	101	94	88	84	99	92	87	84	90	86	82	87	84	81	85	82	80	78			
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72			
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66			
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53			
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49			
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203297

CATALOG NUMBER: LD6B60D010TE EU6B60709050 6LBMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	344.2	9.0
10°-20°	890.5	23.4
20°-30°	1153.9	30.3
30°-40°	856.7	22.5
40°-50°	361.6	9.5
50°-60°	128.4	3.4
60°-70°	49.6	1.3
70°-80°	17.2	0.5
80°-90°	2.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2388.7	62.8
0°-40°	3245.3	85.3
0°-60°	3735.4	98.2
0°-90°	3804.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3804.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3765	
5°	3683	344
15°	3178	891
25°	2559	1154
35°	1358	857
45°	446	362
55°	136	128
65°	49	50
75°	16	17
85°	0	2
90°	0	



TEST NUMBER: P203297

CATALOG NUMBER: LD6B60D010TE EU6B60709050 6LBMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3764.8
2.5°	3754.0
5°	3683.3
7.5°	3580.1
10°	3455.2
12.5°	3319.4
15°	3178.1
17.5°	3020.6
20°	2879.3
22.5°	2732.6
25°	2558.8
27.5°	2319.7
30°	2037.3
32.5°	1705.9
35°	1358.2
37.5°	1064.8
40°	809.5
42.5°	603.0
45°	445.5
47.5°	326.0
50°	239.0
52.5°	179.3
55°	135.8
57.5°	103.2
60°	81.5
62.5°	59.8
65°	48.9
67.5°	38.0
70°	27.2
72.5°	21.7
75°	16.3
77.5°	10.9
80°	5.4
82.5°	5.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)