

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205567

Luminaire Tested: **LD6B70D010TE EU6B60709027 6LBMGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205567  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B70D010TE EU6B60709027 6LBMGPH1  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3248.3 lumens  
Efficiency: N/A  
Efficacy: 40.9 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 79.45  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205567

CATALOG NUMBER: LD6B70D010TE EU6B60709027 6LBMGPH1

### Luminous Intensity Polar Plot

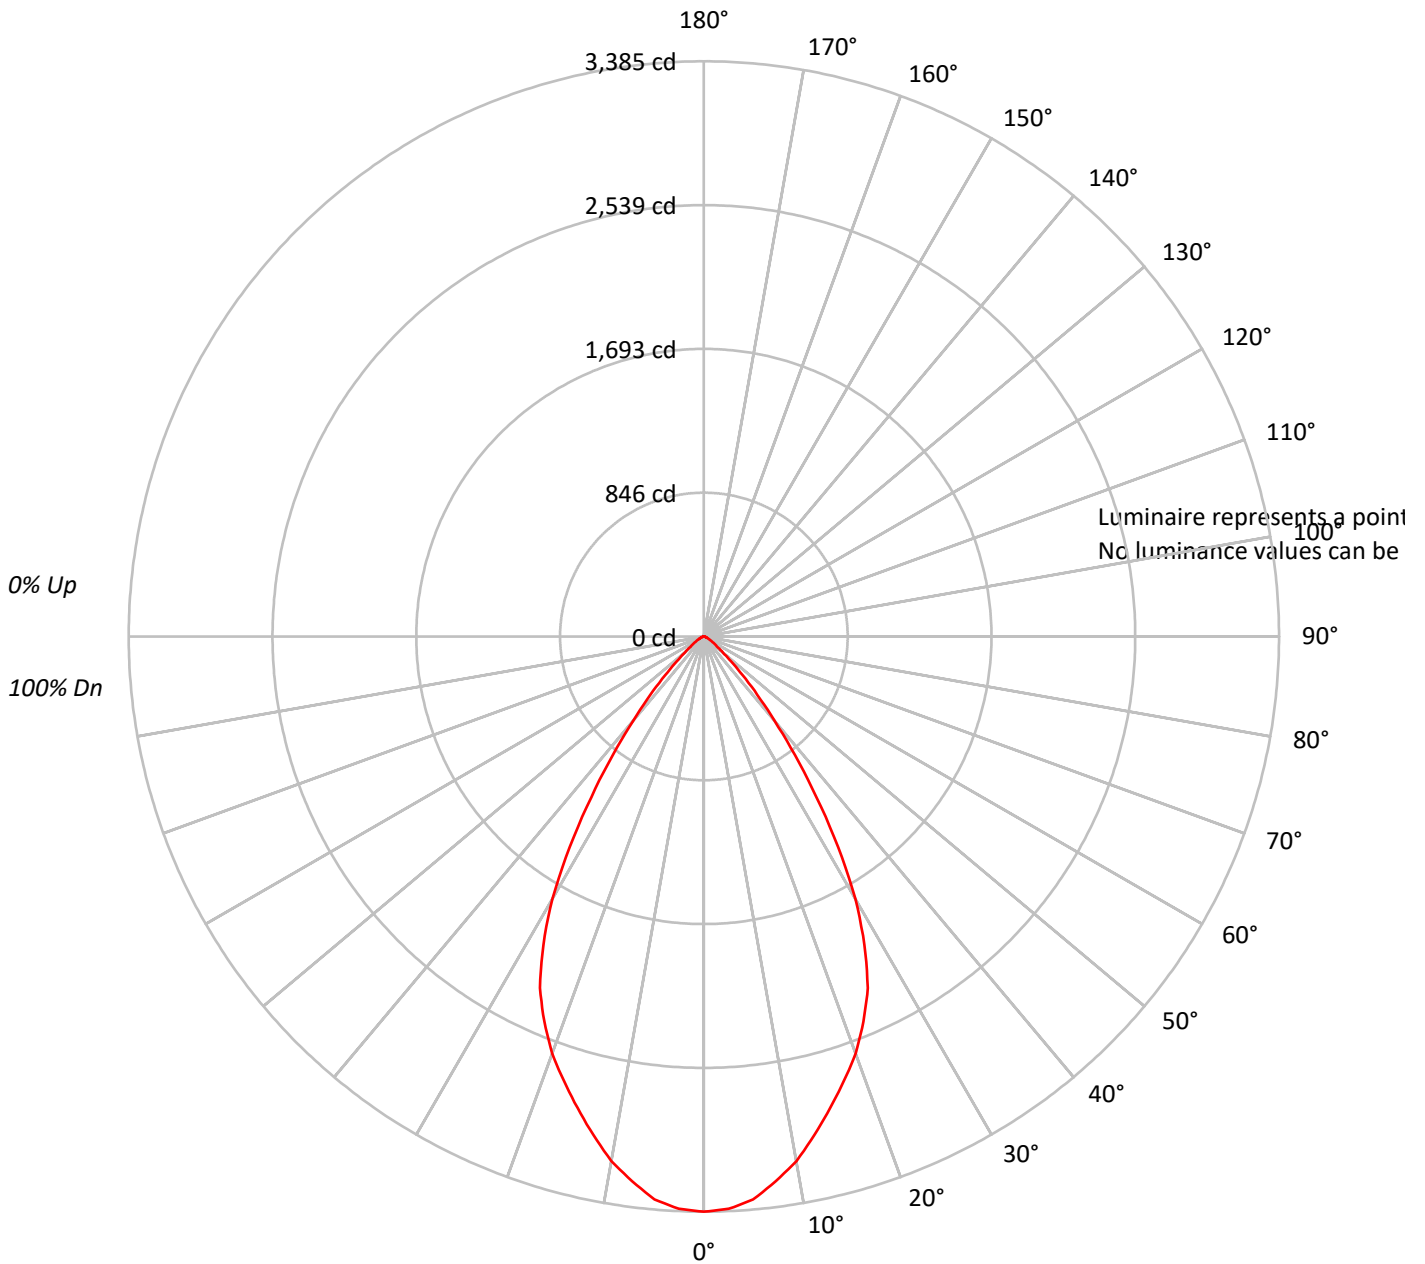



TEST NUMBER: P205567

CATALOG NUMBER: LD6B70D010TE EU6B60709027 6LBMGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93		
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86		
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79		
4	96	88	82	78	94	87	82	77	85	80	77	83	79	76	81	78	75	73		
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68		
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63		
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59		
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55		
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51		
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	53	49	48		

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205567

CATALOG NUMBER: LD6B70D010TE EU6B60709027 6LBMGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	310.9	9.6
10°-20°	806.9	24.8
20°-30°	1028.1	31.6
30°-40°	726.6	22.4
40°-50°	265.3	8.2
50°-60°	73.5	2.3
60°-70°	26.7	0.8
70°-80°	9.5	0.3
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2145.9	66.1
0°-40°	2872.4	88.4
0°-60°	3211.2	98.9
0°-90°	3248.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3248.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3385	
5°	3326	311
15°	2873	807
25°	2283	1028
35°	1154	727
45°	321	265
55°	79	74
65°	26	27
75°	7	10
85°	0	1
90°	0	



TEST NUMBER: P205567

CATALOG NUMBER: LD6B70D010TE EU6B60709027 6LBMGPH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3384.9
2.5°	3371.8
5°	3325.8
7.5°	3234.0
10°	3135.6
12.5°	3004.4
15°	2873.2
17.5°	2742.0
20°	2610.8
22.5°	2453.4
25°	2282.8
27.5°	2046.7
30°	1784.3
32.5°	1469.4
35°	1154.5
37.5°	879.0
40°	642.9
42.5°	465.8
45°	321.4
47.5°	216.5
50°	144.3
52.5°	98.4
55°	78.7
57.5°	59.0
60°	45.9
62.5°	32.8
65°	26.2
67.5°	19.7
70°	13.1
72.5°	13.1
75°	6.6
77.5°	6.6
80°	6.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)