

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203713

Luminaire Tested: **LD6B70D010TE EU6B60708030 6LBNH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203713  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B70D010TE EU6B60708030 6LBNH1  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4458.1 lumens  
Efficiency: N/A  
Efficacy: 56.1 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.84  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 79.45  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203713

CATALOG NUMBER: LD6B70D010TE EU6B60708030 6LBNH1

### Luminous Intensity Polar Plot

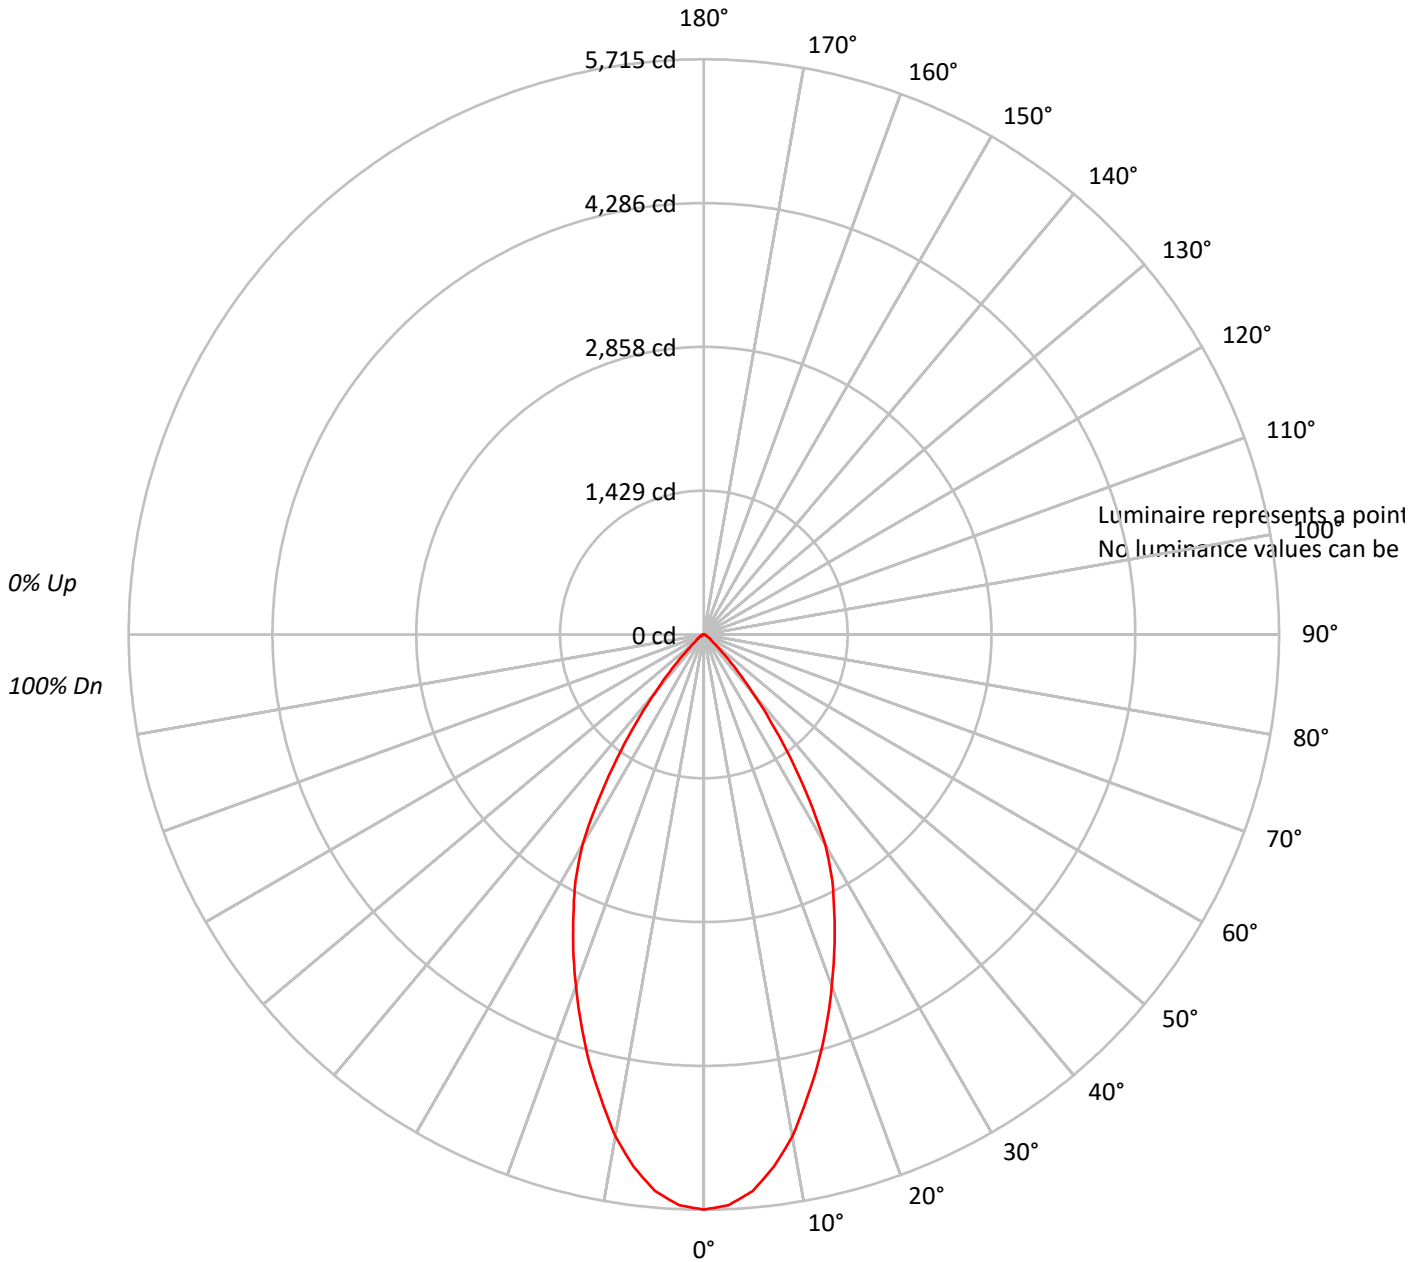



TEST NUMBER: P203713

CATALOG NUMBER: LD6B70D010TE EU6B60708030 6LBNH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93																												
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87																												
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81																												
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75																												
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70																												
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65																												
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61																												
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58																												
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54																												
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51																												

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203713

CATALOG NUMBER: LD6B70D010TE EU6B60708030 6LBNH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	513.9	11.5
10°-20°	1225.6	27.5
20°-30°	1404.0	31.5
30°-40°	943.3	21.2
40°-50°	269.5	6.0
50°-60°	65.9	1.5
60°-70°	25.1	0.6
70°-80°	9.6	0.2
80°-90°	1.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3143.5	70.5
0°-40°	4086.8	91.7
0°-60°	4422.3	99.2
0°-90°	4458.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4458.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5715	
5°	5552	514
15°	4398	1226
25°	3065	1404
35°	1504	943
45°	309	270
55°	73	66
65°	24	25
75°	8	10
85°	0	1
90°	0	



TEST NUMBER: P203713

CATALOG NUMBER: LD6B70D010TE EU6B60708030 6LBNH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5714.8
2.5°	5674.2
5°	5552.3
7.5°	5332.8
10°	5064.5
12.5°	4723.1
15°	4397.9
17.5°	4056.5
20°	3715.1
22.5°	3389.9
25°	3064.7
27.5°	2763.9
30°	2414.4
32.5°	1951.0
35°	1503.9
37.5°	1097.4
40°	756.0
42.5°	495.9
45°	308.9
47.5°	187.0
50°	113.8
52.5°	89.4
55°	73.2
57.5°	56.9
60°	40.6
62.5°	32.5
65°	24.4
67.5°	16.3
70°	16.3
72.5°	8.1
75°	8.1
77.5°	8.1
80°	8.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)