

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202787

Luminaire Tested: **LD6B70D010TE EU6B60708035 6LBWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202787
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B70D010TE EU6B60708035 6LBWH1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6429.6 lumens
Efficiency: N/A
Efficacy: 80.9 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 79.45
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202787

CATALOG NUMBER: LD6B70D010TE EU6B60708035 6LBWH1

Luminous Intensity Polar Plot

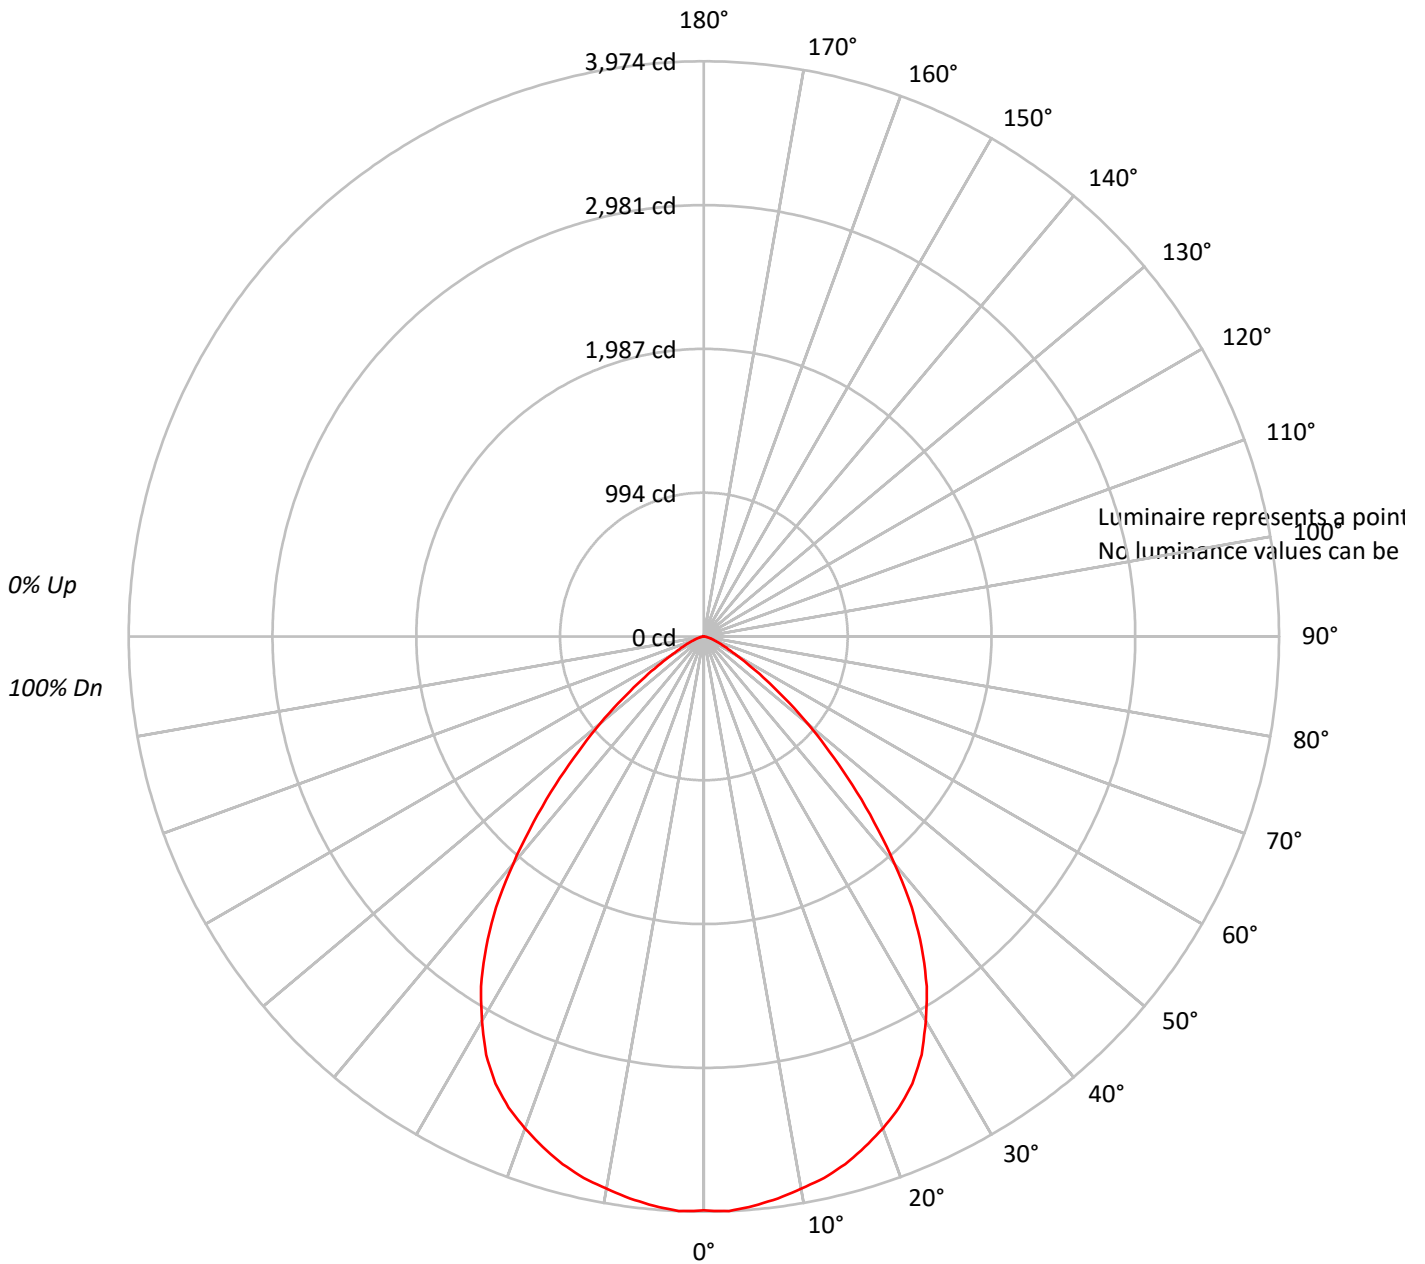



TEST NUMBER: P202787

CATALOG NUMBER: LD6B70D010TE EU6B60708035 6LBWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202787

CATALOG NUMBER: LD6B70D010TE EU6B60708035 6LBWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	374.6	5.8
10°-20°	1062.8	16.5
20°-30°	1558.3	24.2
30°-40°	1621.8	25.2
40°-50°	1122.1	17.5
50°-60°	488.5	7.6
60°-70°	149.8	2.3
70°-80°	44.9	0.7
80°-90°	6.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2995.7	46.6
0°-40°	4617.5	71.8
0°-60°	6228.1	96.9
0°-90°	6429.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6429.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3966	
5°	3949	375
15°	3774	1063
25°	3408	1558
35°	2624	1622
45°	1450	1122
55°	525	488
65°	142	150
75°	42	45
85°	8	7
90°	0	



TEST NUMBER: P202787

CATALOG NUMBER: LD6B70D010TE EU6B60708035 6LBWH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	3965.7
2.5°	3974.1
5°	3949.1
7.5°	3915.8
10°	3874.1
12.5°	3832.4
15°	3774.1
17.5°	3699.1
20°	3615.8
22.5°	3524.2
25°	3407.5
27.5°	3257.6
30°	3066.0
32.5°	2866.0
35°	2624.4
37.5°	2357.8
40°	2049.5
42.5°	1741.3
45°	1449.7
47.5°	1174.7
50°	933.1
52.5°	708.2
55°	524.9
57.5°	374.9
60°	258.3
62.5°	191.6
65°	141.6
67.5°	108.3
70°	75.0
72.5°	58.3
75°	41.7
77.5°	25.0
80°	16.7
82.5°	8.3
85°	8.3
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)