

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P252851

Luminaire Tested: **LD6B70D010TE EU6B60709035 6LBBA1MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P252851
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1712-453-2)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B70D010TE EU6B60709035 6LBBA1MW
Description: PORTFOLIO 6 INCH BAFFLE RECESSED DOWNLIGHT, WITH MATTE WHITE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7811.0 lumens
Efficiency: N/A
Efficacy: 98.3 lumens/watt
Spacing Criteria (0/90/45): 1.03 / 1.03 / 1
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 79.45
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P252851

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBBA1MW

Luminous Intensity Polar Plot

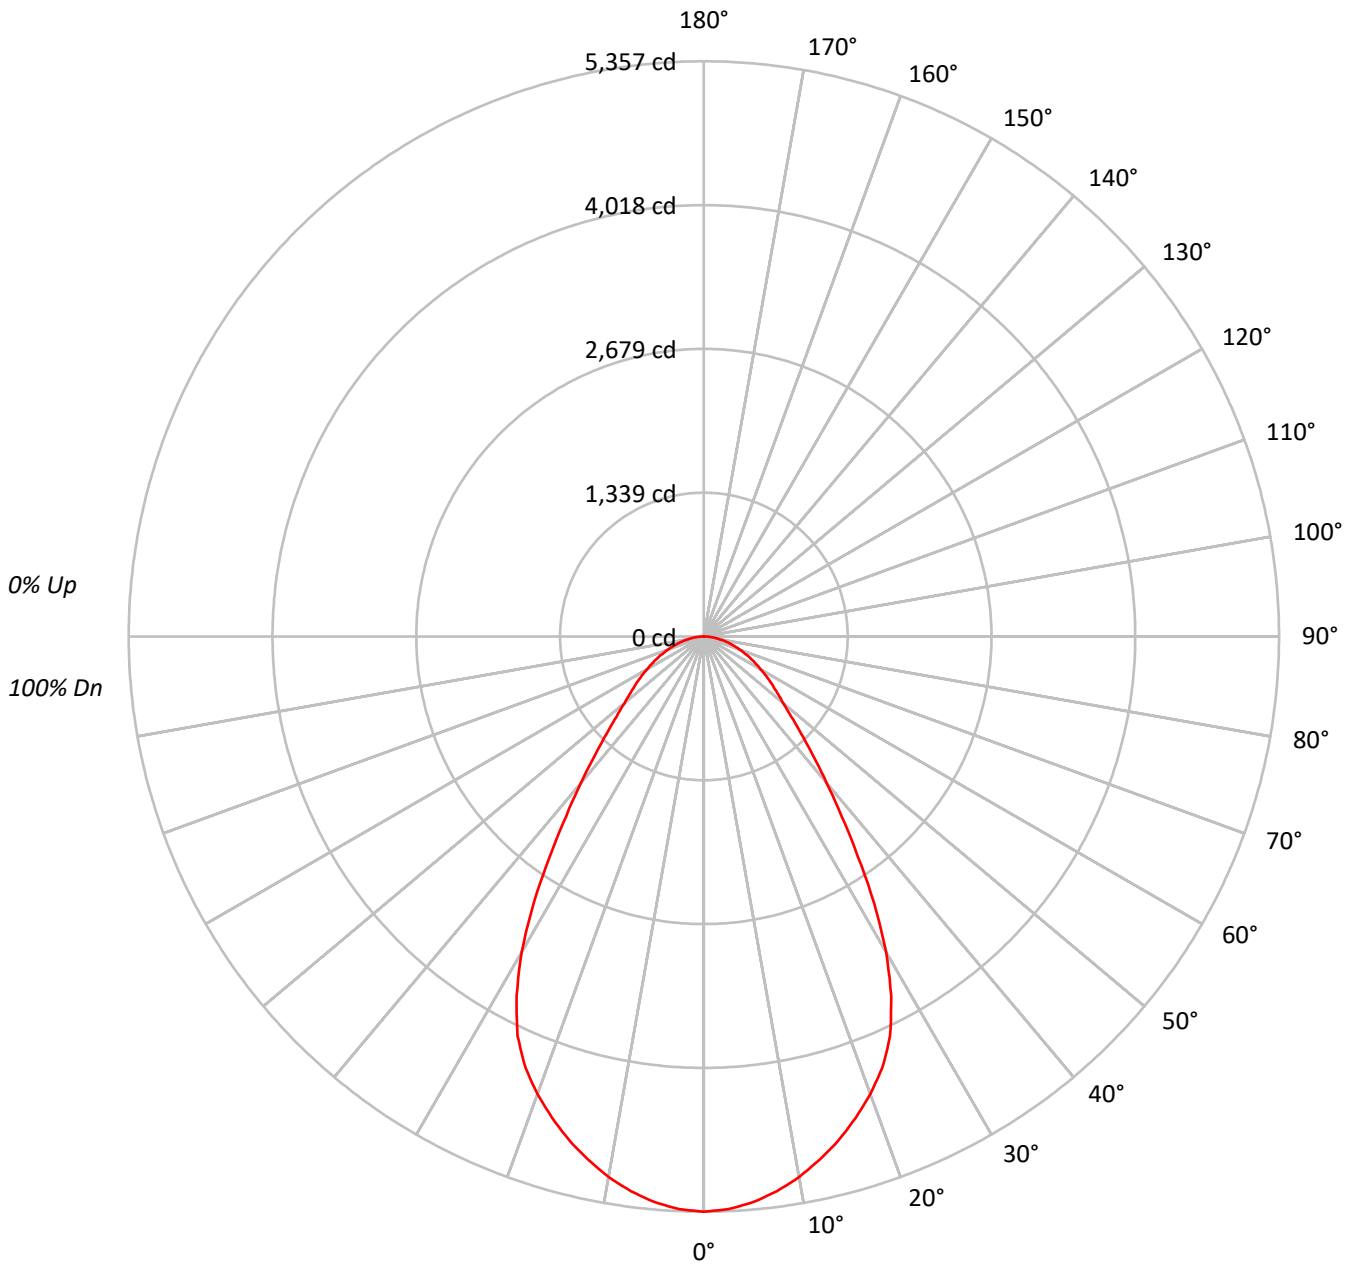



TEST NUMBER: P252851

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBBA1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	88			
2	103	97	91	87	101	95	90	86	91	87	84	88	85	82	85	83	80	78			
3	96	87	81	76	94	86	80	75	83	78	74	81	76	72	78	74	71	69			
4	90	80	72	67	87	78	72	66	76	70	66	74	69	65	72	68	64	62			
5	84	73	65	60	82	72	65	60	70	64	59	68	63	58	66	62	58	56			
6	78	67	60	54	77	66	59	54	65	58	54	63	57	53	62	57	53	51			
7	74	62	55	49	72	61	54	49	60	53	49	59	53	49	57	52	48	47			
8	69	58	50	45	68	57	50	45	56	49	45	55	49	45	53	48	44	43			
9	65	54	46	42	64	53	46	42	52	46	41	51	45	41	50	45	41	39			
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	37			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	349520
5°	346310
10°	338682
15°	327930
20°	314688
25°	295412
30°	255629
35°	199031
40°	151280
45°	117923
50°	97812
55°	87787
60°	79920
65°	73759
70°	67774
75°	62791
80°	56769
85°	51950



TEST NUMBER: P252851

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBBA1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	499.1	6.4
10°-20°	1364.2	17.5
20°-30°	1857.9	23.8
30°-40°	1572.1	20.1
40°-50°	1008.5	12.9
50°-60°	694.0	8.9
60°-70°	474.1	6.1
70°-80°	263.8	3.4
80°-90°	77.2	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3721.2	47.6
0°-40°	5293.3	67.8
0°-60°	6995.9	89.6
0°-90°	7811.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7811.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5357	
5°	5288	499
15°	4855	1364
25°	4104	1858
35°	2499	1572
45°	1278	1009
55°	772	694
65°	478	474
75°	249	264
85°	69	77
90°	0	



TEST NUMBER: P252851

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBB1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	5357.4
2.5°	5337.0
5°	5288.0
7.5°	5210.4
10°	5112.4
12.5°	4989.9
15°	4855.2
17.5°	4700.0
20°	4532.6
22.5°	4344.7
25°	4103.8
27.5°	3777.1
30°	3393.3
32.5°	2952.3
35°	2499.0
37.5°	2102.9
40°	1776.3
42.5°	1502.7
45°	1278.1
47.5°	1102.5
50°	963.7
52.5°	857.5
55°	771.8
57.5°	690.1
60°	612.5
62.5°	543.1
65°	477.8
67.5°	412.4
70°	355.3
72.5°	298.1
75°	249.1
77.5°	200.1
80°	151.1
82.5°	110.3
85°	69.4
87.5°	28.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)