

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205161

Luminaire Tested: **LD6B70D010TE EU6B60709035 6LBMLI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205161  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B70D010TE EU6B60709035 6LBMLI1  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
MEDIUM DISTRIBUTION WITH SPECULAR CLEAR TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5493.9 lumens  
Efficiency: N/A  
Efficacy: 69.1 lumens/watt  
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 79.45  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205161

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBMLI1

### Luminous Intensity Polar Plot

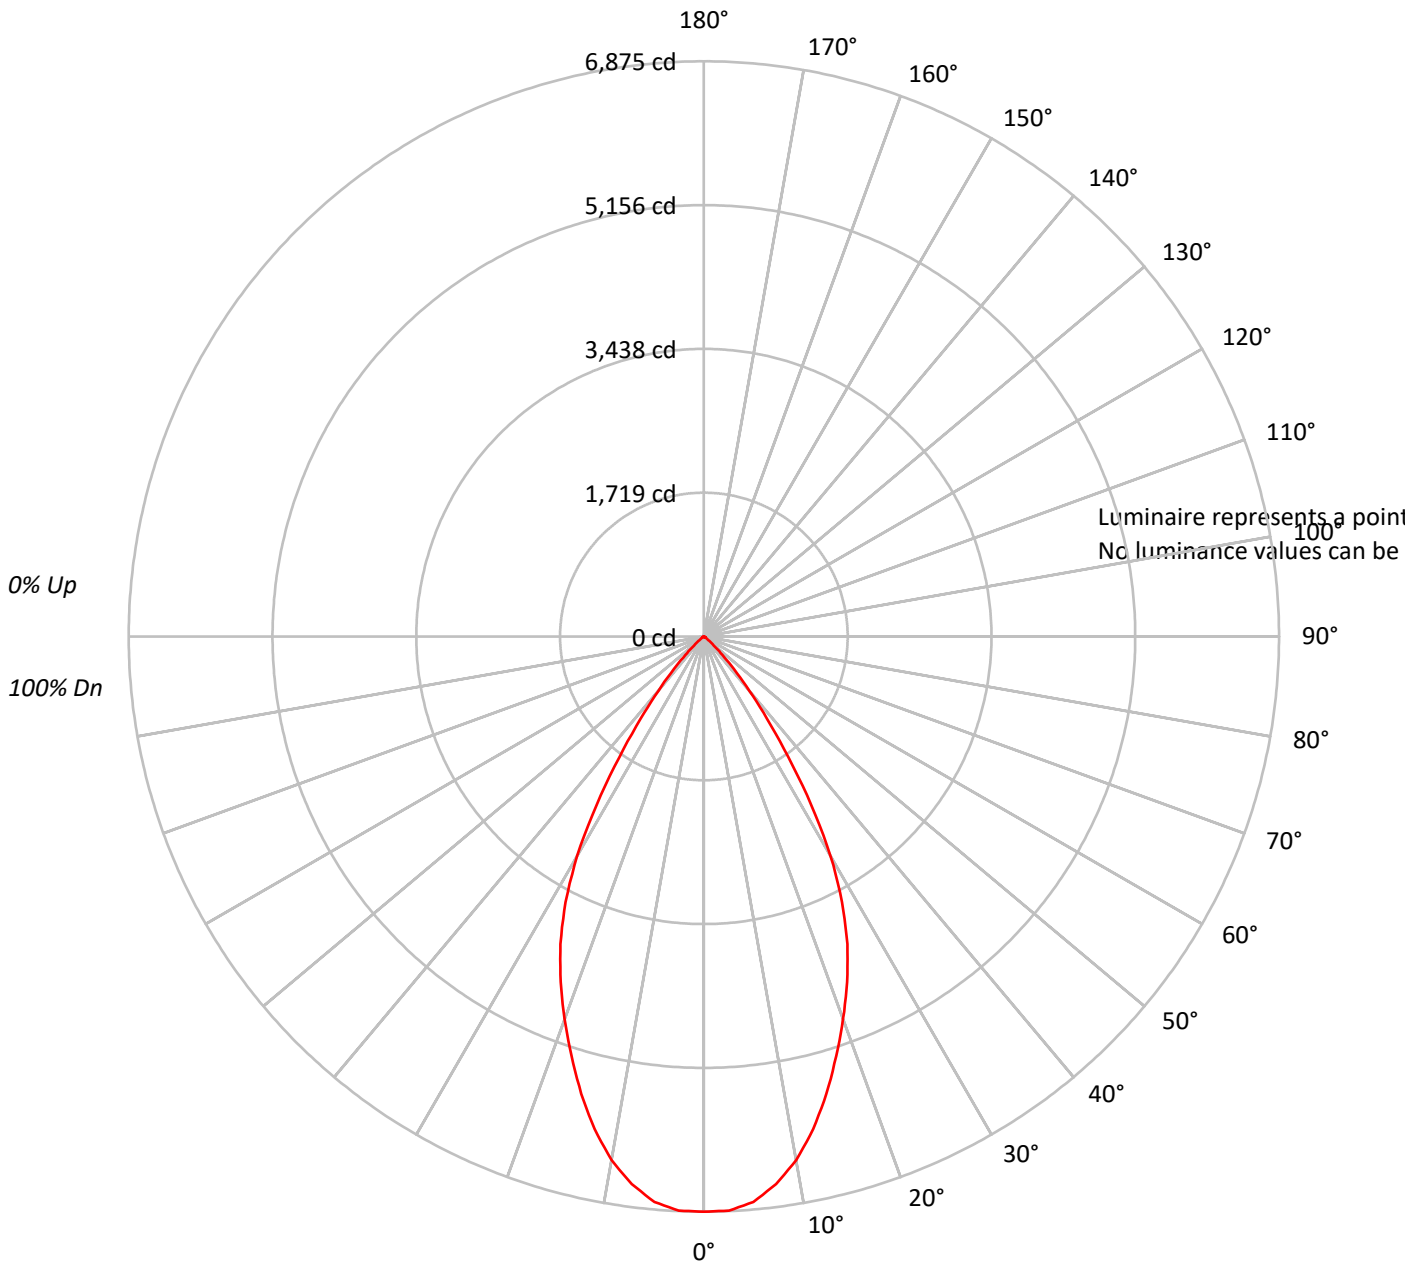



TEST NUMBER: P205161

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBMLI1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 114 | 111 | 109 | 106 | 111 | 109 | 107 | 105 | 105 | 103 | 101 | 101 | 100 | 98  | 98  | 97  | 96  | 94  |    |    |   |
| 2   | 108 | 103 | 100 | 96  | 106 | 102 | 98  | 95  | 99  | 96  | 93  | 96  | 93  | 91  | 93  | 91  | 89  | 88  |    |    |   |
| 3   | 103 | 97  | 92  | 88  | 101 | 95  | 91  | 87  | 93  | 89  | 86  | 90  | 87  | 85  | 88  | 85  | 83  | 82  |    |    |   |
| 4   | 98  | 91  | 85  | 81  | 96  | 89  | 84  | 81  | 87  | 83  | 80  | 85  | 82  | 79  | 83  | 80  | 78  | 76  |    |    |   |
| 5   | 93  | 85  | 79  | 75  | 91  | 84  | 79  | 75  | 82  | 78  | 74  | 81  | 77  | 73  | 79  | 76  | 73  | 71  |    |    |   |
| 6   | 89  | 80  | 74  | 70  | 87  | 79  | 74  | 70  | 78  | 73  | 69  | 76  | 72  | 69  | 75  | 71  | 68  | 67  |    |    |   |
| 7   | 84  | 75  | 69  | 65  | 83  | 75  | 69  | 65  | 73  | 68  | 65  | 72  | 68  | 64  | 71  | 67  | 64  | 63  |    |    |   |
| 8   | 80  | 71  | 65  | 61  | 79  | 70  | 65  | 61  | 69  | 64  | 61  | 68  | 64  | 60  | 67  | 63  | 60  | 59  |    |    |   |
| 9   | 77  | 67  | 61  | 57  | 75  | 67  | 61  | 57  | 66  | 61  | 57  | 65  | 60  | 57  | 64  | 60  | 57  | 55  |    |    |   |
| 10  | 73  | 64  | 58  | 54  | 72  | 63  | 58  | 54  | 62  | 57  | 54  | 62  | 57  | 54  | 61  | 57  | 54  | 52  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205161

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBMLI1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 633.4  | 11.5      |
| 10°-20°   | 1576.9 | 28.7      |
| 20°-30°   | 1833.0 | 33.4      |
| 30°-40°   | 1122.5 | 20.4      |
| 40°-50°   | 278.8  | 5.1       |
| 50°-60°   | 32.6   | 0.6       |
| 60°-70°   | 12.1   | 0.2       |
| 70°-80°   | 4.6    | 0.1       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 4043.3 | 73.6      |
| 0°-40°    | 5165.8 | 94.0      |
| 0°-60°    | 5477.1 | 99.7      |
| 0°-90°    | 5493.9 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 5493.9 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 6875 |      |
| 5°  | 6784 | 633  |
| 15° | 5659 | 1577 |
| 25° | 4056 | 1833 |
| 35° | 1758 | 1123 |
| 45° | 309  | 279  |
| 55° | 28   | 33   |
| 65° | 14   | 12   |
| 75° | 7    | 5    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P205161

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBMLI1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 6875.3 |
| 2.5°  | 6868.3 |
| 5°    | 6784.0 |
| 7.5°  | 6601.2 |
| 10°   | 6355.1 |
| 12.5° | 6031.7 |
| 15°   | 5659.2 |
| 17.5° | 5258.4 |
| 20°   | 4864.8 |
| 22.5° | 4471.1 |
| 25°   | 4056.3 |
| 27.5° | 3578.3 |
| 30°   | 3029.9 |
| 32.5° | 2390.2 |
| 35°   | 1757.5 |
| 37.5° | 1237.3 |
| 40°   | 843.6  |
| 42.5° | 527.3  |
| 45°   | 309.3  |
| 47.5° | 175.8  |
| 50°   | 91.4   |
| 52.5° | 42.2   |
| 55°   | 28.1   |
| 57.5° | 21.1   |
| 60°   | 21.1   |
| 62.5° | 14.1   |
| 65°   | 14.1   |
| 67.5° | 7.0    |
| 70°   | 7.0    |
| 72.5° | 7.0    |
| 75°   | 7.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)