

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203720

Luminaire Tested: **LD6B70D010TE EU6B60709035 6LBNH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203720
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B70D010TE EU6B60709035 6LBNH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3861.9 lumens
Efficiency: N/A
Efficacy: 48.6 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.84
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 79.45
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203720

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBNH1

Luminous Intensity Polar Plot

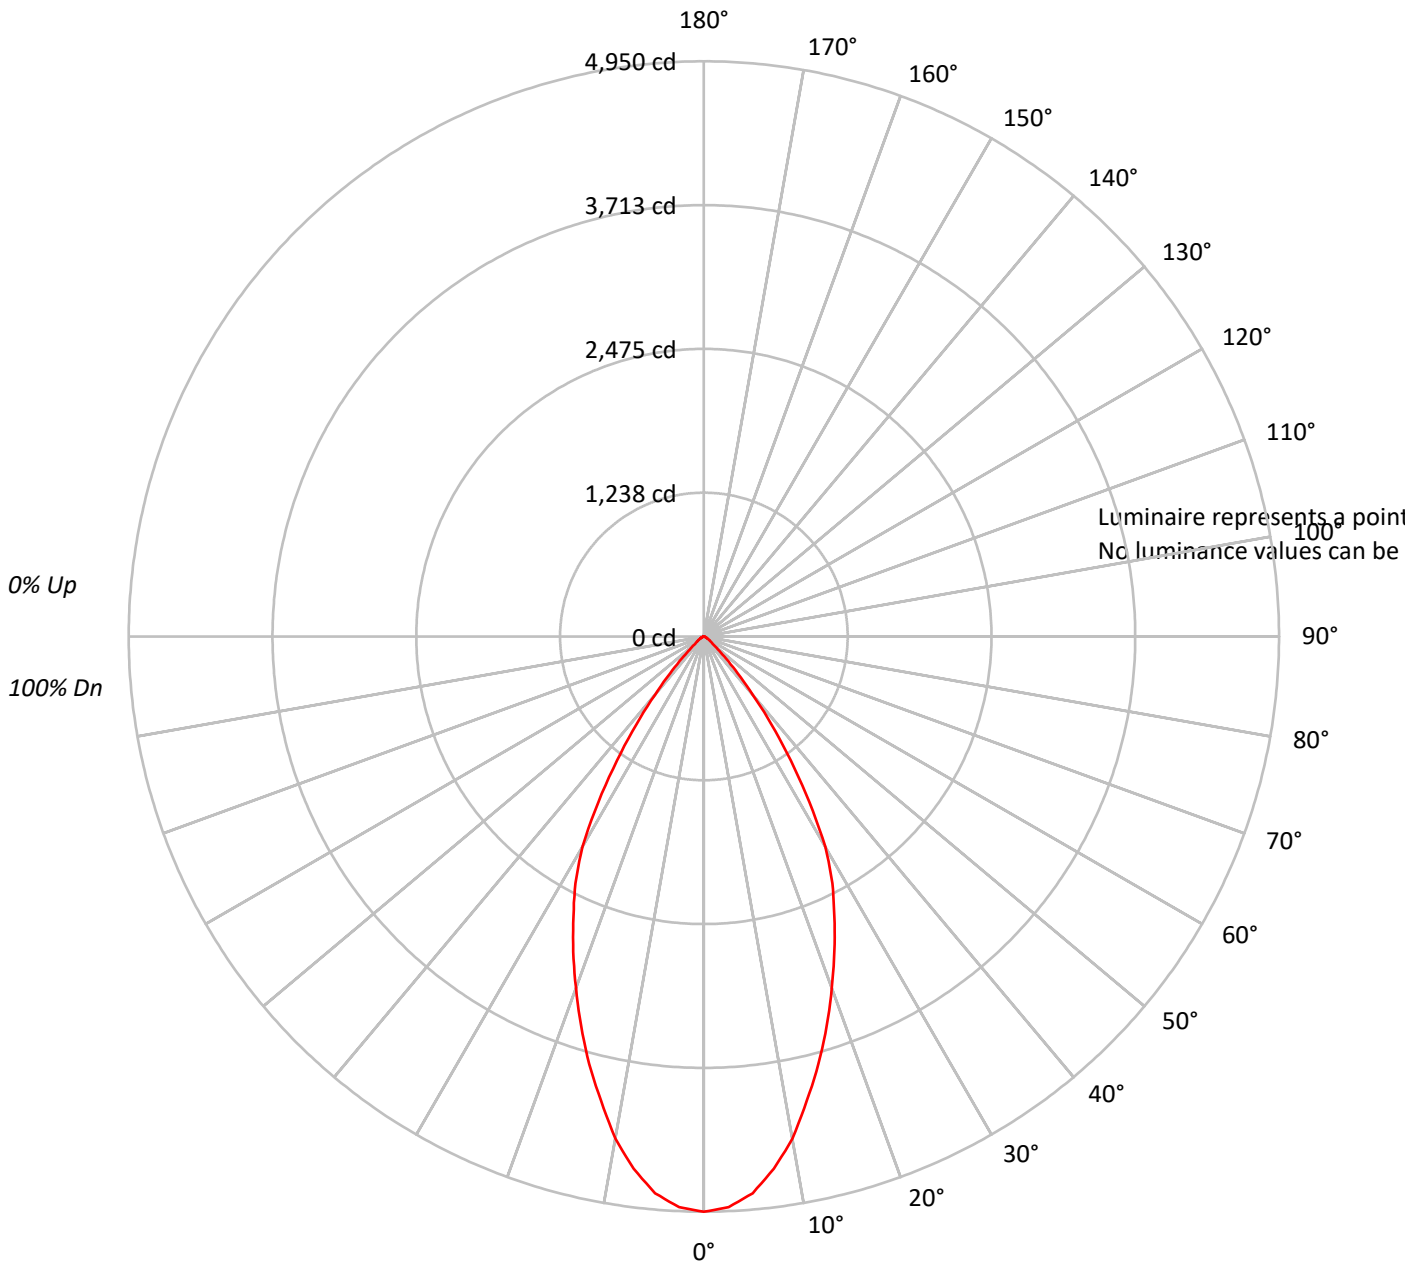



TEST NUMBER: P203720

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBNH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87		
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81		
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75		
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70		
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65		
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61		
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58		
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54		
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203720

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBNH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	445.2	11.5
10°-20°	1061.6	27.5
20°-30°	1216.2	31.5
30°-40°	817.2	21.2
40°-50°	233.5	6.0
50°-60°	57.1	1.5
60°-70°	21.7	0.6
70°-80°	8.3	0.2
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2723.1	70.5
0°-40°	3540.3	91.7
0°-60°	3830.9	99.2
0°-90°	3861.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3861.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4950	
5°	4810	445
15°	3810	1062
25°	2655	1216
35°	1303	817
45°	268	233
55°	63	57
65°	21	22
75°	7	8
85°	0	1
90°	0	



TEST NUMBER: P203720

CATALOG NUMBER: LD6B70D010TE EU6B60709035 6LBNH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	4950.5
2.5°	4915.3
5°	4809.7
7.5°	4619.6
10°	4387.2
12.5°	4091.4
15°	3809.7
17.5°	3514.0
20°	3218.2
22.5°	2936.5
25°	2654.8
27.5°	2394.3
30°	2091.5
32.5°	1690.1
35°	1302.8
37.5°	950.7
40°	654.9
42.5°	429.6
45°	267.6
47.5°	162.0
50°	98.6
52.5°	77.5
55°	63.4
57.5°	49.3
60°	35.2
62.5°	28.2
65°	21.1
67.5°	14.1
70°	14.1
72.5°	7.0
75°	7.0
77.5°	7.0
80°	7.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)