

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P232487

Luminaire Tested: **LD6B15D010 EU6B10209030D2W 6LBW0LI**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P232487  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27695)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B15D010 EU6B10209030D2W 6LBW0LI  
Description: 6" WIDE D2W Dimmed to 3000K, with specular clear trim  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1389.4 lumens  
Efficiency: N/A  
Efficacy: 96.6 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.07  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.39  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P232487

CATALOG NUMBER: LD6B15D010 EU6B10209030D2W 6LBW0LI

### Luminous Intensity Polar Plot

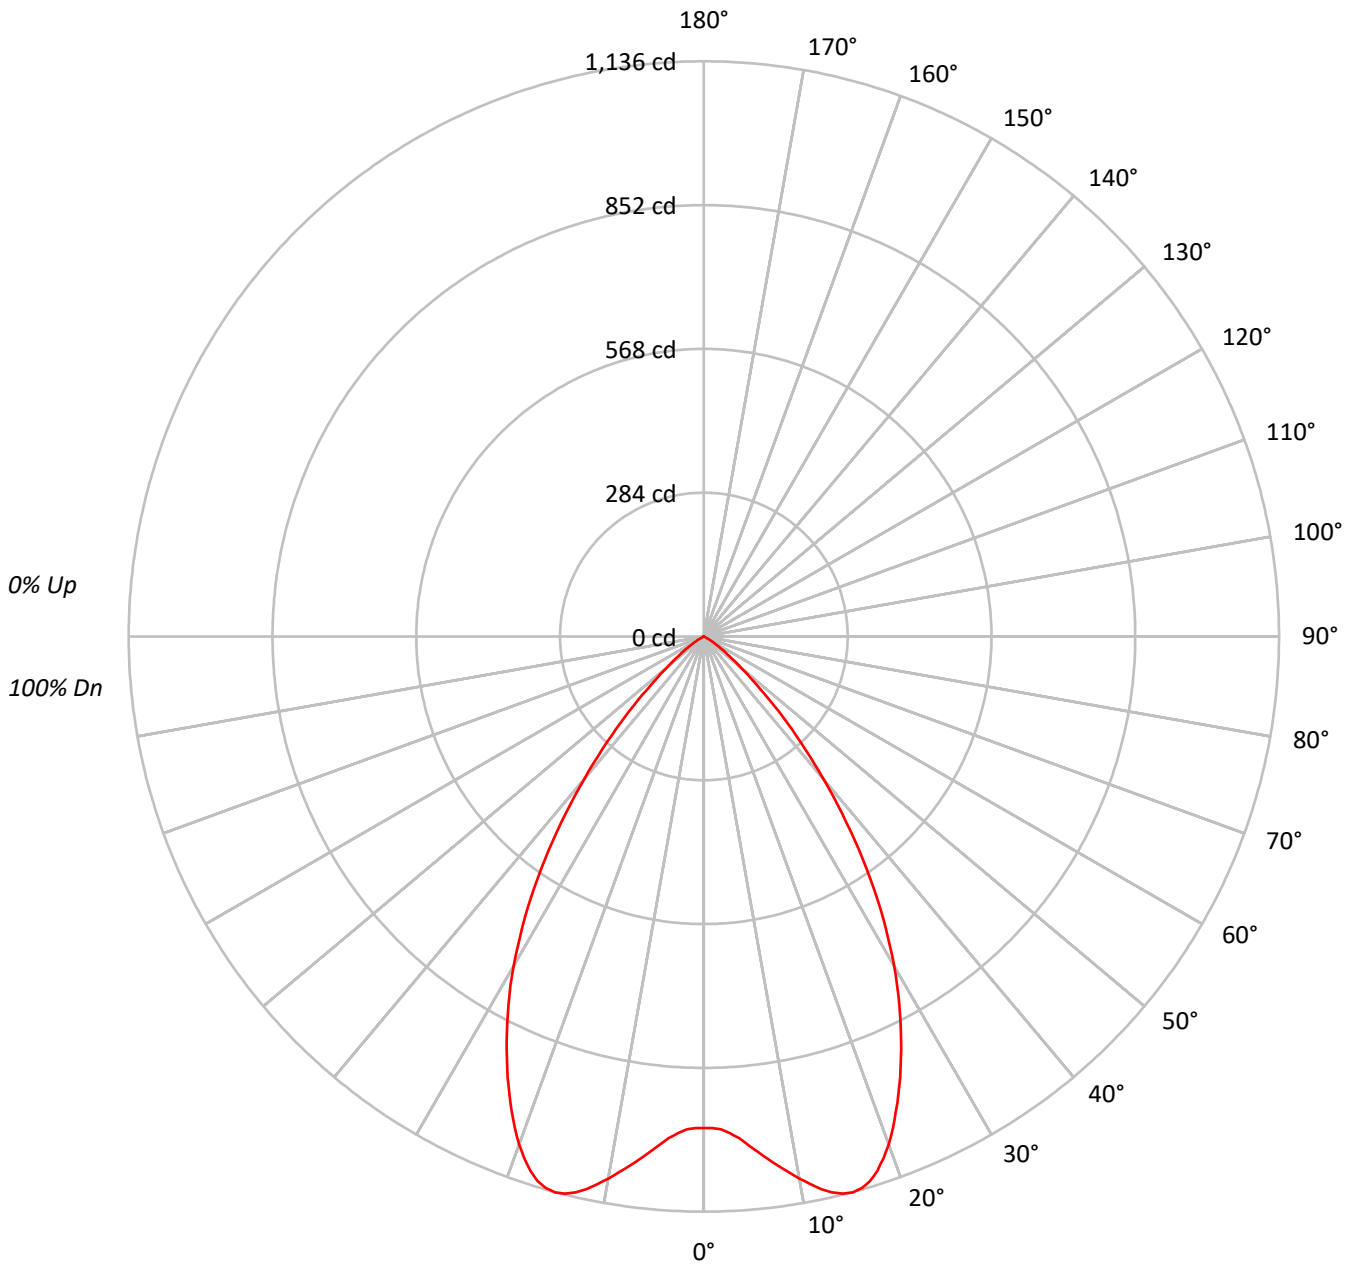



TEST NUMBER: P232487

CATALOG NUMBER: LD6B15D010 EU6B10209030D2W 6LBW0LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85			85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78
4	95	87	81	76	93	86	80	76	83	79	75	81	77	74	80	76	73	71			71
5	90	81	74	69	88	80	74	69	78	72	68	76	71	68	74	70	67	66			66
6	85	75	68	64	83	74	68	63	72	67	63	71	66	62	70	65	62	60			60
7	80	70	63	59	78	69	63	58	68	62	58	66	61	58	65	61	57	56			56
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52			52
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	58	53	49	48			48
10	68	57	51	47	67	57	51	47	56	50	46	55	50	46	54	49	46	45			45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	53230
5°	55475
10°	60514
15°	64501
20°	62270
25°	55697
30°	47545
35°	37477
40°	26285
45°	16157
50°	8145
55°	3775
60°	1447
65°	104
70°	128
75°	0
80°	0
85°	0



TEST NUMBER: P232487

CATALOG NUMBER: LD6B15D010 EU6B10209030D2W 6LBW0LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	98.9	7.1
10°-20°	315.8	22.7
20°-30°	420.0	30.2
30°-40°	346.9	25.0
40°-50°	164.0	11.8
50°-60°	39.9	2.9
60°-70°	3.7	0.3
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	834.8	60.1
0°-40°	1181.7	85.0
0°-60°	1385.6	99.7
0°-90°	1389.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1389.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	971	
5°	1008	99
15°	1136	316
25°	921	420
35°	560	347
45°	208	164
55°	40	40
65°	1	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P232487

CATALOG NUMBER: LD6B15D010 EU6B10209030D2W 6LBW0LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	971.0
1°	971.0
2°	974.3
3°	982.5
4°	993.2
5°	1008.1
6°	1023.7
7°	1040.2
8°	1055.8
9°	1071.5
10°	1087.1
11°	1101.9
12°	1115.9
13°	1126.7
14°	1134.1
15°	1136.5
16°	1133.2
17°	1124.2
18°	1109.4
19°	1089.6
20°	1067.4
21°	1041.0
22°	1012.2
23°	983.3
24°	952.9
25°	920.8
26°	888.6
27°	855.7
28°	821.9
29°	787.3
30°	751.1
32.5°	658.0
35°	560.0
37.5°	462.0
40°	367.3
42.5°	282.5
45°	208.4
47.5°	140.0
50°	95.5
52.5°	63.4
55°	39.5
57.5°	23.9
60°	13.2



TEST NUMBER: P232487

CATALOG NUMBER: LD6B15D010 EU6B10209030D2W 6LBW0LI

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.8
70°	0.8
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







62.5°	6.6
65°	0.8



(END OF REPORT)