

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P274420

Luminaire Tested: **LD6B20DE010W2N2050 EU6B1020W2N902050 6LBS0H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P274420
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35136)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B20DE010W2N2050 EU6B1020W2N902050 6LBS0H
Description: PORTFOLIO 6" W2N RN DOWNLIGHT, SHALLOW WITH HAZE FINISH
Light Source: W2N 2000K-5000K CCT TUNING RANGE
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1580.9 lumens
Efficiency: N/A
Efficacy: 56.5 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P274420

CATALOG NUMBER: LD6B20DE010W2N2050 EU6B1020W2N902050 6LBS0H

Luminous Intensity Polar Plot

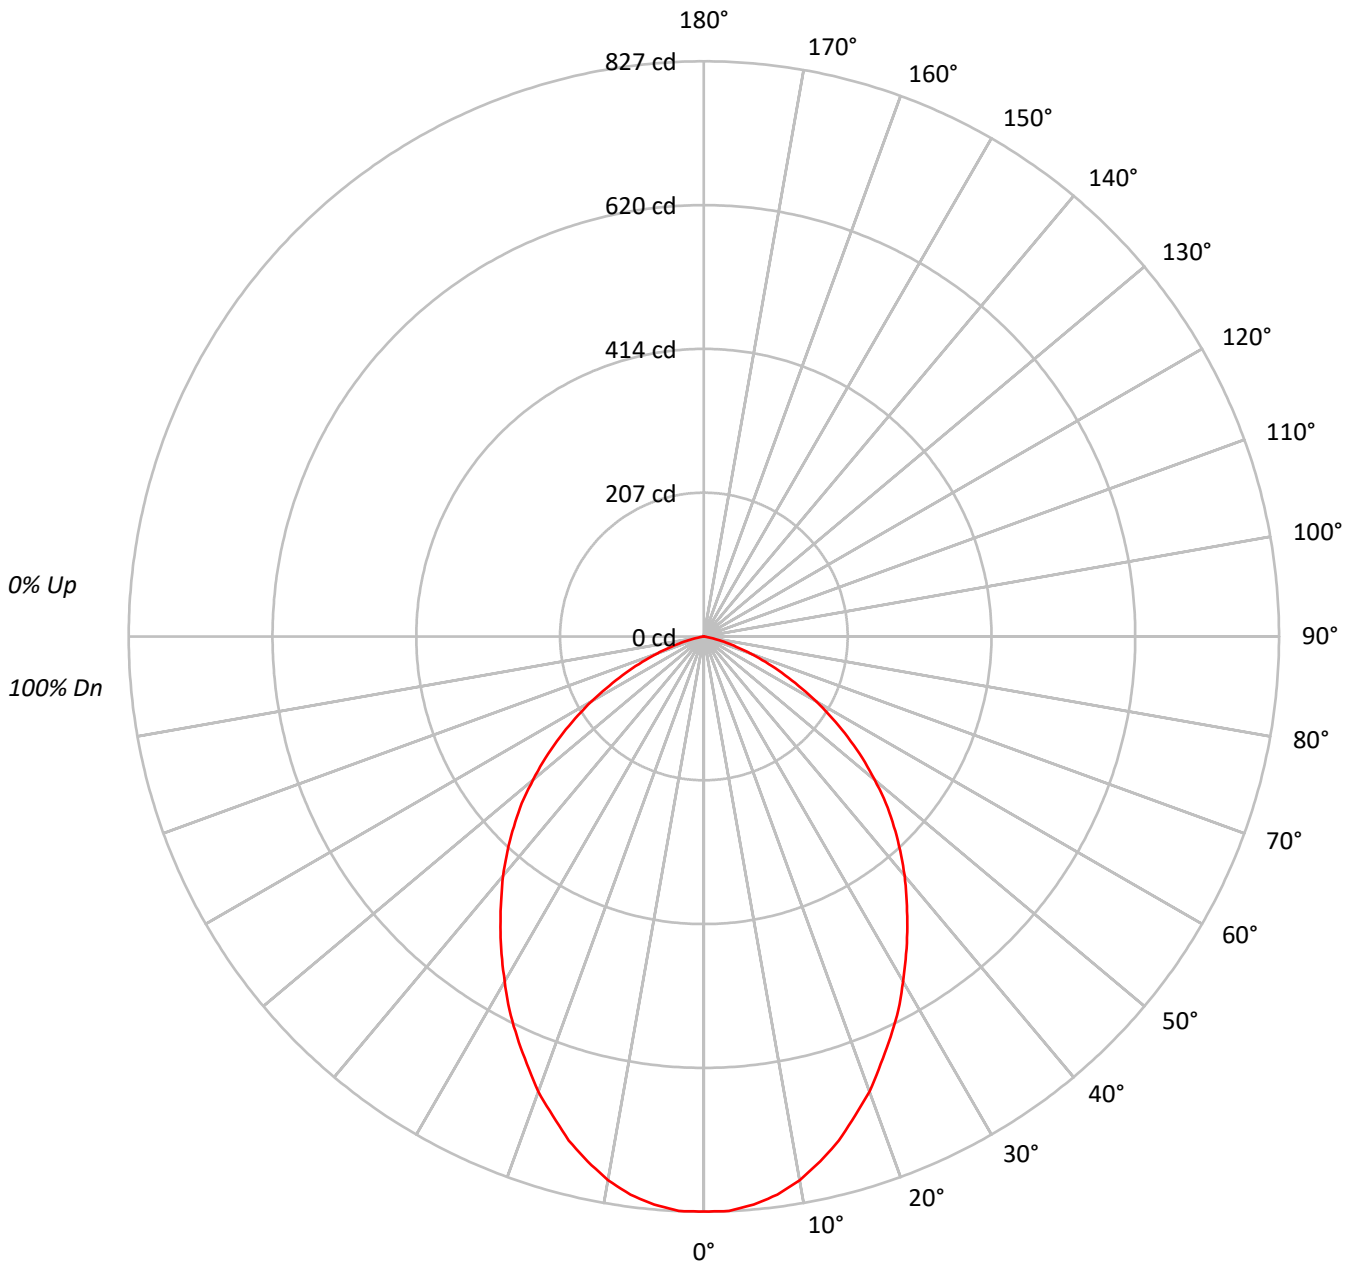



TEST NUMBER: P274420

CATALOG NUMBER: LD6B20DE010W2N2050 EU6B1020W2N902050 6LBS0H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	53941
5°	53689
10°	52580
15°	50670
20°	48342
25°	45732
30°	43143
35°	40618
40°	38248
45°	35651
50°	32509
55°	28709
60°	24296
65°	19080
70°	13620
75°	7461
80°	1315
85°	0



TEST NUMBER: P274420

CATALOG NUMBER: LD6B20DE010W2N2050 EU6B1020W2N902050 6LBS0H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.4	4.9
10°-20°	210.5	13.3
20°-30°	292.3	18.5
30°-40°	319.0	20.2
40°-50°	297.6	18.8
50°-60°	225.9	14.3
60°-70°	123.7	7.8
70°-80°	34.0	2.2
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	580.3	36.7
0°-40°	899.3	56.9
0°-60°	1422.7	90.0
0°-90°	1580.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1580.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	827	
5°	820	77
15°	750	210
25°	635	292
35°	510	319
45°	386	298
55°	252	226
65°	124	124
75°	30	34
85°	0	0
90°	0	



TEST NUMBER: P274420

CATALOG NUMBER: LD6B20DE010W2N2050 EU6B1020W2N902050 6LBS0H

CANDELA DISTRIBUTION (FULL):

0°	
0°	826.8
2.5°	826.8
5°	819.8
7.5°	809.4
10°	793.7
12.5°	772.8
15°	750.2
17.5°	722.4
20°	696.3
22.5°	664.9
25°	635.3
27.5°	605.7
30°	572.7
32.5°	541.3
35°	510.0
37.5°	478.7
40°	449.1
42.5°	417.8
45°	386.4
47.5°	355.1
50°	320.3
52.5°	287.2
55°	252.4
57.5°	219.3
60°	186.2
62.5°	153.2
65°	123.6
67.5°	95.7
70°	71.4
72.5°	48.7
75°	29.6
77.5°	13.9
80°	3.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)