

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P683899

Luminaire Tested: **LX6C10D010 EX6C109035 6LBMDH**

Issue Date: 2/15/2022

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P683899
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-21)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C10D010 EX6C109035 6LBMDH
Description: 6 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS
AND 6LRMD45 TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 755.0 lumens
Efficiency: N/A
Efficacy: 77.0 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.8
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 9.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P683899

CATALOG NUMBER: LX6C10D010 EX6C109035 6LBMDH

Luminous Intensity Polar Plot

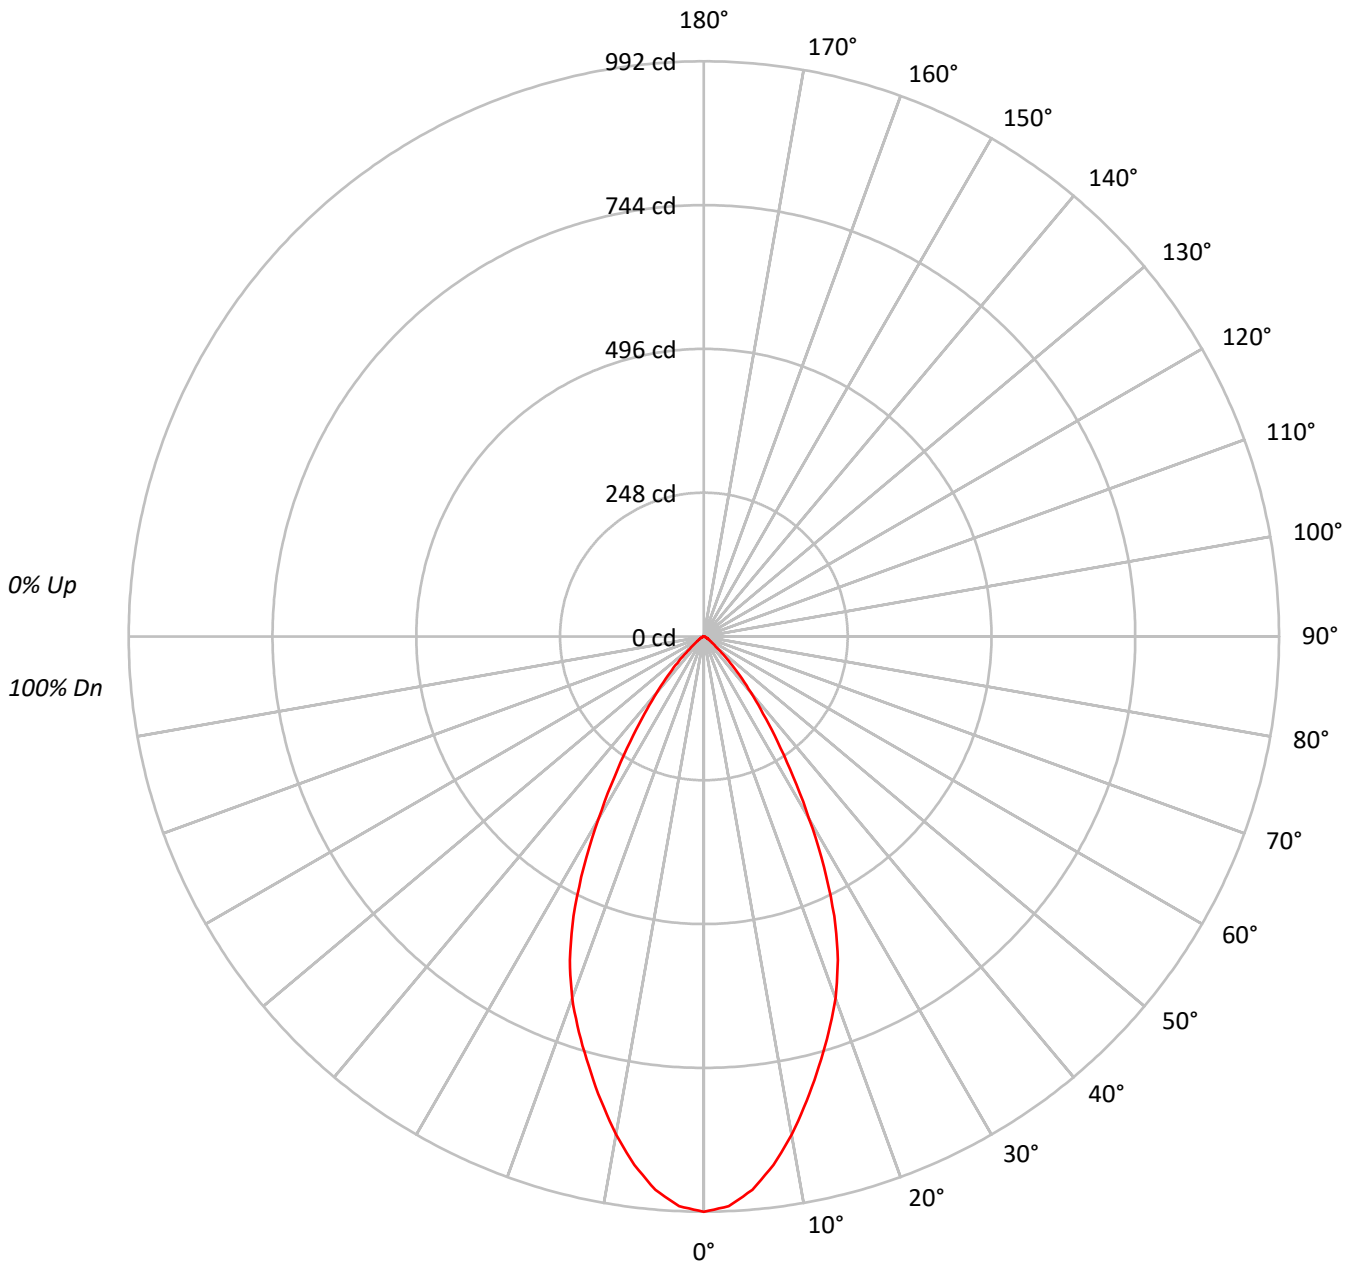



TEST NUMBER: P683899

CATALOG NUMBER: LX6C10D010 EX6C109035 6LBMDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	80	86	82	79	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62			
8	80	70	64	60	78	70	64	60	68	63	60	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54			
10	72	63	57	53	71	62	57	53	62	56	53	61	56	53	60	56	53	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	54398
5°	52718
10°	48541
15°	43542
20°	38743
25°	32173
30°	22985
35°	14777
40°	9003
45°	5008
50°	2217
55°	1281
60°	844
65°	597
70°	417
75°	318
80°	221
85°	126



TEST NUMBER: P683899

CATALOG NUMBER: LX6C10D010 EX6C109035 6LBMDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.7	11.7
10°-20°	214.6	28.4
20°-30°	238.7	31.6
30°-40°	141.4	18.7
40°-50°	51.8	6.9
50°-60°	13.0	1.7
60°-70°	4.7	0.6
70°-80°	1.6	0.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	542.0	71.8
0°-40°	683.4	90.5
0°-60°	748.3	99.1
0°-90°	755.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	755.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	992	
5°	958	89
15°	767	215
25°	532	239
35°	221	141
45°	65	52
55°	13	13
65°	5	5
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P683899

CATALOG NUMBER: LX6C10D010 EX6C109035 6LBMDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	992.3
2.5°	983.5
5°	958.0
7.5°	919.2
10°	872.0
12.5°	820.0
15°	767.2
17.5°	715.8
20°	664.1
22.5°	603.9
25°	531.9
27.5°	449.0
30°	363.1
32.5°	286.2
35°	220.8
37.5°	167.7
40°	125.8
42.5°	91.7
45°	64.6
47.5°	41.0
50°	26.0
52.5°	18.3
55°	13.4
57.5°	10.1
60°	7.7
62.5°	5.9
65°	4.6
67.5°	3.5
70°	2.6
72.5°	2.0
75°	1.5
77.5°	1.1
80°	0.7
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)