

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P563897

Luminaire Tested: **LX6C10D010 EX6C109030 6LBNH**

Issue Date: 2/15/2022

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P563897  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203666)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX6C10D010 EX6C109030 6LBNH  
Description: 6 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS  
AND 6LBN TRIM WITH H FINISH, DIM TO WARM  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.   Condition   Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 659.2 lumens  
Efficiency: N/A  
Efficacy: 67.3 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.84  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 9.8  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P563897

CATALOG NUMBER: LX6C10D010 EX6C109030 6LBNH

### Luminous Intensity Polar Plot

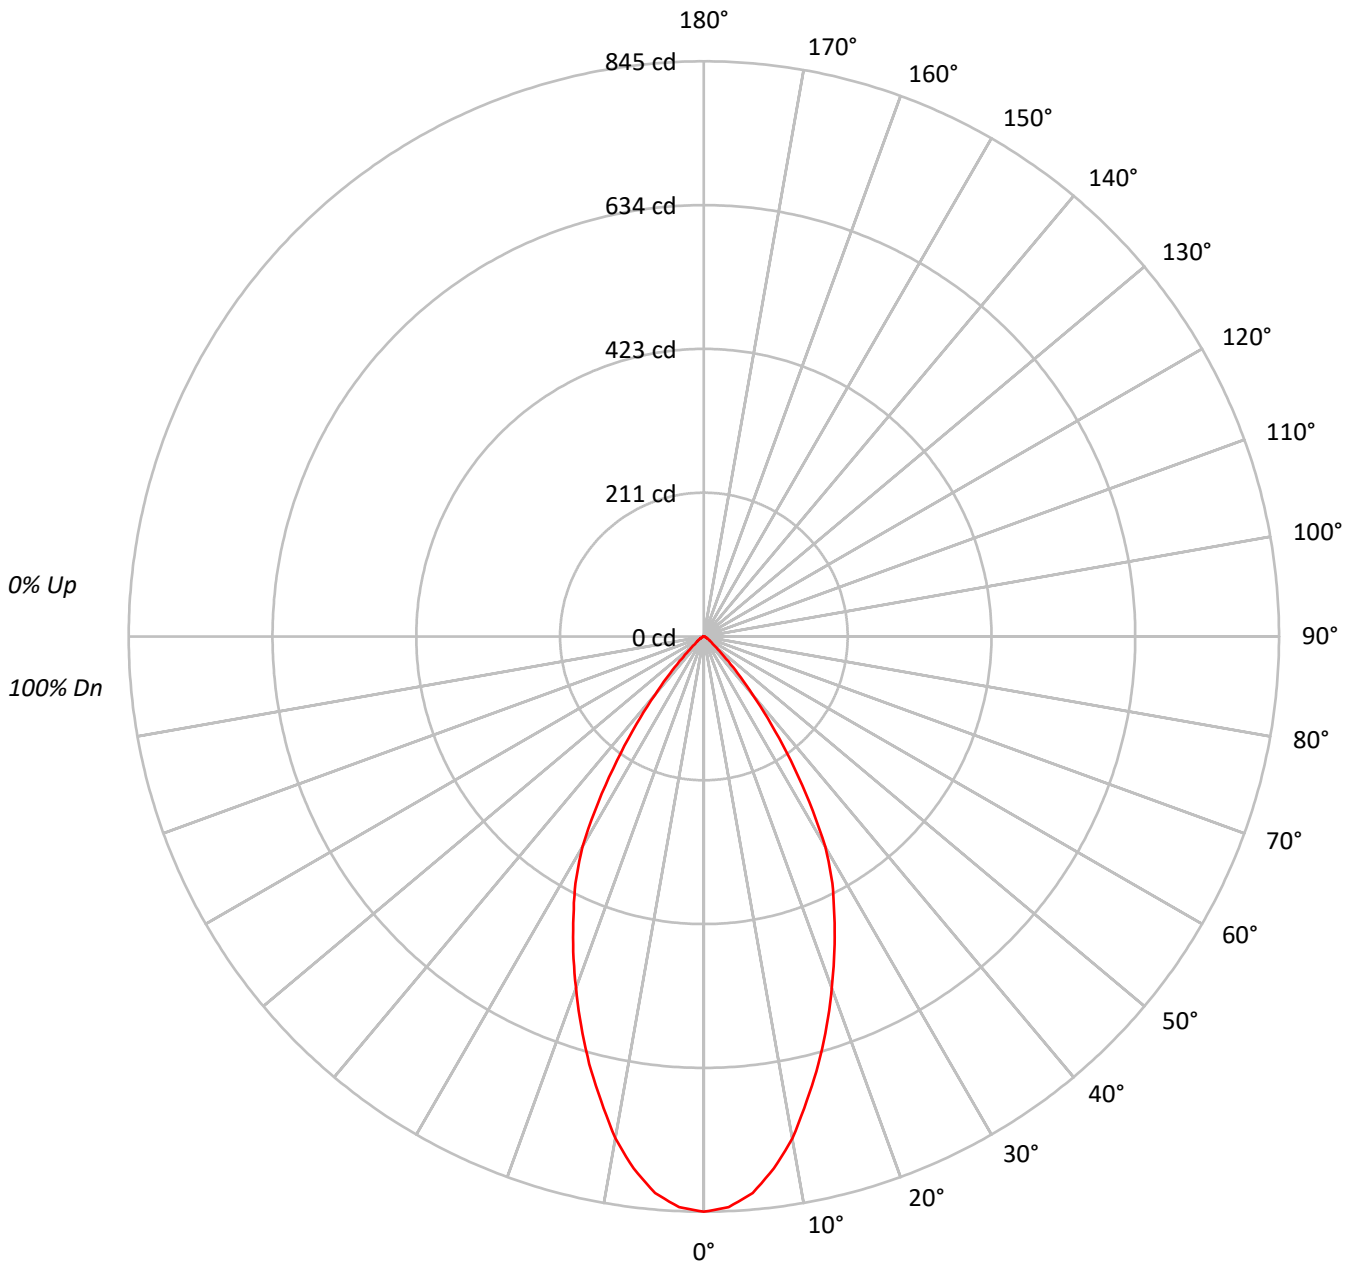



TEST NUMBER: P563897

CATALOG NUMBER: LX6C10D010 EX6C109030 6LBNH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	46323
5°	45174
10°	41683
15°	36901
20°	32045
25°	27407
30°	22592
35°	14884
40°	8001
45°	3543
50°	1441
55°	1042
60°	658
65°	480
70°	385
75°	254
80°	379
85°	0



TEST NUMBER: P563897

CATALOG NUMBER: LX6C10D010 EX6C109030 6LBNH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	76.0	11.5
10°-20°	181.2	27.5
20°-30°	207.6	31.5
30°-40°	139.5	21.2
40°-50°	39.9	6.0
50°-60°	9.8	1.5
60°-70°	3.7	0.6
70°-80°	1.4	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	464.7	70.5
0°-40°	604.2	91.7
0°-60°	653.9	99.2
0°-90°	659.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	659.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	845	
5°	821	76
15°	650	181
25°	453	208
35°	222	139
45°	46	40
55°	11	10
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P563897

CATALOG NUMBER: LX6C10D010 EX6C109030 6LBNH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	845.0
2.5°	839.0
5°	820.9
7.5°	788.4
10°	748.8
12.5°	698.3
15°	650.2
17.5°	599.7
20°	549.3
22.5°	501.2
25°	453.1
27.5°	408.6
30°	356.9
32.5°	288.5
35°	222.4
37.5°	162.2
40°	111.8
42.5°	73.3
45°	45.7
47.5°	27.7
50°	16.9
52.5°	13.2
55°	10.9
57.5°	8.4
60°	6.0
62.5°	4.8
65°	3.7
67.5°	2.4
70°	2.4
72.5°	1.2
75°	1.2
77.5°	1.2
80°	1.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)