

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P683881

Luminaire Tested: **LX6C100D010 EX6C1009030 6LBWH**

Issue Date: 2/15/2022



Test Information

Test Method: LM-79-08
Report Number: P683881
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P202739)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C100D010 EX6C1009030 6LBWH
Description: 6 INCH 10000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 6LBW TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9163.1 lumens
Efficiency: N/A
Efficacy: 80.1 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 114.4
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P683881

CATALOG NUMBER: LX6C100D010 EX6C1009030 6LBWH

Luminous Intensity Polar Plot

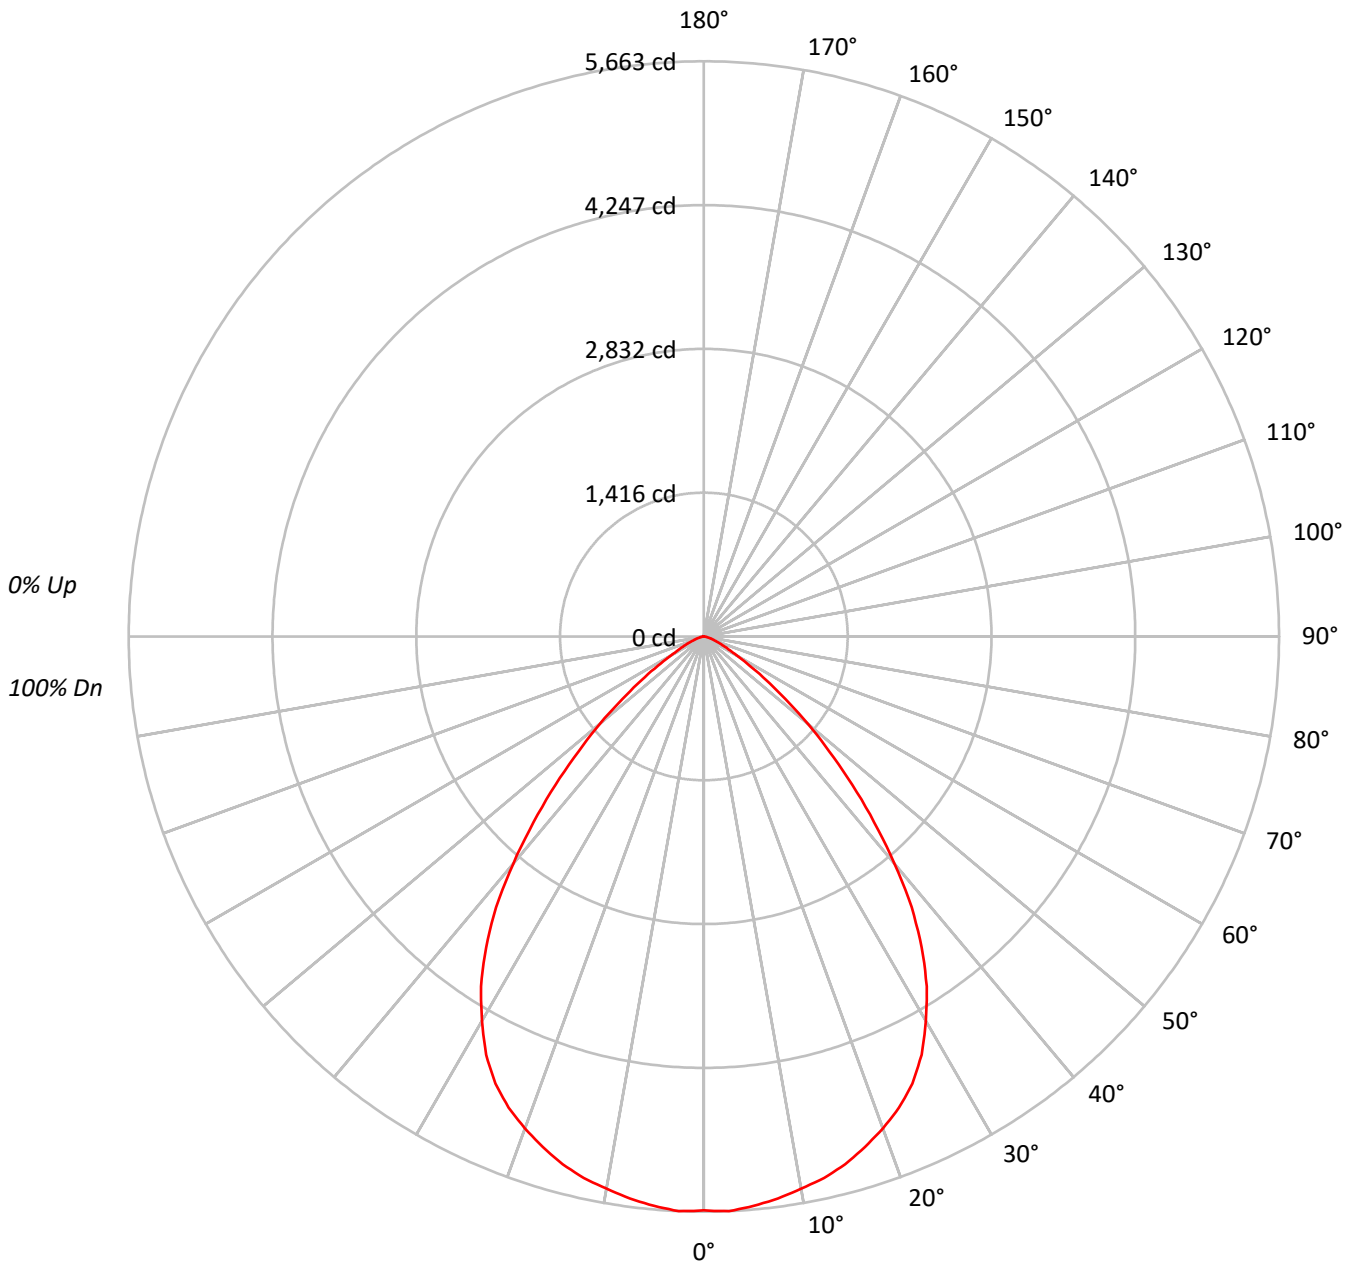



TEST NUMBER: P683881

CATALOG NUMBER: LX6C100D010 EX6C1009030 6LBWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			73
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			65
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			59
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			53
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			49
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			41
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	309811
5°	309701
10°	307320
15°	305263
20°	300612
25°	293745
30°	276581
35°	250299
40°	209013
45°	160156
50°	113421
55°	71510
60°	40337
65°	26190
70°	17102
75°	12560
80°	7545
85°	7548



TEST NUMBER: P683881

CATALOG NUMBER: LX6C100D010 EX6C1009030 6LBWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	533.8	5.8
10°-20°	1514.6	16.5
20°-30°	2220.8	24.2
30°-40°	2311.3	25.2
40°-50°	1599.1	17.5
50°-60°	696.2	7.6
60°-70°	213.5	2.3
70°-80°	64.0	0.7
80°-90°	9.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4269.2	46.6
0°-40°	6580.4	71.8
0°-60°	8875.8	96.9
0°-90°	9163.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9163.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5651	
5°	5628	534
15°	5379	1515
25°	4856	2221
35°	3740	2311
45°	2066	1599
55°	748	696
65°	202	214
75°	59	64
85°	12	10
90°	0	



TEST NUMBER: P683881

CATALOG NUMBER: LX6C100D010 EX6C1009030 6LBWH

CANDELA DISTRIBUTION (FULL):

0°	
0°	5651.4
2.5°	5663.4
5°	5627.9
7.5°	5580.6
10°	5520.8
12.5°	5461.5
15°	5378.7
17.5°	5271.5
20°	5152.9
22.5°	5022.3
25°	4856.3
27.5°	4642.4
30°	4369.3
32.5°	4084.2
35°	3740.1
37.5°	3360.3
40°	2920.7
42.5°	2481.5
45°	2065.8
47.5°	1674.0
50°	1329.9
52.5°	1009.4
55°	748.2
57.5°	534.4
60°	367.9
62.5°	273.2
65°	201.9
67.5°	154.5
70°	106.7
72.5°	83.2
75°	59.3
77.5°	35.4
80°	23.9
82.5°	12.0
85°	12.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)