

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P683910

Luminaire Tested: **LX6C100D010 EX6C1009040 6LBSQH**

Issue Date: 2/16/2022



Test Information

Test Method: LM-79-08
Report Number: P683910
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203254)
Test Lab: INNOVATION CENTER
Issue Date: 2/16/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C100D010 EX6C1009040 6LBSQH
Description: 6 INCH 10000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS
AND 6LBSQ TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6458.0 lumens
Efficiency: N/A
Efficacy: 56.5 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 114.4
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P683910

CATALOG NUMBER: LX6C100D010 EX6C1009040 6LBSQH

Luminous Intensity Polar Plot

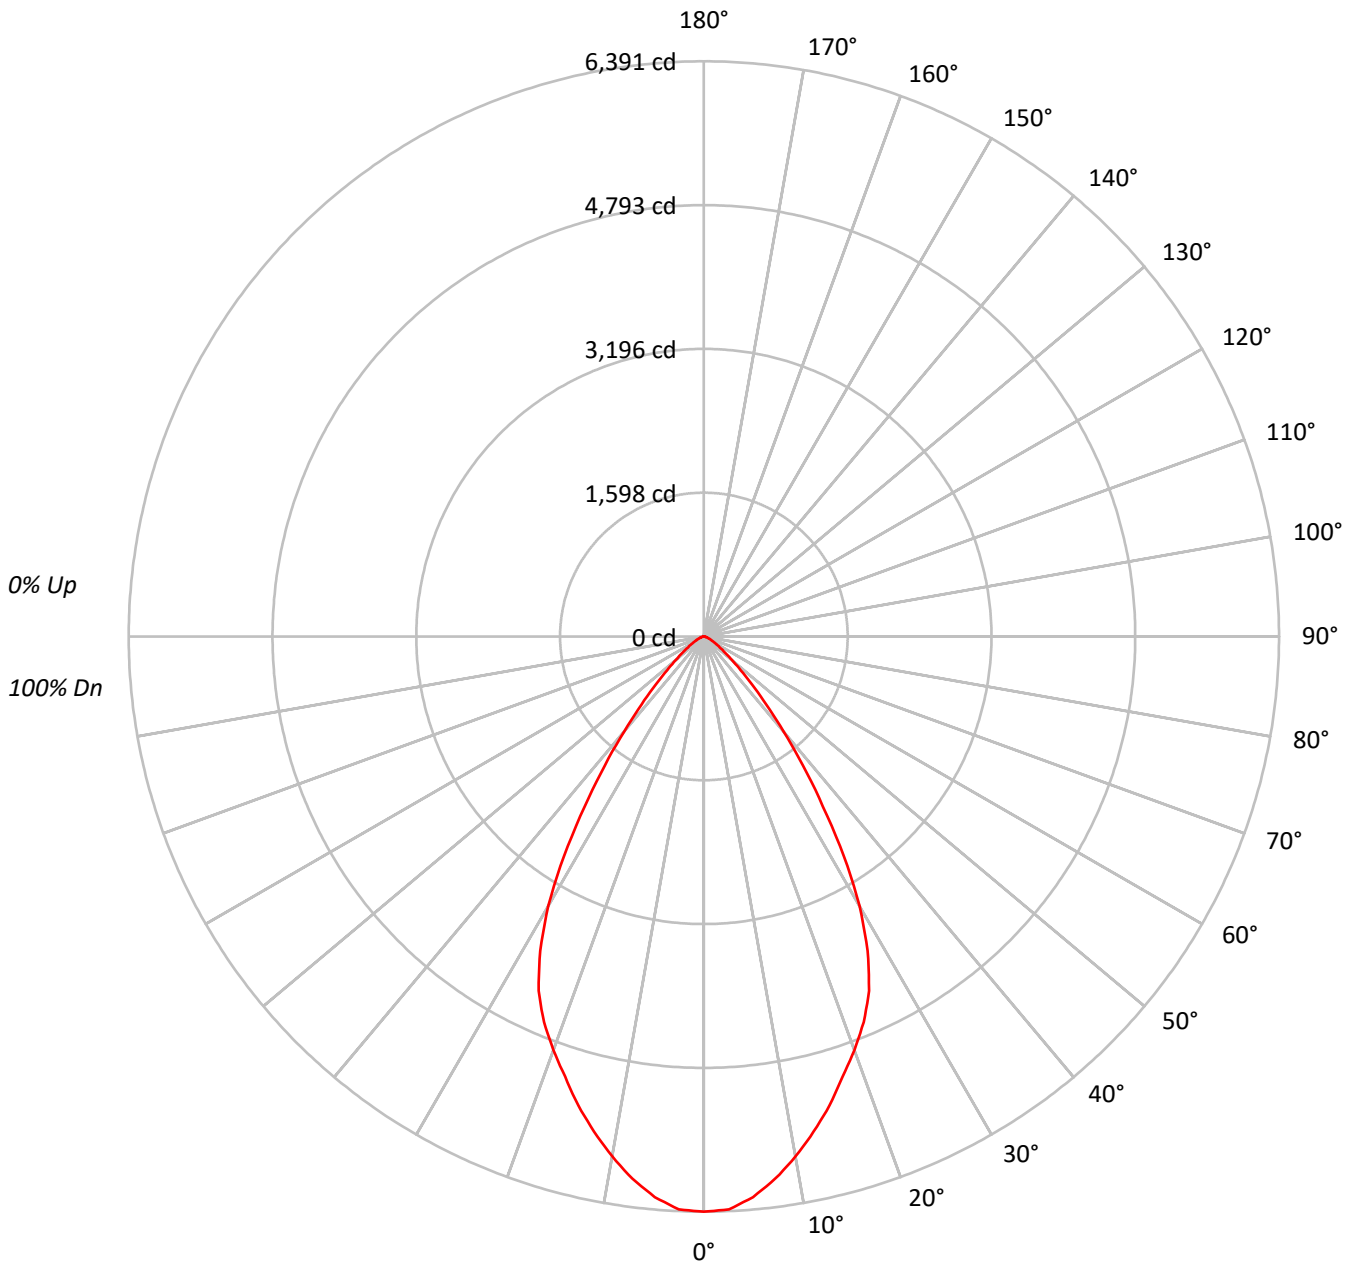



TEST NUMBER: P683910

CATALOG NUMBER: LX6C100D010 EX6C1009040 6LBSQH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92	92	92	92
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	84	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72	72	72	72
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61	61	61	61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57	57	57	57
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53	53	53	53
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49	49	49	49
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46	46	46	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	275177
5°	270251
10°	256443
15°	240475
20°	223958
25°	206355
30°	171939
35°	121185
40°	77232
45°	46057
50°	27188
55°	17295
60°	11909
65°	8456
70°	5816
75°	4608
80°	2256
85°	0



TEST NUMBER: P683910

CATALOG NUMBER: LX6C100D010 EX6C1009040 6LBSQH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	584.4	9.0
10°-20°	1511.7	23.4
20°-30°	1958.8	30.3
30°-40°	1454.2	22.5
40°-50°	613.9	9.5
50°-60°	218.0	3.4
60°-70°	84.1	1.3
70°-80°	29.1	0.5
80°-90°	3.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4054.9	62.8
0°-40°	5509.1	85.3
0°-60°	6341.0	98.2
0°-90°	6458.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6458.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6391	
5°	6253	584
15°	5395	1512
25°	4344	1959
35°	2306	1454
45°	756	614
55°	230	218
65°	83	84
75°	28	29
85°	0	4
90°	0	



TEST NUMBER: P683910

CATALOG NUMBER: LX6C100D010 EX6C1009040 6LBSQH

CANDELA DISTRIBUTION (FULL):

	0°
0°	6391.2
2.5°	6372.6
5°	6252.9
7.5°	6077.4
10°	5865.6
12.5°	5634.8
15°	5394.9
17.5°	5127.7
20°	4887.9
22.5°	4638.9
25°	4343.7
27.5°	3937.8
30°	3458.4
32.5°	2895.7
35°	2305.6
37.5°	1807.6
40°	1374.1
42.5°	1023.6
45°	756.4
47.5°	553.3
50°	405.9
52.5°	304.3
55°	230.4
57.5°	175.1
60°	138.3
62.5°	101.6
65°	83.0
67.5°	64.4
70°	46.2
72.5°	36.8
75°	27.7
77.5°	18.6
80°	9.1
82.5°	9.1
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)