

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856585

Luminaire Tested: **LD6C120D010 EU61209035 6LBWLI**

Issue Date: 2/15/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P856585  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205209)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD6C120D010 EU61209035 6LBWLI  
Description: 6 INCH 12000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS  
AND 6LBW TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 12698.1 lumens  
Efficiency: N/A  
Efficacy: 89.2 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 142.3  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P856585

CATALOG NUMBER: LD6C120D010 EU61209035 6LBWLI

### Luminous Intensity Polar Plot

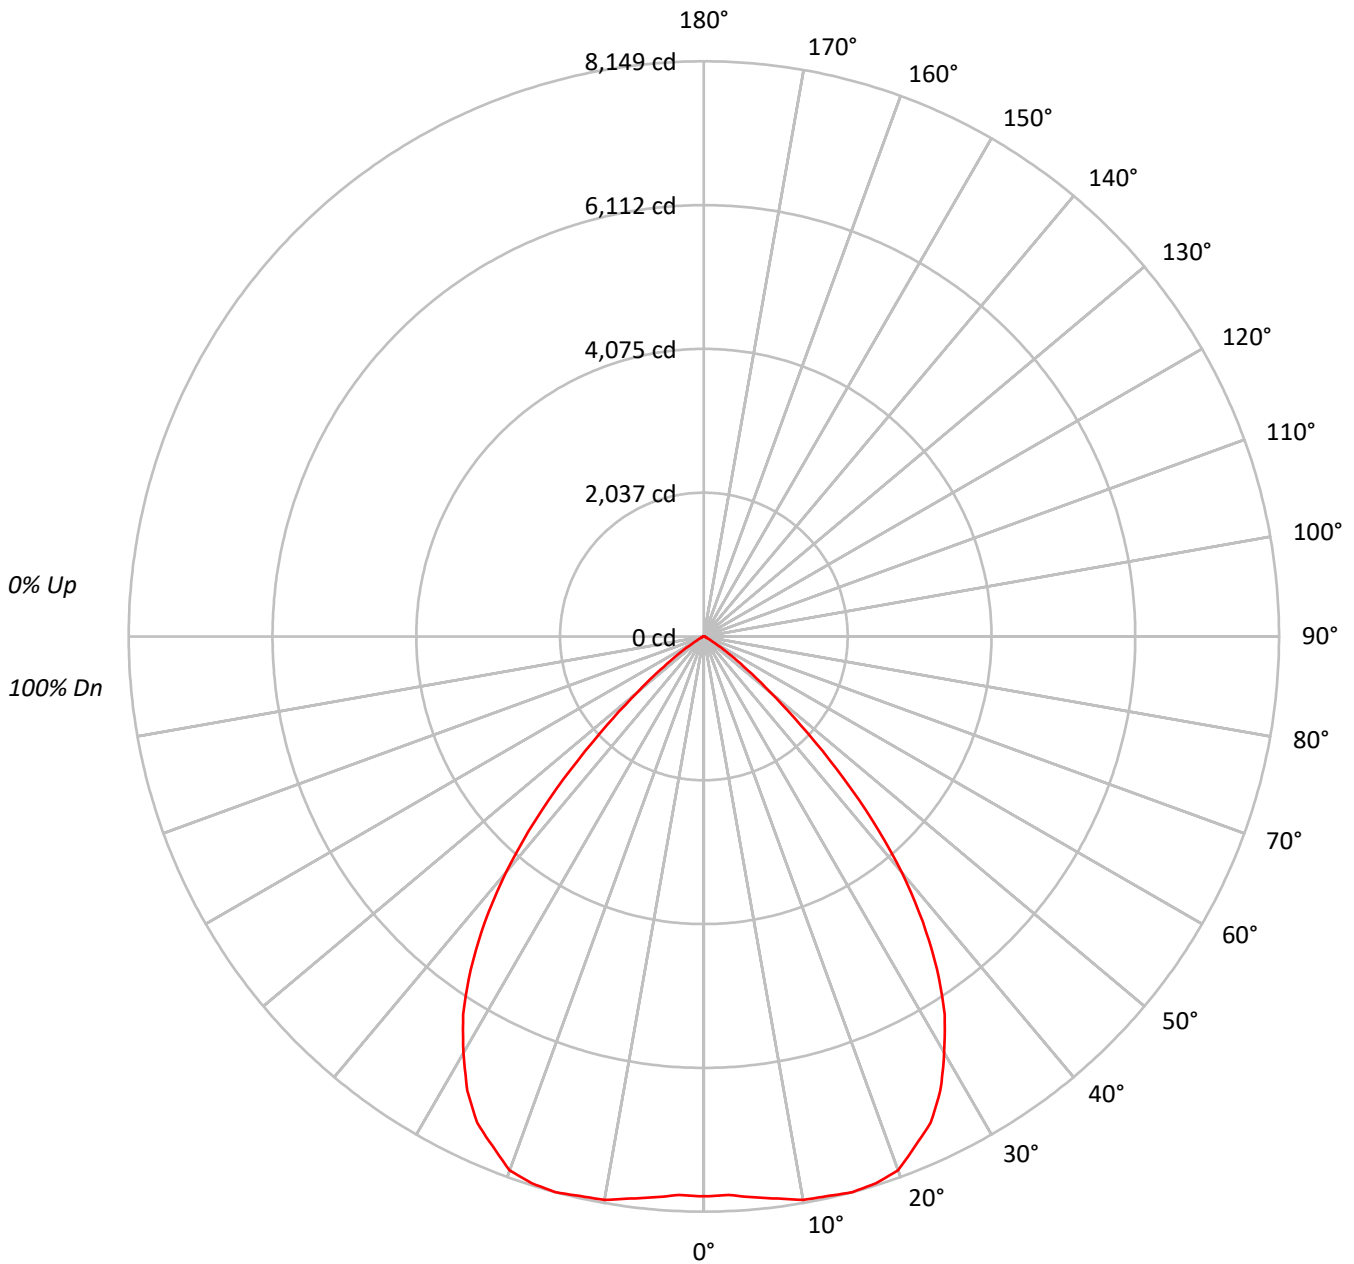



TEST NUMBER: P856585

CATALOG NUMBER: LD6C120D010 EU61209035 6LBWLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92	92	92	92
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83	83	83	83
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76	76	76	76
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69	69	69	69
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63	63	63	63
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57	57	57	57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52	52	52	52
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48	48	48	48
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44	44	44	44
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41	41	41	41

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	434877
5°	438899
10°	451183
15°	462471
20°	469490
25°	459789
30°	431073
35°	385403
40°	312171
45°	206502
50°	104380
55°	44041
60°	14187
65°	5578
70°	4648
75°	3071
80°	0
85°	0



TEST NUMBER: P856585

CATALOG NUMBER: LD6C120D010 EU61209035 6LBWLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	765.3	6.0
10°-20°	2300.2	18.1
20°-30°	3467.4	27.3
30°-40°	3549.0	27.9
40°-50°	2067.5	16.3
50°-60°	475.1	3.7
60°-70°	58.3	0.5
70°-80°	15.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6532.8	51.4
0°-40°	10081.8	79.4
0°-60°	12624.5	99.4
0°-90°	12698.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	12698.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7933	
5°	7976	765
15°	8149	2300
25°	7601	3467
35°	5759	3549
45°	2664	2068
55°	461	475
65°	43	58
75°	14	15
85°	0	0
90°	0	



TEST NUMBER: P856585

CATALOG NUMBER: LD6C120D010 EU61209035 6LBWLI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7932.8
2.5°	7918.3
5°	7975.7
7.5°	8033.2
10°	8105.2
12.5°	8119.7
15°	8148.7
17.5°	8119.7
20°	8047.7
22.5°	7817.3
25°	7601.4
27.5°	7256.1
30°	6809.9
32.5°	6349.1
35°	5758.9
37.5°	5096.3
40°	4362.2
42.5°	3541.6
45°	2663.6
47.5°	1857.0
50°	1223.9
52.5°	777.6
55°	460.8
57.5°	244.9
60°	129.4
62.5°	72.0
65°	43.0
67.5°	43.0
70°	29.0
72.5°	14.5
75°	14.5
77.5°	14.5
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)