

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P683963

Luminaire Tested: **LX6C120D010 EX6C1209035 6LBSH**

Issue Date: 2/15/2022



Test Information

Test Method: LM-79-08
Report Number: P683963
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P204188)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C120D010 EX6C1209035 6LBSH
Description: 6 INCH 12000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS
AND 6LBS TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13088.0 lumens
Efficiency: N/A
Efficacy: 92.0 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 142.3
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P683963

CATALOG NUMBER: LX6C120D010 EX6C1209035 6LBSH

Luminous Intensity Polar Plot

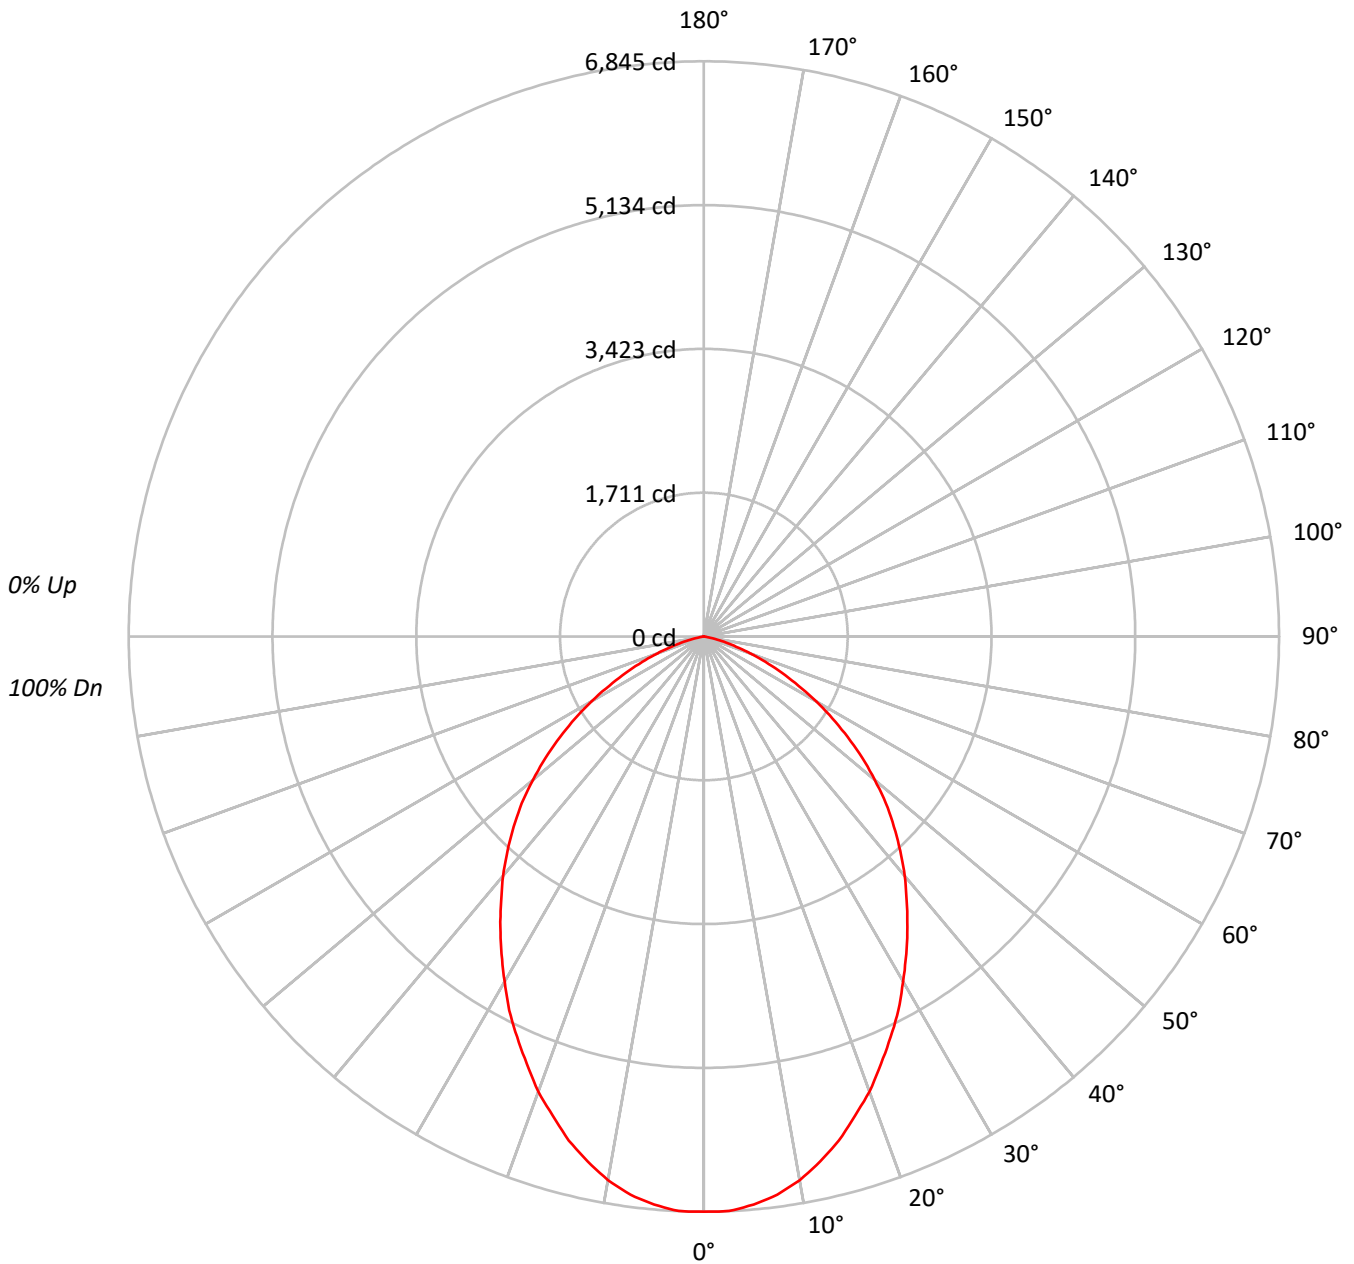



TEST NUMBER: P683963

CATALOG NUMBER: LX6C120D010 EX6C1209035 6LBSH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	375244
5°	373497
10°	365786
15°	352488
20°	336274
25°	318151
30°	300103
35°	282576
40°	266070
45°	248018
50°	226142
55°	199716
60°	169043
65°	132738
70°	94711
75°	51893
80°	9124
85°	0



TEST NUMBER: P683963

CATALOG NUMBER: LX6C120D010 EX6C1209035 6LBSH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	641.1	4.9
10°-20°	1742.6	13.3
20°-30°	2420.1	18.5
30°-40°	2641.0	20.2
40°-50°	2463.6	18.8
50°-60°	1869.9	14.3
60°-70°	1023.9	7.8
70°-80°	281.8	2.2
80°-90°	3.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4803.9	36.7
0°-40°	7444.8	56.9
0°-60°	11778.4	90.0
0°-90°	13088.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	13088.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6845	
5°	6787	641
15°	6211	1743
25°	5260	2420
35°	4222	2641
45°	3199	2464
55°	2090	1870
65°	1023	1024
75°	245	282
85°	0	4
90°	0	



TEST NUMBER: P683963

CATALOG NUMBER: LX6C120D010 EX6C1209035 6LBSH

CANDELA DISTRIBUTION (FULL):

0°	
0°	6845.0
2.5°	6845.0
5°	6787.2
7.5°	6700.7
10°	6571.1
12.5°	6398.2
15°	6210.8
17.5°	5980.2
20°	5764.2
22.5°	5504.8
25°	5259.8
27.5°	5014.8
30°	4740.9
32.5°	4481.5
35°	4222.4
37.5°	3962.9
40°	3718.0
42.5°	3458.5
45°	3199.1
47.5°	2939.7
50°	2651.6
52.5°	2377.7
55°	2089.6
57.5°	1815.7
60°	1541.8
62.5°	1268.3
65°	1023.3
67.5°	792.5
70°	590.9
72.5°	403.5
75°	245.0
77.5°	115.4
80°	28.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)