

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P683973

Luminaire Tested: **LX6C120D010 EX6C1209040 6LBWH**

Issue Date: 2/15/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P683973  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P202739)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX6C120D010 EX6C1209040 6LBWH  
Description: 6 INCH 12000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS  
AND 6LBW TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 11132.0 lumens  
Efficiency: N/A  
Efficacy: 78.2 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 142.3  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P683973

CATALOG NUMBER: LX6C120D010 EX6C1209040 6LBWH

### Luminous Intensity Polar Plot

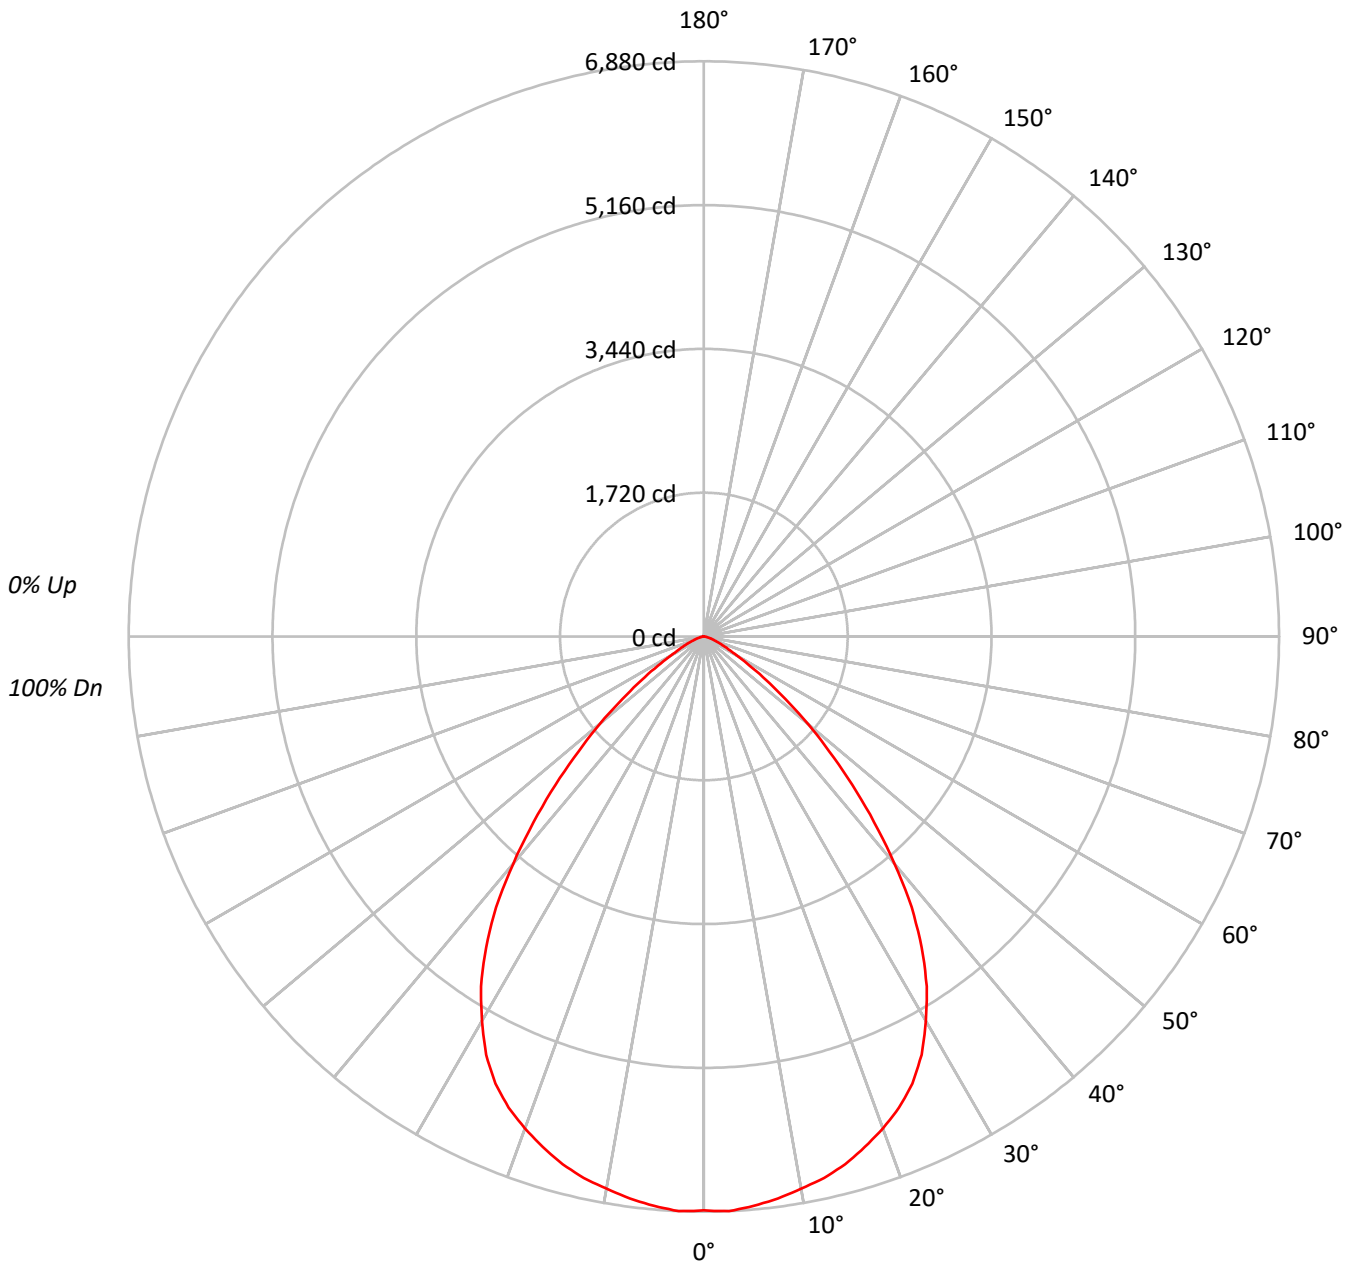



TEST NUMBER: P683973

CATALOG NUMBER: LX6C120D010 EX6C1209040 6LBWH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			73
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			65
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			59
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			53
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			49
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			41
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			38

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	376384
5°	376254
10°	373356
15°	370859
20°	365210
25°	356863
30°	336014
35°	304085
40°	253926
45°	194571
50°	137795
55°	86879
60°	49009
65°	31819
70°	20773
75°	15271
80°	9155
85°	9120



TEST NUMBER: P683973

CATALOG NUMBER: LX6C120D010 EX6C1209040 6LBWH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	648.5	5.8
10°-20°	1840.1	16.5
20°-30°	2698.0	24.2
30°-40°	2807.9	25.2
40°-50°	1942.7	17.5
50°-60°	845.9	7.6
60°-70°	259.4	2.3
70°-80°	77.7	0.7
80°-90°	11.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5186.6	46.6
0°-40°	7994.5	71.8
0°-60°	10783.0	96.9
0°-90°	11132.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11132.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6866	
5°	6837	648
15°	6534	1840
25°	5900	2698
35°	4544	2808
45°	2510	1943
55°	909	846
65°	245	259
75°	72	78
85°	14	12
90°	0	



TEST NUMBER: P683973

CATALOG NUMBER: LX6C120D010 EX6C1209040 6LBWH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6865.8
2.5°	6880.3
5°	6837.3
7.5°	6779.7
10°	6707.1
12.5°	6635.1
15°	6534.5
17.5°	6404.3
20°	6260.2
22.5°	6101.5
25°	5899.8
27.5°	5640.0
30°	5308.2
32.5°	4961.8
35°	4543.8
37.5°	4082.4
40°	3548.3
42.5°	3014.7
45°	2509.7
47.5°	2033.7
50°	1615.7
52.5°	1226.3
55°	909.0
57.5°	649.2
60°	447.0
62.5°	331.9
65°	245.3
67.5°	187.7
70°	129.6
72.5°	101.1
75°	72.1
77.5°	43.0
80°	29.0
82.5°	14.5
85°	14.5
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)