

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P683985

Luminaire Tested: **LX6C120D010 EX6C1209730 6LBSH**

Issue Date: 2/15/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P683985  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P204188)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX6C120D010 EX6C1209730 6LBSH  
Description: 6 INCH 12000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 97CRI LEDS  
AND 6LBS TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 12906.0 lumens  
Efficiency: N/A  
Efficacy: 90.7 lumens/watt  
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 142.3  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P683985

CATALOG NUMBER: LX6C120D010 EX6C1209730 6LBSH

### Luminous Intensity Polar Plot

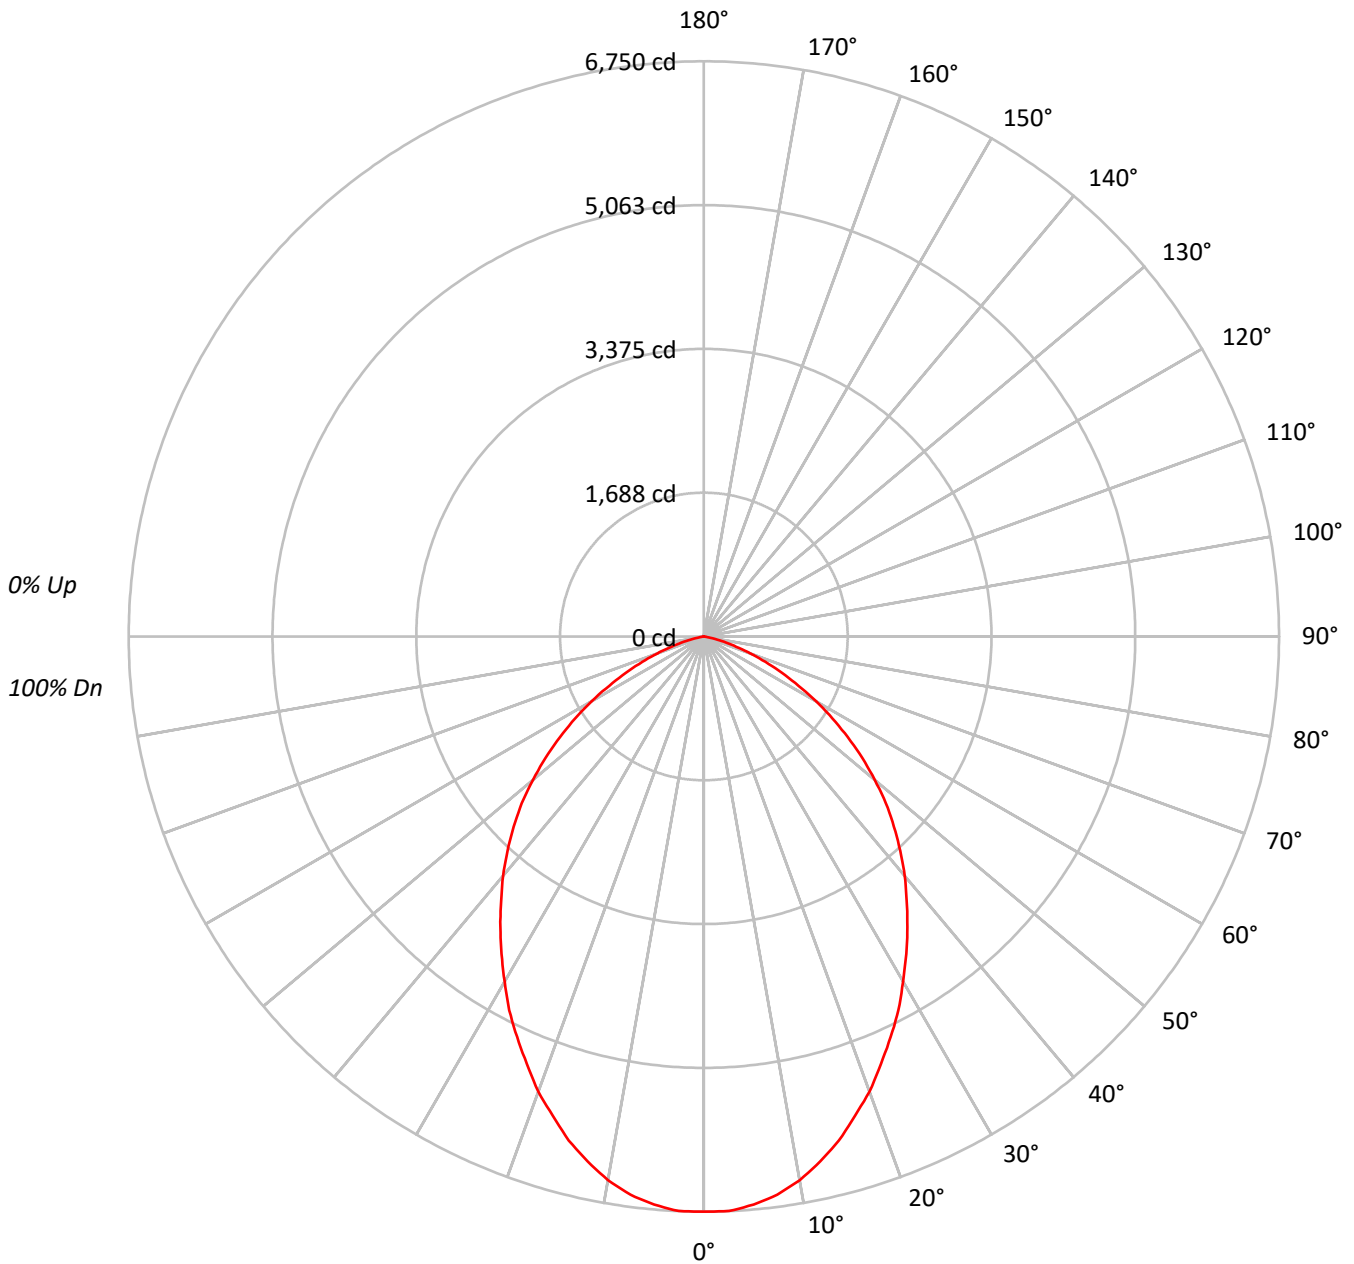



TEST NUMBER: P683985

CATALOG NUMBER: LX6C120D010 EX6C1209730 6LBSH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	370031
5°	368302
10°	360704
15°	347584
20°	331601
25°	313730
30°	295932
35°	278648
40°	262370
45°	244568
50°	222995
55°	196944
60°	166697
65°	130896
70°	93397
75°	51173
80°	8997
85°	0



TEST NUMBER: P683985

CATALOG NUMBER: LX6C120D010 EX6C1209730 6LBSH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	632.2	4.9
10°-20°	1718.4	13.3
20°-30°	2386.5	18.5
30°-40°	2604.2	20.2
40°-50°	2429.3	18.8
50°-60°	1843.9	14.3
60°-70°	1009.7	7.8
70°-80°	277.9	2.2
80°-90°	3.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4737.1	36.7
0°-40°	7341.3	56.9
0°-60°	11614.6	90.0
0°-90°	12906.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	12906.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6750	
5°	6693	632
15°	6124	1718
25°	5187	2386
35°	4164	2604
45°	3155	2429
55°	2061	1844
65°	1009	1010
75°	242	278
85°	0	4
90°	0	



TEST NUMBER: P683985

CATALOG NUMBER: LX6C120D010 EX6C1209730 6LBSH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6749.9
2.5°	6749.9
5°	6692.8
7.5°	6607.5
10°	6479.8
12.5°	6309.2
15°	6124.4
17.5°	5897.1
20°	5684.1
22.5°	5428.2
25°	5186.7
27.5°	4945.1
30°	4675.0
32.5°	4419.2
35°	4163.7
37.5°	3907.8
40°	3666.3
42.5°	3410.4
45°	3154.6
47.5°	2898.8
50°	2614.7
52.5°	2344.6
55°	2060.6
57.5°	1790.5
60°	1520.4
62.5°	1250.6
65°	1009.1
67.5°	781.4
70°	582.7
72.5°	397.9
75°	241.6
77.5°	113.8
80°	28.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)