

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856599

Luminaire Tested: **LD6C15D010 EU6159030 6LBWLI**

Issue Date: 2/15/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P856599  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205209)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD6C15D010 EU6159030 6LBWLI  
Description: 6 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS  
AND 6LBW TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1595.0 lumens  
Efficiency: N/A  
Efficacy: 100.9 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 15.8  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P856599

CATALOG NUMBER: LD6C15D010 EU6159030 6LBWLI

### Luminous Intensity Polar Plot

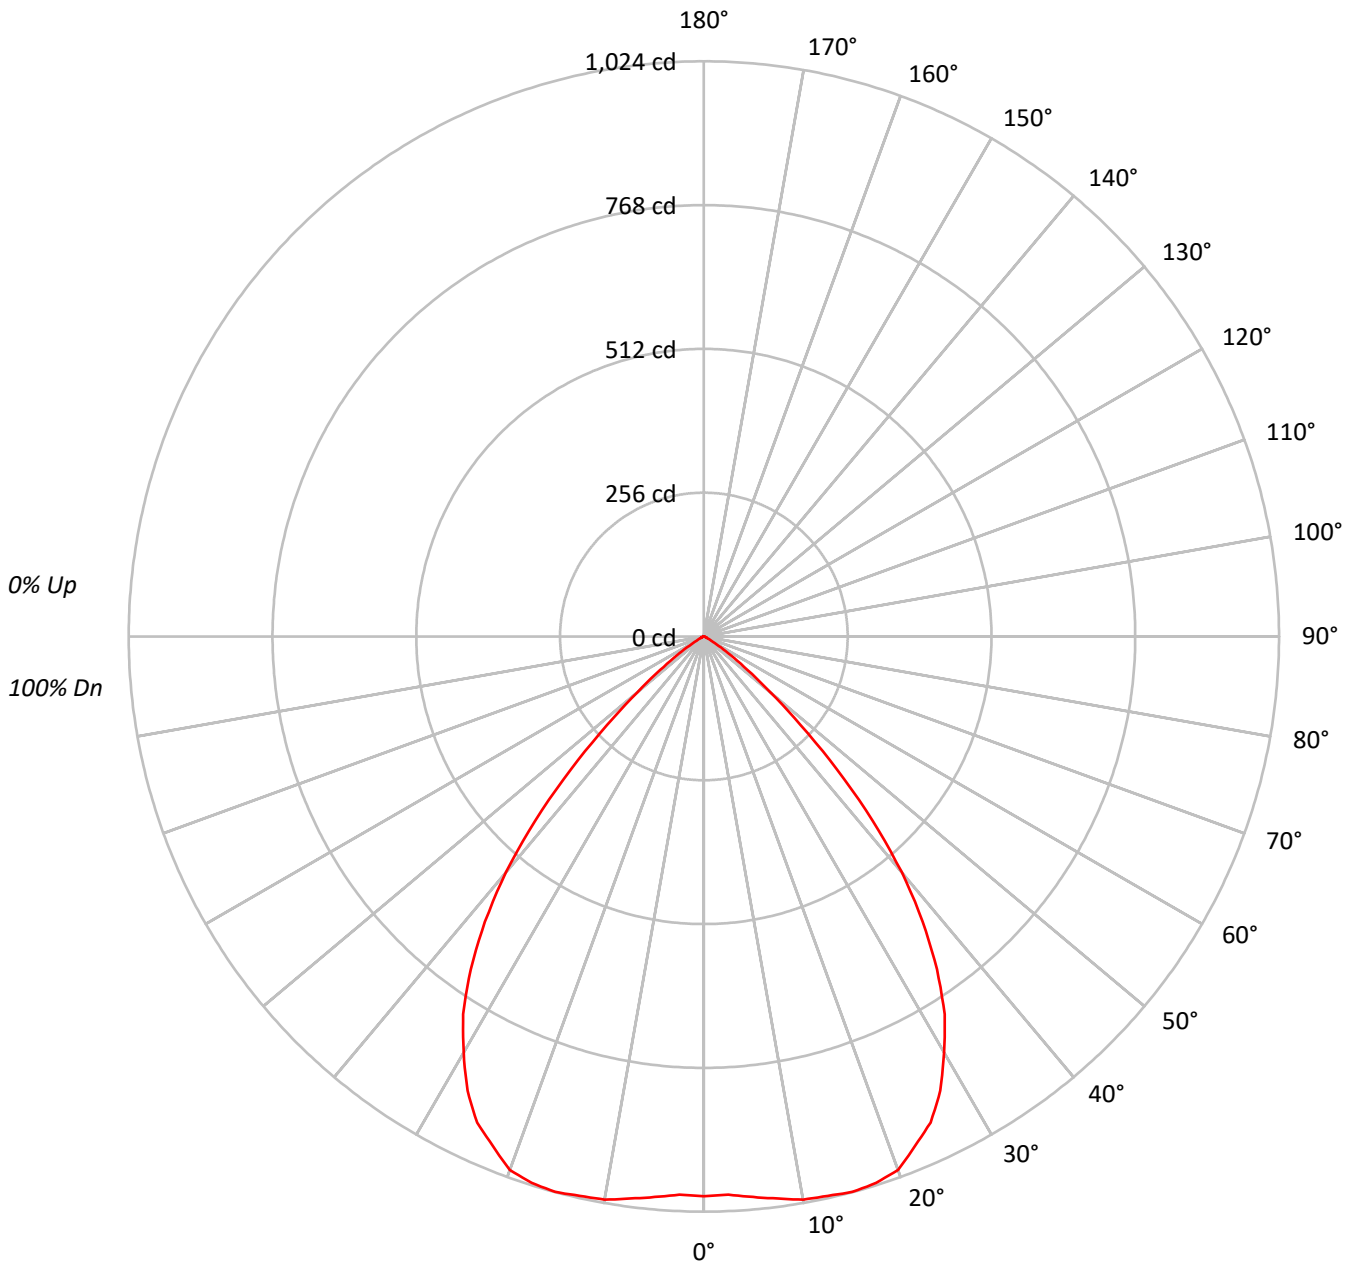



TEST NUMBER: P856599

CATALOG NUMBER: LD6C15D010 EU6159030 6LBWLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92			92
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			83
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76			76
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69			69
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63			63
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57			57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52			52
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48			48
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44			44
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41			41

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	54623
5°	55129
10°	56673
15°	58093
20°	58974
25°	57753
30°	54148
35°	48412
40°	39209
45°	25941
50°	13108
55°	5534
60°	1787
65°	700
70°	577
75°	381
80°	0
85°	0



TEST NUMBER: P856599

CATALOG NUMBER: LD6C15D010 EU6159030 6LBWLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	96.1	6.0
10°-20°	288.9	18.1
20°-30°	435.5	27.3
30°-40°	445.8	27.9
40°-50°	259.7	16.3
50°-60°	59.7	3.7
60°-70°	7.3	0.5
70°-80°	1.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	820.6	51.4
0°-40°	1266.4	79.4
0°-60°	1585.8	99.4
0°-90°	1595.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1595.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	996	
5°	1002	96
15°	1024	289
25°	955	436
35°	723	446
45°	335	260
55°	58	60
65°	5	7
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P856599

CATALOG NUMBER: LD6C15D010 EU6159030 6LBWLI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	996.4
2.5°	994.6
5°	1001.8
7.5°	1009.1
10°	1018.1
12.5°	1019.9
15°	1023.6
17.5°	1019.9
20°	1010.9
22.5°	981.9
25°	954.8
27.5°	911.4
30°	855.4
32.5°	797.5
35°	723.4
37.5°	640.1
40°	547.9
42.5°	444.9
45°	334.6
47.5°	233.3
50°	153.7
52.5°	97.7
55°	57.9
57.5°	30.8
60°	16.3
62.5°	9.0
65°	5.4
67.5°	5.4
70°	3.6
72.5°	1.8
75°	1.8
77.5°	1.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)