

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P563907

Luminaire Tested: **LX6C15D010 EX6C159030 6LBMH**

Issue Date: 2/15/2022



Test Information

Test Method: LM-79-08
Report Number: P563907
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203254)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C15D010 EX6C159030 6LBMH
Description: 6 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 6LBM TRIM WITH H FINISH, DIM TO WARM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1154.0 lumens
Efficiency: N/A
Efficacy: 73.0 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P563907

CATALOG NUMBER: LX6C15D010 EX6C159030 6LBMH

Luminous Intensity Polar Plot

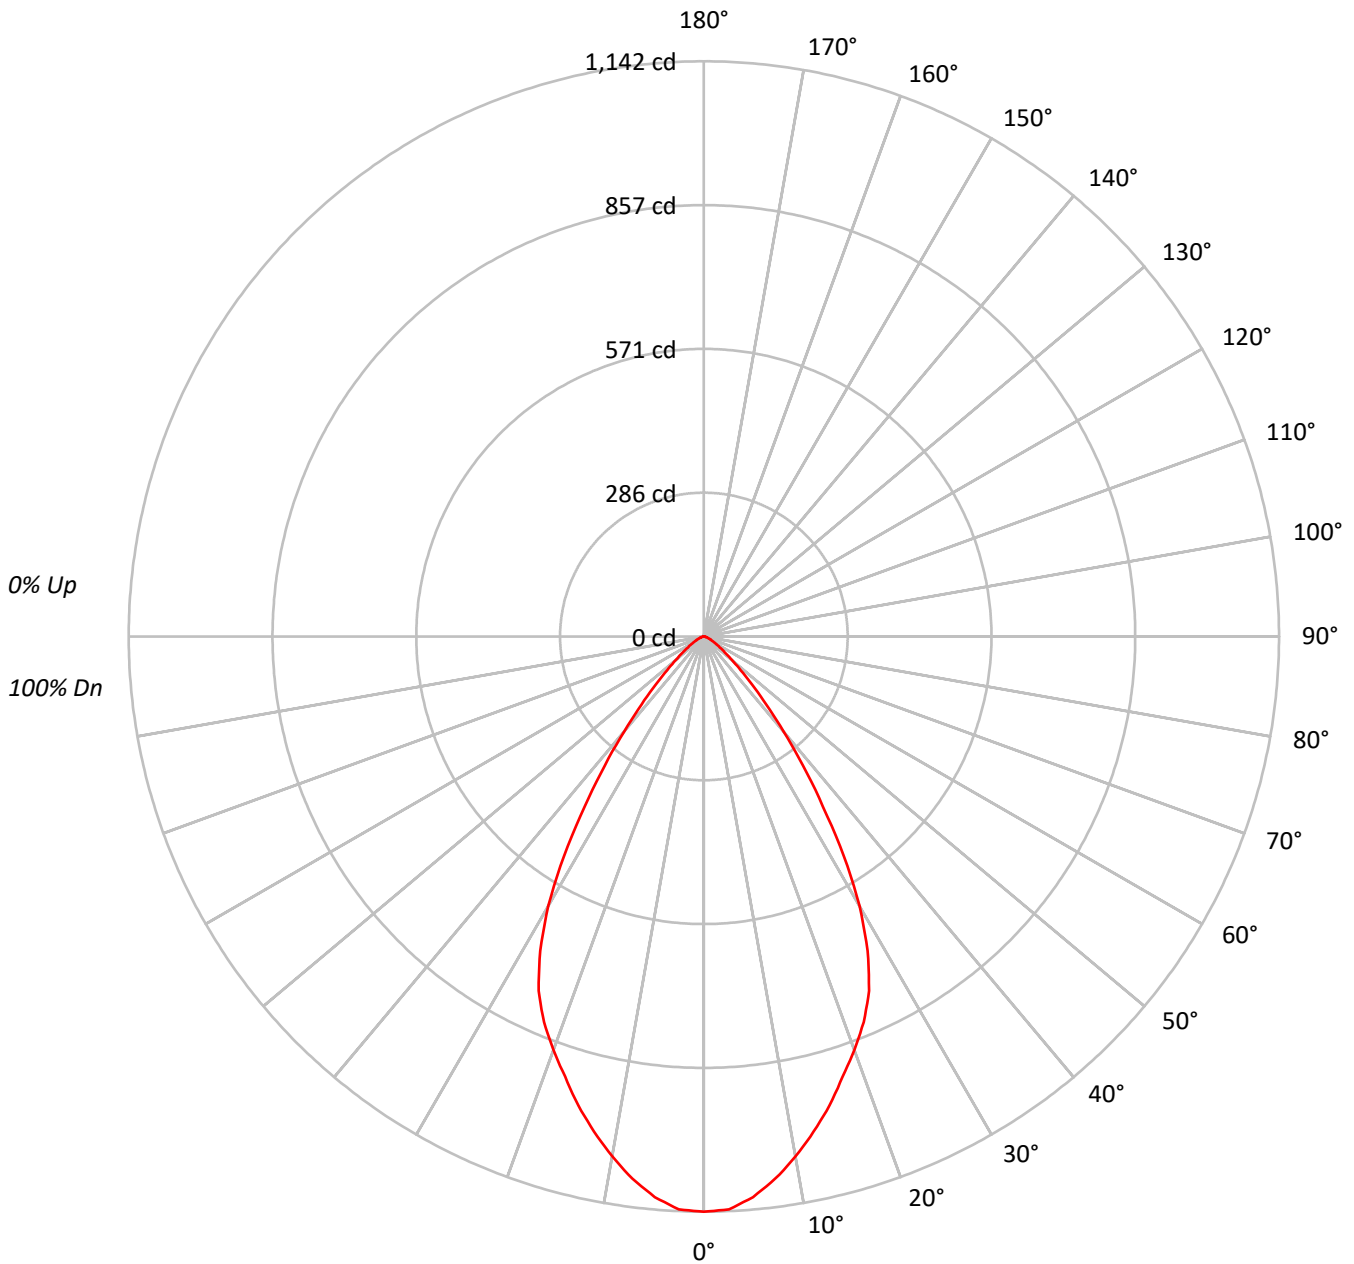



TEST NUMBER: P563907

CATALOG NUMBER: LX6C15D010 EX6C159030 6LBMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92			92																
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	88	84	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72			72																
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61			61																
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			57																
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53			53																
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49			49																
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	62610
5°	61485
10°	58343
15°	54711
20°	50953
25°	46950
30°	39120
35°	27572
40°	17569
45°	10482
50°	6183
55°	3938
60°	2708
65°	1920
70°	1330
75°	1038
80°	505
85°	0



TEST NUMBER: P563907

CATALOG NUMBER: LX6C15D010 EX6C159030 6LBMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.4	9.0
10°-20°	270.1	23.4
20°-30°	350.0	30.3
30°-40°	259.9	22.5
40°-50°	109.7	9.5
50°-60°	39.0	3.4
60°-70°	15.0	1.3
70°-80°	5.2	0.5
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	724.6	62.8
0°-40°	984.4	85.3
0°-60°	1133.1	98.2
0°-90°	1154.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1154.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1142	
5°	1117	104
15°	964	270
25°	776	350
35°	412	260
45°	135	110
55°	41	39
65°	15	15
75°	5	5
85°	0	1
90°	0	



TEST NUMBER: P563907

CATALOG NUMBER: LX6C15D010 EX6C159030 6LBMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1142.1
2.5°	1138.7
5°	1117.3
7.5°	1086.0
10°	1048.1
12.5°	1006.9
15°	964.0
17.5°	916.3
20°	873.4
22.5°	828.9
25°	776.2
27.5°	703.7
30°	618.0
32.5°	517.4
35°	412.0
37.5°	323.0
40°	245.5
42.5°	182.9
45°	135.2
47.5°	98.9
50°	72.5
52.5°	54.4
55°	41.2
57.5°	31.3
60°	24.7
62.5°	18.1
65°	14.8
67.5°	11.5
70°	8.3
72.5°	6.6
75°	4.9
77.5°	3.3
80°	1.6
82.5°	1.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)