

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684124

Luminaire Tested: **LX6C20D010 EX6C209050 6LBSH**

Issue Date: 2/15/2022

Test Information

Test Method: LM-79-08
Report Number: P684124
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P204188)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C20D010 EX6C209050 6LBSH
Description: 6 INCH 2000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 6LBS TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2198.0 lumens
Efficiency: N/A
Efficacy: 100.8 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 21.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P684124
CATALOG NUMBER: LX6C20D010 EX6C209050 6LBSH

Luminous Intensity Polar Plot

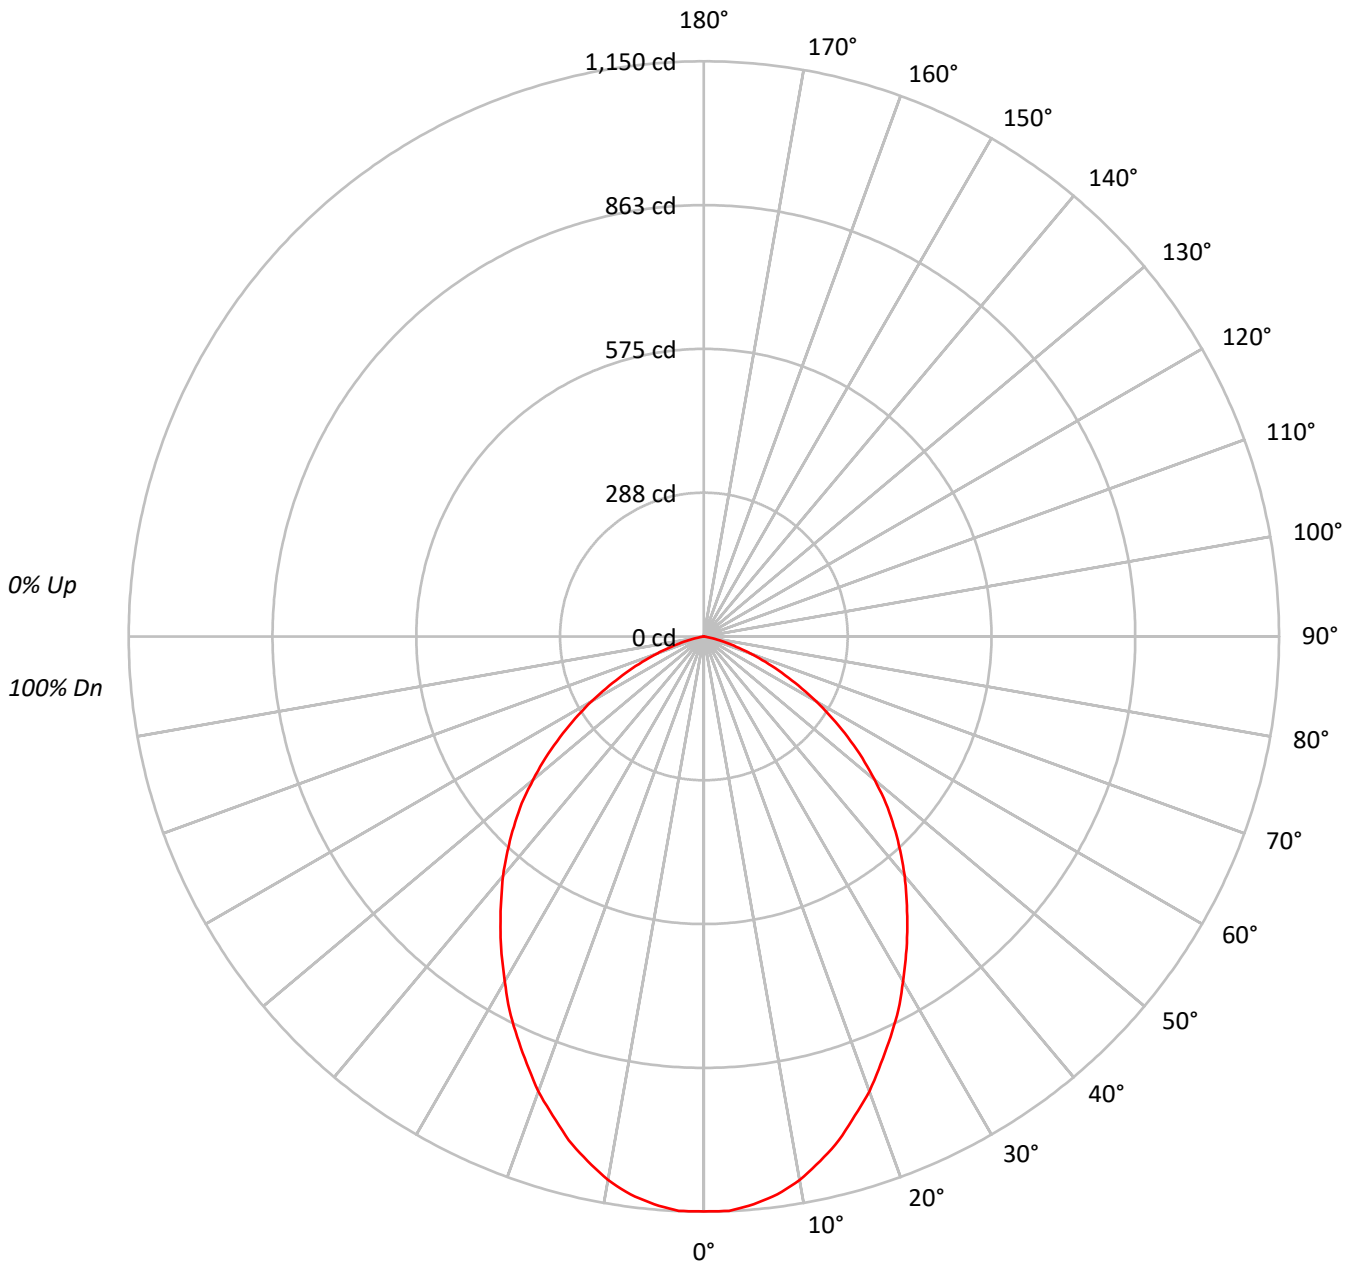



TEST NUMBER: P684124

CATALOG NUMBER: LX6C20D010 EX6C209050 6LBSH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	63021
5°	62723
10°	61433
15°	59194
20°	56472
25°	53428
30°	50400
35°	47455
40°	44684
45°	41655
50°	37977
55°	33538
60°	28386
65°	22285
70°	15900
75°	8705
80°	1547
85°	0



TEST NUMBER: P684124

CATALOG NUMBER: LX6C20D010 EX6C209050 6LBSH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.7	4.9
10°-20°	292.7	13.3
20°-30°	406.4	18.5
30°-40°	443.5	20.2
40°-50°	413.7	18.8
50°-60°	314.0	14.3
60°-70°	171.9	7.8
70°-80°	47.3	2.2
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	806.8	36.7
0°-40°	1250.3	56.9
0°-60°	1978.0	90.0
0°-90°	2198.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2198.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1150	
5°	1140	108
15°	1043	293
25°	883	406
35°	709	444
45°	537	414
55°	351	314
65°	172	172
75°	41	47
85°	0	1
90°	0	



TEST NUMBER: P684124

CATALOG NUMBER: LX6C20D010 EX6C209050 6LBSH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1149.6
2.5°	1149.6
5°	1139.8
7.5°	1125.3
10°	1103.6
12.5°	1074.5
15°	1043.0
17.5°	1004.3
20°	968.0
22.5°	924.5
25°	883.3
27.5°	842.2
30°	796.2
32.5°	752.6
35°	709.1
37.5°	665.5
40°	624.4
42.5°	580.8
45°	537.3
47.5°	493.7
50°	445.3
52.5°	399.3
55°	350.9
57.5°	304.9
60°	258.9
62.5°	213.0
65°	171.8
67.5°	133.1
70°	99.2
72.5°	67.8
75°	41.1
77.5°	19.4
80°	4.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)