

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856618

Luminaire Tested: **LD6C25D010 EU6259027 6LBWLI**

Issue Date: 2/15/2022



Test Information

Test Method: LM-79-08
Report Number: P856618
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205209)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD6C25D010 EU6259027 6LBWLI
Description: 6 INCH 2500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS
AND 6LBW TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2486.0 lumens
Efficiency: N/A
Efficacy: 78.9 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 31.5
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P856618

CATALOG NUMBER: LD6C25D010 EU6259027 6LBWLI

Luminous Intensity Polar Plot

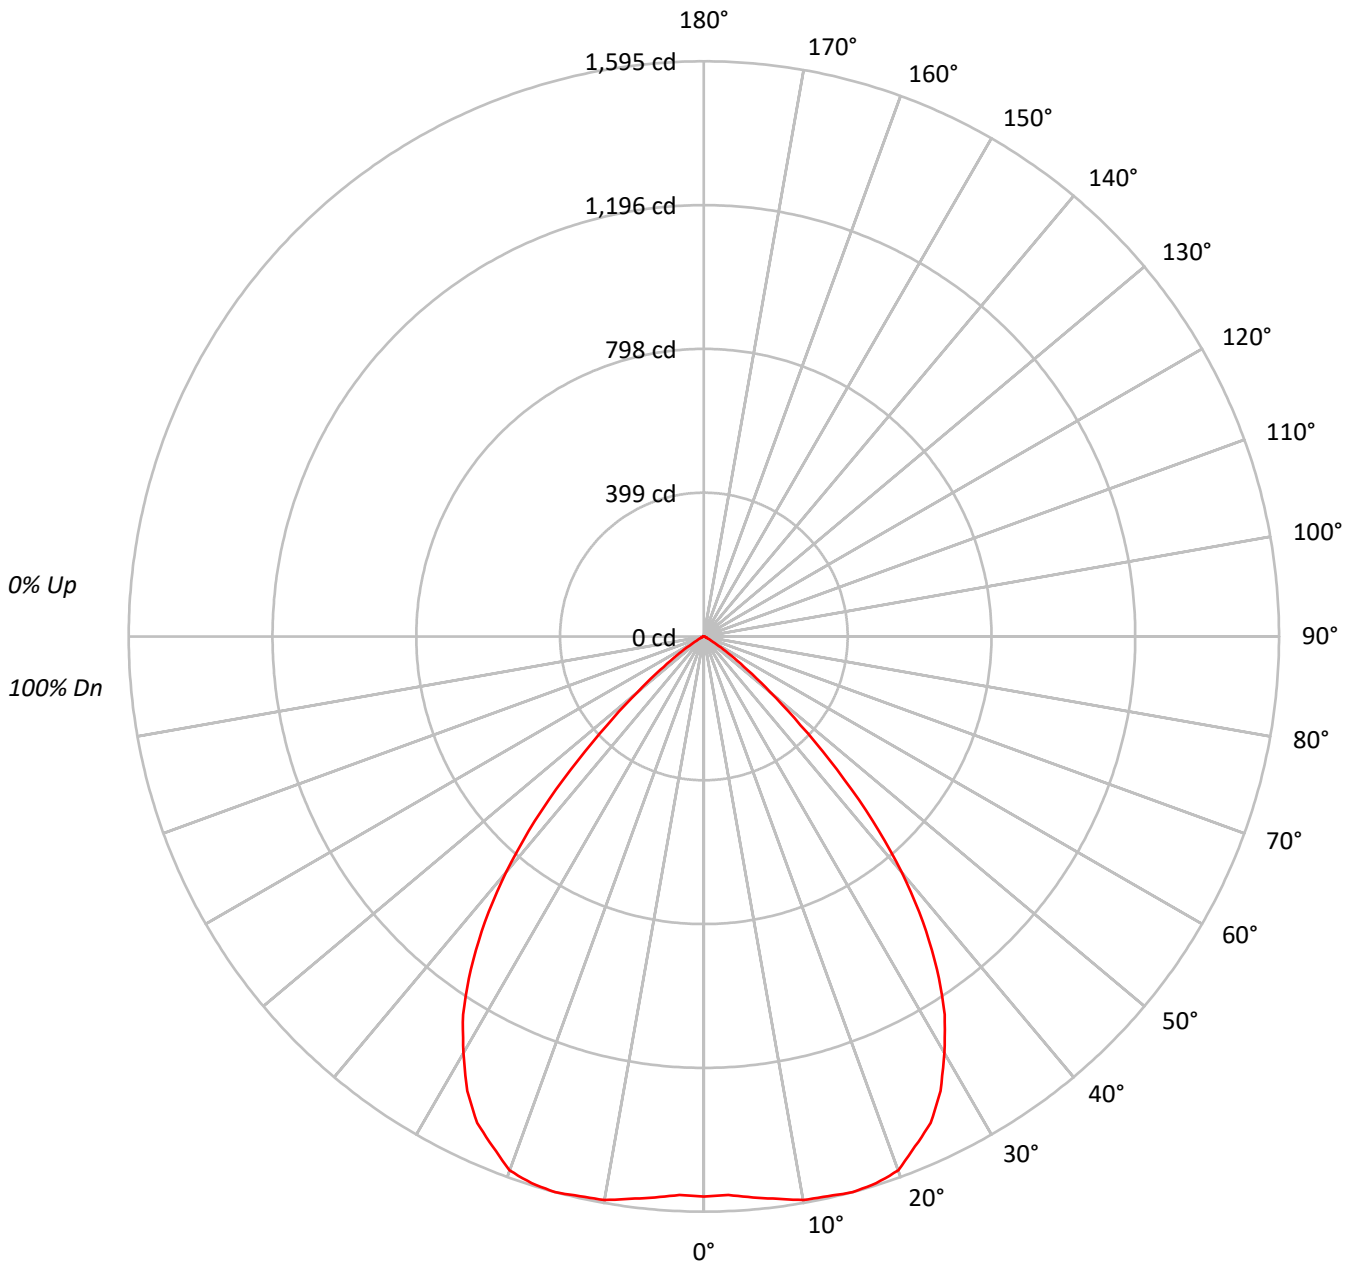



TEST NUMBER: P856618

CATALOG NUMBER: LD6C25D010 EU6259027 6LBWLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 113 | 110 | 107 | 104 | 110 | 107 | 105 | 103 | 103 | 101 | 99 | 100 | 98 | 97 | 96 | 95 | 94 | 92 | 92 | 92 | 92 |
| 2 | 106 | 101 | 96 | 92 | 104 | 99 | 95 | 91 | 95 | 92 | 89 | 92 | 90 | 87 | 90 | 87 | 85 | 83 | 83 | 83 | 83 |
| 3 | 100 | 92 | 87 | 82 | 97 | 91 | 86 | 81 | 88 | 84 | 80 | 86 | 82 | 79 | 83 | 80 | 77 | 76 | 76 | 76 | 76 |
| 4 | 93 | 85 | 78 | 74 | 92 | 84 | 78 | 73 | 81 | 76 | 72 | 79 | 75 | 71 | 77 | 74 | 70 | 69 | 69 | 69 | 69 |
| 5 | 88 | 78 | 71 | 66 | 86 | 77 | 71 | 66 | 75 | 70 | 65 | 73 | 69 | 65 | 72 | 68 | 64 | 63 | 63 | 63 | 63 |
| 6 | 82 | 72 | 65 | 60 | 81 | 71 | 65 | 60 | 70 | 64 | 59 | 68 | 63 | 59 | 67 | 62 | 59 | 57 | 57 | 57 | 57 |
| 7 | 77 | 67 | 60 | 55 | 76 | 66 | 59 | 55 | 65 | 59 | 54 | 63 | 58 | 54 | 62 | 57 | 54 | 52 | 52 | 52 | 52 |
| 8 | 73 | 62 | 55 | 50 | 71 | 61 | 55 | 50 | 60 | 54 | 50 | 59 | 54 | 50 | 58 | 53 | 49 | 48 | 48 | 48 | 48 |
| 9 | 69 | 57 | 51 | 46 | 67 | 57 | 50 | 46 | 56 | 50 | 46 | 55 | 50 | 46 | 54 | 49 | 46 | 44 | 44 | 44 | 44 |
| 10 | 65 | 54 | 47 | 43 | 64 | 53 | 47 | 43 | 52 | 46 | 42 | 51 | 46 | 42 | 51 | 46 | 42 | 41 | 41 | 41 | 41 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|-------|
| | 0° |
| 0° | 85141 |
| 5° | 85929 |
| 10° | 88331 |
| 15° | 90540 |
| 20° | 91918 |
| 25° | 90017 |
| 30° | 84393 |
| 35° | 75456 |
| 40° | 61115 |
| 45° | 40431 |
| 50° | 20434 |
| 55° | 8621 |
| 60° | 2774 |
| 65° | 1090 |
| 70° | 914 |
| 75° | 593 |
| 80° | 0 |
| 85° | 0 |



TEST NUMBER: P856618

CATALOG NUMBER: LD6C25D010 EU6259027 6LBWLI

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 149.8 | 6.0 |
| 10°-20° | 450.3 | 18.1 |
| 20°-30° | 678.8 | 27.3 |
| 30°-40° | 694.8 | 27.9 |
| 40°-50° | 404.8 | 16.3 |
| 50°-60° | 93.0 | 3.7 |
| 60°-70° | 11.4 | 0.5 |
| 70°-80° | 3.0 | 0.1 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1279.0 | 51.4 |
| 0°-40° | 1973.8 | 79.4 |
| 0°-60° | 2471.6 | 99.4 |
| 0°-90° | 2486.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 2486.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 1553 | |
| 5° | 1562 | 150 |
| 15° | 1595 | 450 |
| 25° | 1488 | 679 |
| 35° | 1128 | 695 |
| 45° | 522 | 405 |
| 55° | 90 | 93 |
| 65° | 8 | 11 |
| 75° | 3 | 3 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P856618

CATALOG NUMBER: LD6C25D010 EU6259027 6LBWLI

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 1553.1 |
| 2.5° | 1550.2 |
| 5° | 1561.5 |
| 7.5° | 1572.7 |
| 10° | 1586.8 |
| 12.5° | 1589.7 |
| 15° | 1595.3 |
| 17.5° | 1589.7 |
| 20° | 1575.6 |
| 22.5° | 1530.5 |
| 25° | 1488.2 |
| 27.5° | 1420.6 |
| 30° | 1333.2 |
| 32.5° | 1243.0 |
| 35° | 1127.5 |
| 37.5° | 997.7 |
| 40° | 854.0 |
| 42.5° | 693.4 |
| 45° | 521.5 |
| 47.5° | 363.6 |
| 50° | 239.6 |
| 52.5° | 152.2 |
| 55° | 90.2 |
| 57.5° | 47.9 |
| 60° | 25.3 |
| 62.5° | 14.1 |
| 65° | 8.4 |
| 67.5° | 8.4 |
| 70° | 5.7 |
| 72.5° | 2.8 |
| 75° | 2.8 |
| 77.5° | 2.8 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)