

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684160

Luminaire Tested: **LX6C25D010 EX6C259050 6LBMDH**

Issue Date: 2/15/2022



Test Information

Test Method: LM-79-08
Report Number: P684160
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-21)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C25D010 EX6C259050 6LBMDH
Description: 6 INCH 2500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 6LRMD45 TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1917.0 lumens
Efficiency: N/A
Efficacy: 60.9 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.8
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 31.5
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P684160
CATALOG NUMBER: LX6C25D010 EX6C259050 6LBMDH

Luminous Intensity Polar Plot

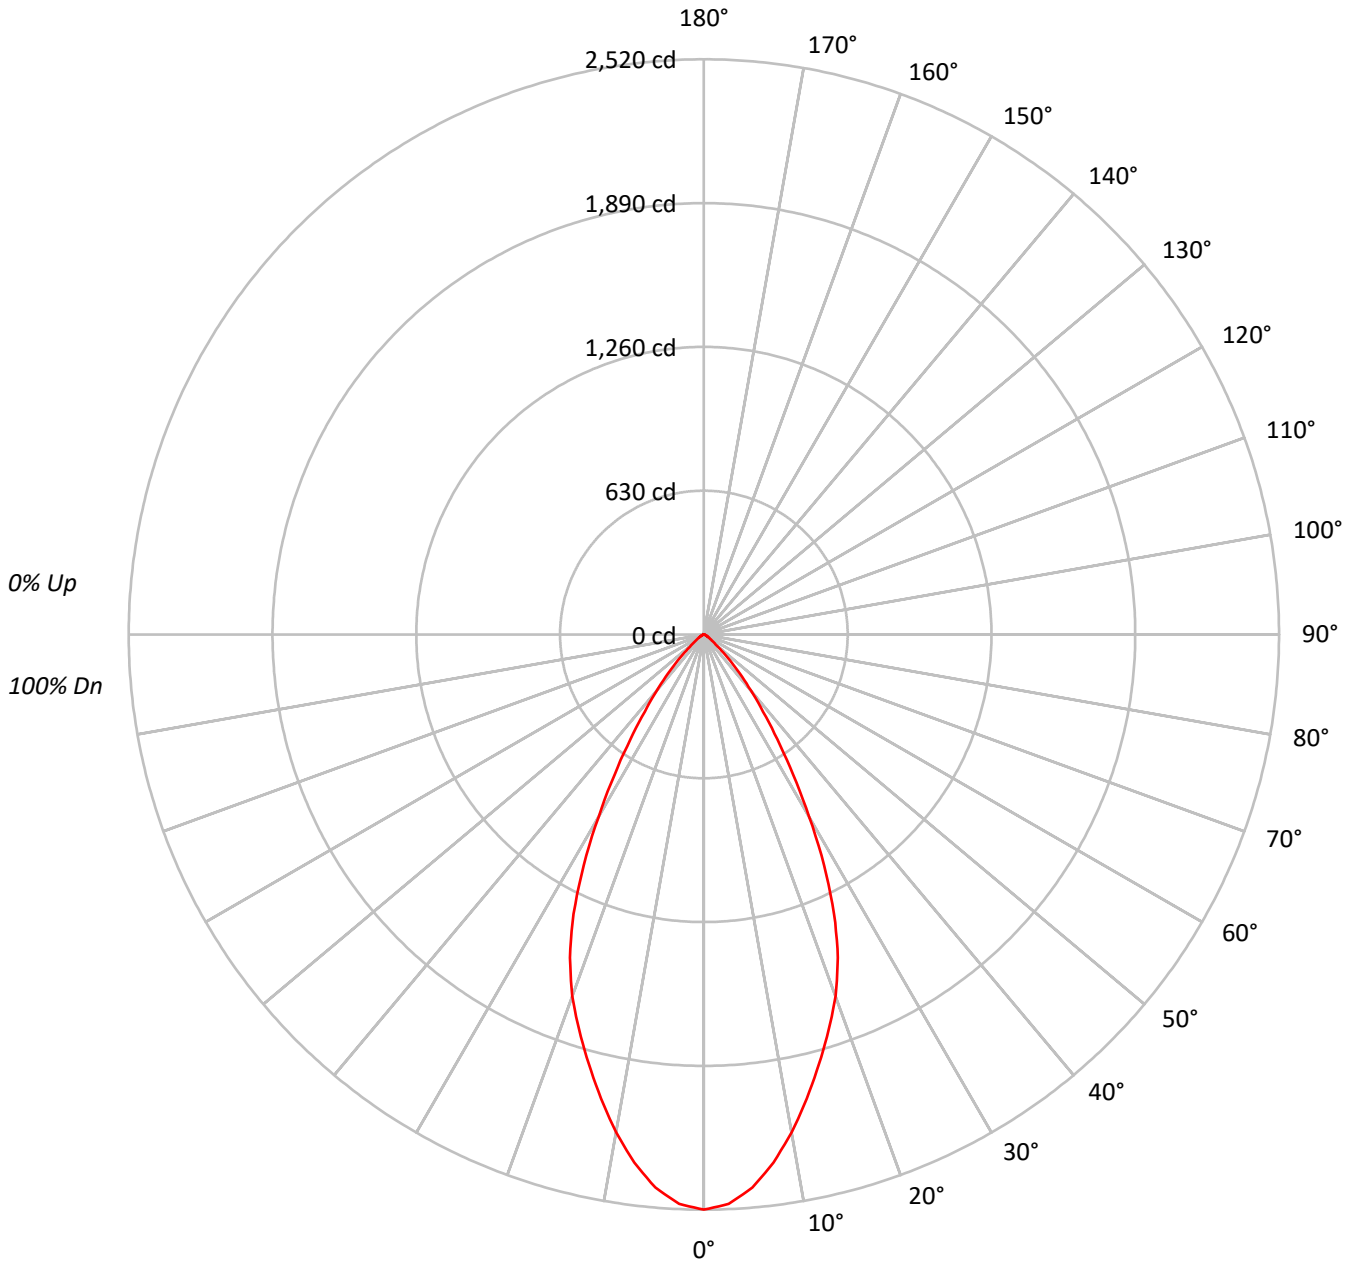



TEST NUMBER: P684160

CATALOG NUMBER: LX6C25D010 EX6C259050 6LBMDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	80	86	82	79	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62			
8	80	70	64	60	78	70	64	60	68	63	60	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54			
10	72	63	57	53	71	62	57	53	62	56	53	61	56	53	60	56	53	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	138125
5°	133854
10°	123255
15°	110551
20°	98364
25°	81682
30°	58357
35°	37510
40°	22857
45°	12707
50°	5629
55°	3259
60°	2149
65°	1518
70°	1074
75°	826
80°	537
85°	377



TEST NUMBER: P684160

CATALOG NUMBER: LX6C25D010 EX6C259050 6LBMDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	225.1	11.7
10°-20°	545.0	28.4
20°-30°	606.1	31.6
30°-40°	359.1	18.7
40°-50°	131.6	6.9
50°-60°	33.0	1.7
60°-70°	12.1	0.6
70°-80°	4.2	0.2
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1376.2	71.8
0°-40°	1735.3	90.5
0°-60°	1899.9	99.1
0°-90°	1917.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1917.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2520	
5°	2432	225
15°	1948	545
25°	1350	606
35°	560	359
45°	164	132
55°	34	33
65°	12	12
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P684160

CATALOG NUMBER: LX6C25D010 EX6C259050 6LBMDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2519.6
2.5°	2497.2
5°	2432.4
7.5°	2333.9
10°	2214.2
12.5°	2082.2
15°	1947.9
17.5°	1817.6
20°	1686.1
22.5°	1533.4
25°	1350.4
27.5°	1140.1
30°	921.9
32.5°	726.7
35°	560.5
37.5°	425.7
40°	319.4
42.5°	232.7
45°	163.9
47.5°	104.1
50°	66.0
52.5°	46.4
55°	34.1
57.5°	25.7
60°	19.6
62.5°	15.1
65°	11.7
67.5°	9.0
70°	6.7
72.5°	5.0
75°	3.9
77.5°	2.8
80°	1.7
82.5°	1.1
85°	0.6
87.5°	0.6
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)