

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684163

Luminaire Tested: **LX6C25D010 EX6C259050 6LBSH**

Issue Date: 2/15/2022



Test Information

Test Method: LM-79-08
Report Number: P684163
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P204188)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C25D010 EX6C259050 6LBSH
Description: 6 INCH 2500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 6LBS TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2761.0 lumens
Efficiency: N/A
Efficacy: 87.7 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 31.5
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P684163

CATALOG NUMBER: LX6C25D010 EX6C259050 6LBSH

Luminous Intensity Polar Plot

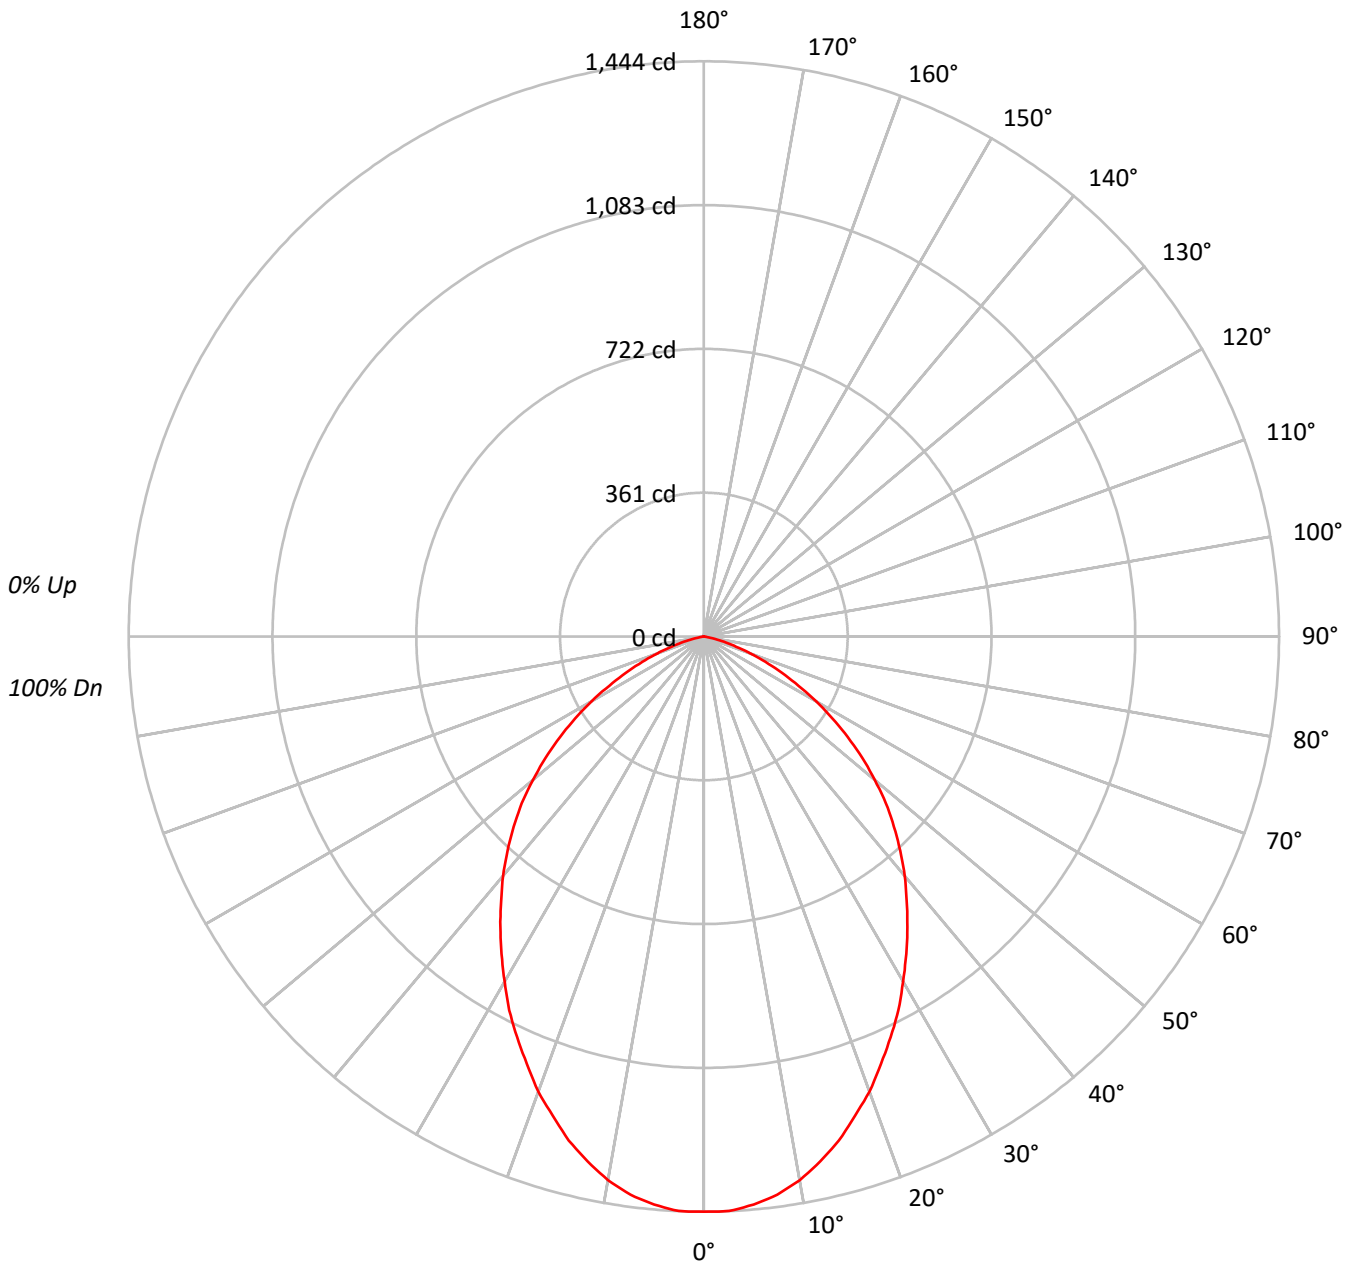



TEST NUMBER: P684163

CATALOG NUMBER: LX6C25D010 EX6C259050 6LBSH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	79160
5°	78791
10°	77164
15°	74359
20°	70940
25°	67117
30°	63307
35°	59608
40°	56127
45°	52323
50°	47708
55°	42130
60°	35666
65°	28006
70°	19987
75°	10951
80°	1926
85°	0



TEST NUMBER: P684163

CATALOG NUMBER: LX6C25D010 EX6C259050 6LBSH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	135.3	4.9
10°-20°	367.6	13.3
20°-30°	510.5	18.5
30°-40°	557.1	20.2
40°-50°	519.7	18.8
50°-60°	394.5	14.3
60°-70°	216.0	7.8
70°-80°	59.4	2.2
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1013.4	36.7
0°-40°	1570.5	56.9
0°-60°	2484.7	90.0
0°-90°	2761.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2761.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1444	
5°	1432	135
15°	1310	368
25°	1110	511
35°	891	557
45°	675	520
55°	441	394
65°	216	216
75°	52	59
85°	0	1
90°	0	



TEST NUMBER: P684163

CATALOG NUMBER: LX6C25D010 EX6C259050 6LBSH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1444.0
2.5°	1444.0
5°	1431.8
7.5°	1413.6
10°	1386.2
12.5°	1349.7
15°	1310.2
17.5°	1261.6
20°	1216.0
22.5°	1161.3
25°	1109.6
27.5°	1057.9
30°	1000.1
32.5°	945.4
35°	890.7
37.5°	836.0
40°	784.3
42.5°	729.6
45°	674.9
47.5°	620.1
50°	559.4
52.5°	501.6
55°	440.8
57.5°	383.0
60°	325.3
62.5°	267.5
65°	215.9
67.5°	167.2
70°	124.7
72.5°	85.1
75°	51.7
77.5°	24.3
80°	6.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)