

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684956

Luminaire Tested: **LX6C30D010 EX6309040 6LRMDLI**

Issue Date: 2/15/2022

Test Information

Test Method: LM-79-08
Report Number: P684956
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-20)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C30D010 EX6309040 6LRMDLI
Description: 6 INCH 3000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS
AND 6LRMD45 TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2288.0 lumens
Efficiency: N/A
Efficacy: 72.4 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 31.6
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P684956

CATALOG NUMBER: LX6C30D010 EX6309040 6LRMDLI

Luminous Intensity Polar Plot

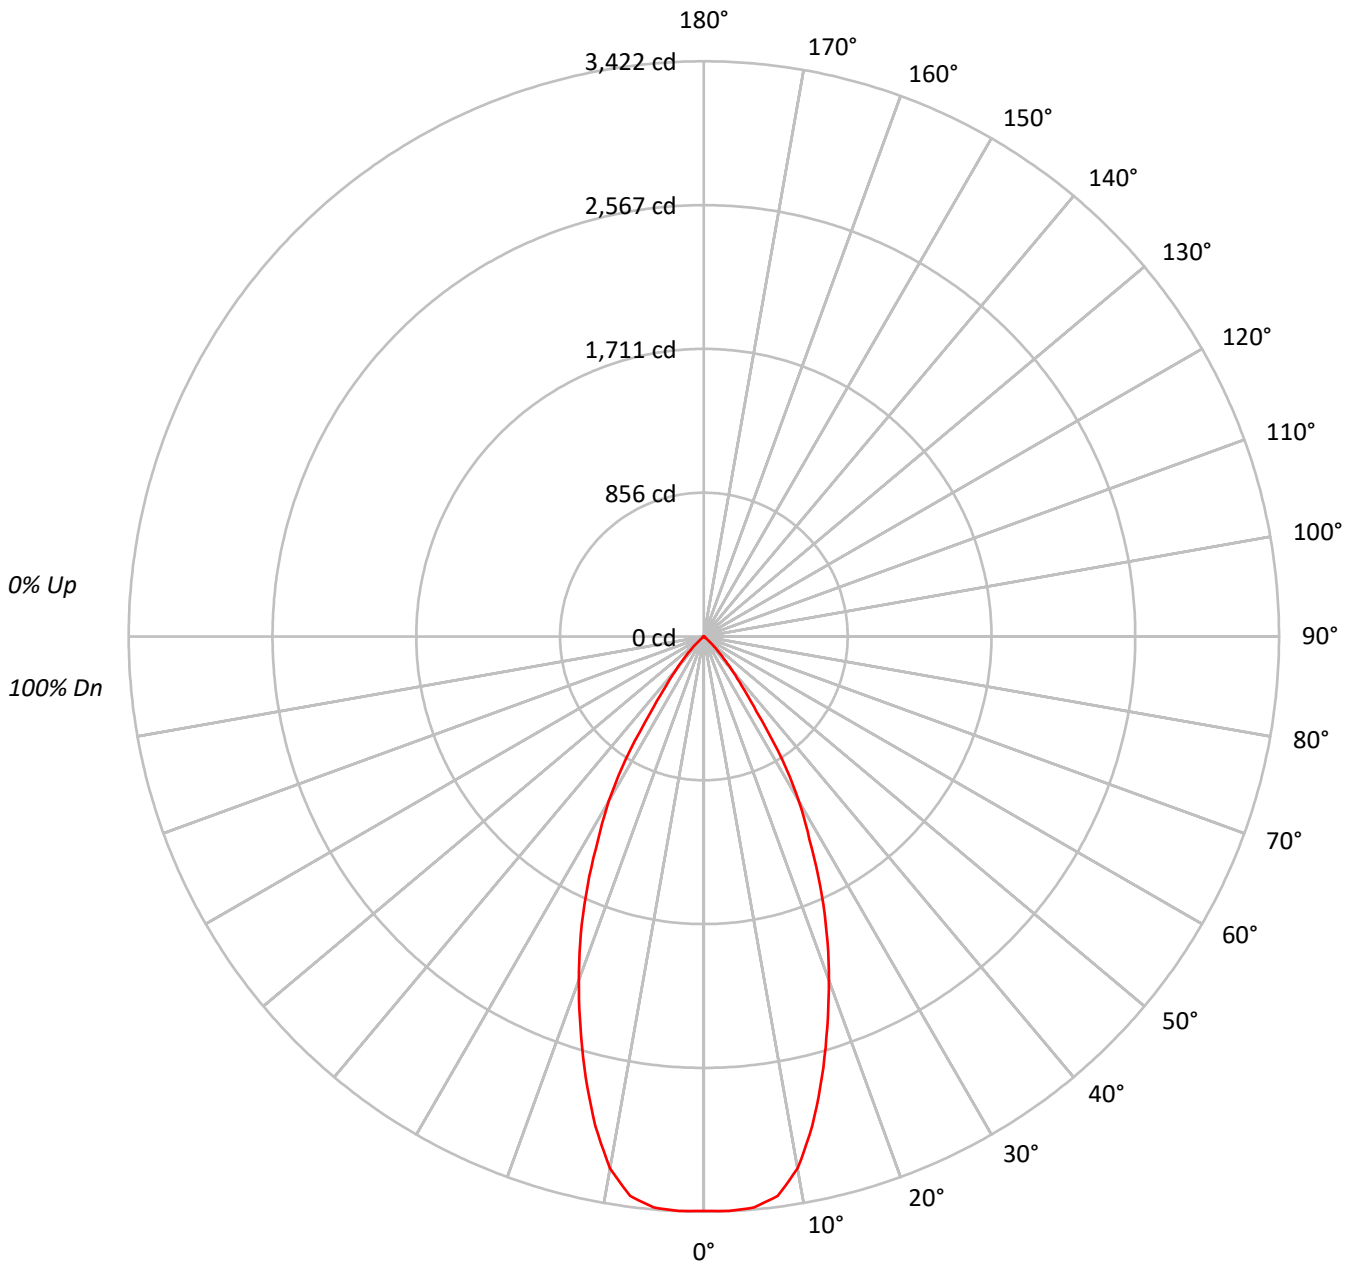



TEST NUMBER: P684956

CATALOG NUMBER: LX6C30D010 EX6309040 6LRMDLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89			
3	104	98	93	90	102	97	92	89	94	90	87	92	89	86	89	87	85	83			
4	99	92	87	83	97	91	86	83	89	85	82	87	83	81	85	82	80	78			
5	95	87	81	77	93	86	81	77	84	80	76	83	79	76	81	78	75	74			
6	90	82	77	73	89	81	76	72	80	75	72	79	74	71	77	74	71	70			
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	74	70	67	66			
8	83	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62			
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59			
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	187342
5°	187700
10°	178882
15°	154025
20°	126886
25°	99109
30°	71574
35°	36654
40°	17876
45°	7427
50°	1356
55°	784
60°	515
65°	376
70°	289
75°	254
80°	189
85°	0



TEST NUMBER: P684956

CATALOG NUMBER: LX6C30D010 EX6309040 6LRMDLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	319.7	14.0
10°-20°	752.2	32.9
20°-30°	745.0	32.6
30°-40°	377.7	16.5
40°-50°	81.4	3.6
50°-60°	7.8	0.3
60°-70°	3.0	0.1
70°-80°	1.1	0.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1816.9	79.4
0°-40°	2194.6	95.9
0°-60°	2283.7	99.8
0°-90°	2288.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2288.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3417	
5°	3411	320
15°	2714	752
25°	1638	745
35°	548	378
45°	96	81
55°	8	8
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P684956

CATALOG NUMBER: LX6C30D010 EX6309040 6LRMDLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3417.4
2.5°	3421.5
5°	3410.9
7.5°	3357.5
10°	3213.5
12.5°	2981.9
15°	2713.9
17.5°	2439.5
20°	2175.0
22.5°	1910.6
25°	1638.5
27.5°	1361.1
30°	1130.7
32.5°	871.0
35°	547.7
37.5°	368.5
40°	249.8
42.5°	161.6
45°	95.8
47.5°	42.9
50°	15.9
52.5°	10.6
55°	8.2
57.5°	5.9
60°	4.7
62.5°	3.5
65°	2.9
67.5°	2.4
70°	1.8
72.5°	1.2
75°	1.2
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)