

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684971

Luminaire Tested: **LX6C35D010 EX6359030 6LRMDLI**

Issue Date: 2/15/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P684971  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-20)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX6C35D010 EX6359030 6LRMDLI  
Description: 6 INCH 3500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS  
AND 6LRMD45 TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2659.0 lumens  
Efficiency: N/A  
Efficacy: 65.8 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 40.4  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P684971

CATALOG NUMBER: LX6C35D010 EX6359030 6LRMDLI

### Luminous Intensity Polar Plot

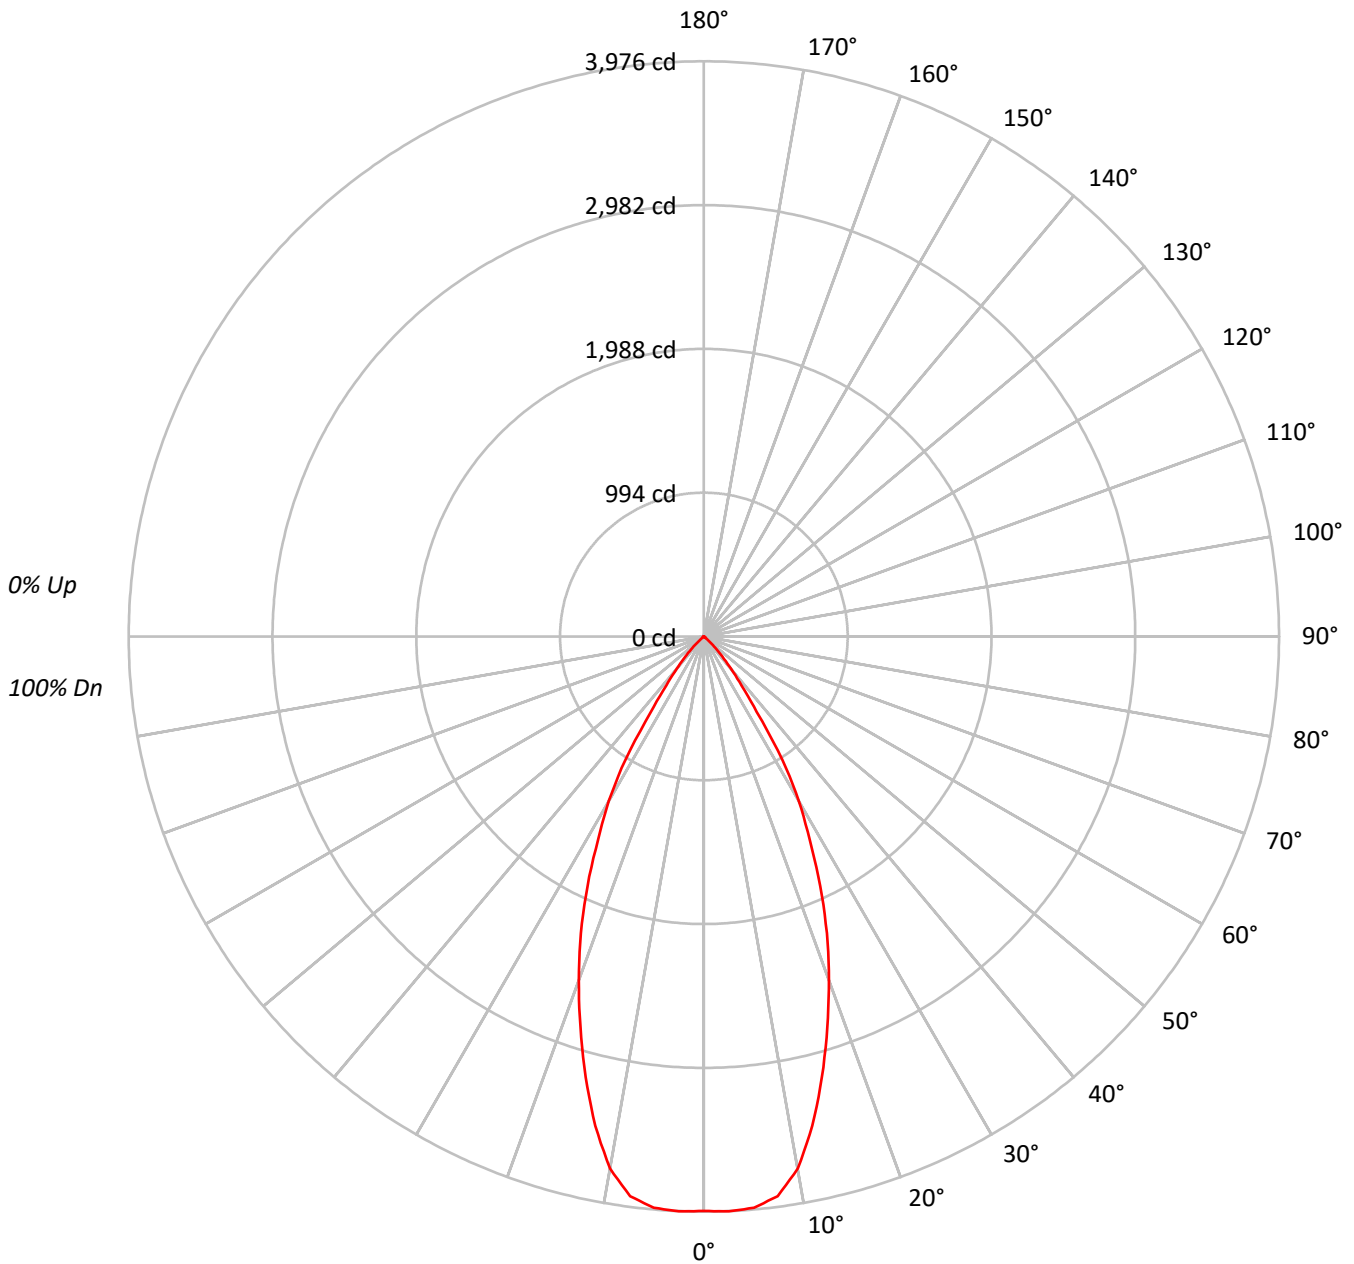



TEST NUMBER: P684971

CATALOG NUMBER: LX6C35D010 EX6359030 6LRMDLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 114 | 111 | 109 | 107 | 111 | 109 | 107 | 105 | 105 | 103 | 102 | 101 | 100 | 99  | 98  | 97  | 96  | 94  |    |    |   |
| 2   | 109 | 104 | 100 | 97  | 107 | 103 | 99  | 96  | 99  | 97  | 94  | 96  | 94  | 92  | 94  | 92  | 90  | 89  |    |    |   |
| 3   | 104 | 98  | 93  | 90  | 102 | 97  | 92  | 89  | 94  | 90  | 87  | 92  | 89  | 86  | 89  | 87  | 85  | 83  |    |    |   |
| 4   | 99  | 92  | 87  | 83  | 97  | 91  | 86  | 83  | 89  | 85  | 82  | 87  | 83  | 81  | 85  | 82  | 80  | 78  |    |    |   |
| 5   | 95  | 87  | 81  | 77  | 93  | 86  | 81  | 77  | 84  | 80  | 76  | 83  | 79  | 76  | 81  | 78  | 75  | 74  |    |    |   |
| 6   | 90  | 82  | 77  | 73  | 89  | 81  | 76  | 72  | 80  | 75  | 72  | 79  | 74  | 71  | 77  | 74  | 71  | 70  |    |    |   |
| 7   | 86  | 78  | 72  | 68  | 85  | 77  | 72  | 68  | 76  | 71  | 68  | 75  | 70  | 67  | 74  | 70  | 67  | 66  |    |    |   |
| 8   | 83  | 74  | 68  | 64  | 81  | 73  | 68  | 64  | 72  | 67  | 64  | 71  | 67  | 64  | 70  | 66  | 63  | 62  |    |    |   |
| 9   | 79  | 70  | 65  | 61  | 78  | 70  | 64  | 61  | 69  | 64  | 61  | 68  | 63  | 60  | 67  | 63  | 60  | 59  |    |    |   |
| 10  | 76  | 67  | 61  | 58  | 75  | 66  | 61  | 58  | 65  | 61  | 57  | 65  | 60  | 57  | 64  | 60  | 57  | 56  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 217718 |
| 5°  | 218137 |
| 10° | 207884 |
| 15° | 179002 |
| 20° | 147462 |
| 25° | 115180 |
| 30° | 83184  |
| 35° | 42597  |
| 40° | 20775  |
| 45° | 8629   |
| 50° | 1569   |
| 55° | 918    |
| 60° | 603    |
| 65° | 441    |
| 70° | 321    |
| 75° | 297    |
| 80° | 221    |
| 85° | 0      |



TEST NUMBER: P684971

CATALOG NUMBER: LX6C35D010 EX6359030 6LRMDLI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 371.5  | 14.0      |
| 10°-20°   | 874.2  | 32.9      |
| 20°-30°   | 865.8  | 32.6      |
| 30°-40°   | 438.9  | 16.5      |
| 40°-50°   | 94.6   | 3.6       |
| 50°-60°   | 9.0    | 0.3       |
| 60°-70°   | 3.4    | 0.1       |
| 70°-80°   | 1.3    | 0.0       |
| 80°-90°   | 0.3    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 2111.5 | 79.4      |
| 0°-40°    | 2550.4 | 95.9      |
| 0°-60°    | 2654.0 | 99.8      |
| 0°-90°    | 2659.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 2659.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 3972 |      |
| 5°  | 3964 | 372  |
| 15° | 3154 | 874  |
| 25° | 1904 | 866  |
| 35° | 636  | 439  |
| 45° | 111  | 95   |
| 55° | 10   | 9    |
| 65° | 3    | 3    |
| 75° | 1    | 1    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P684971

CATALOG NUMBER: LX6C35D010 EX6359030 6LRMDLI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 3971.5 |
| 2.5°  | 3976.3 |
| 5°    | 3964.0 |
| 7.5°  | 3901.9 |
| 10°   | 3734.5 |
| 12.5° | 3465.5 |
| 15°   | 3154.0 |
| 17.5° | 2835.1 |
| 20°   | 2527.7 |
| 22.5° | 2220.4 |
| 25°   | 1904.2 |
| 27.5° | 1581.8 |
| 30°   | 1314.1 |
| 32.5° | 1012.2 |
| 35°   | 636.5  |
| 37.5° | 428.2  |
| 40°   | 290.3  |
| 42.5° | 187.8  |
| 45°   | 111.3  |
| 47.5° | 49.9   |
| 50°   | 18.4   |
| 52.5° | 12.3   |
| 55°   | 9.6    |
| 57.5° | 6.8    |
| 60°   | 5.5    |
| 62.5° | 4.1    |
| 65°   | 3.4    |
| 67.5° | 2.7    |
| 70°   | 2.0    |
| 72.5° | 1.4    |
| 75°   | 1.4    |
| 77.5° | 0.7    |
| 80°   | 0.7    |
| 82.5° | 0.7    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)