

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684228

Luminaire Tested: **LX6C35D010 EX6C359035 6LBWH**

Issue Date: 2/15/2022

Test Information

Test Method: LM-79-08
Report Number: P684228
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P202739)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C35D010 EX6C359035 6LBWH
Description: 6 INCH 3500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS
AND 6LBW TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3179.0 lumens
Efficiency: N/A
Efficacy: 78.7 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P684228

CATALOG NUMBER: LX6C35D010 EX6C359035 6LBWH

Luminous Intensity Polar Plot

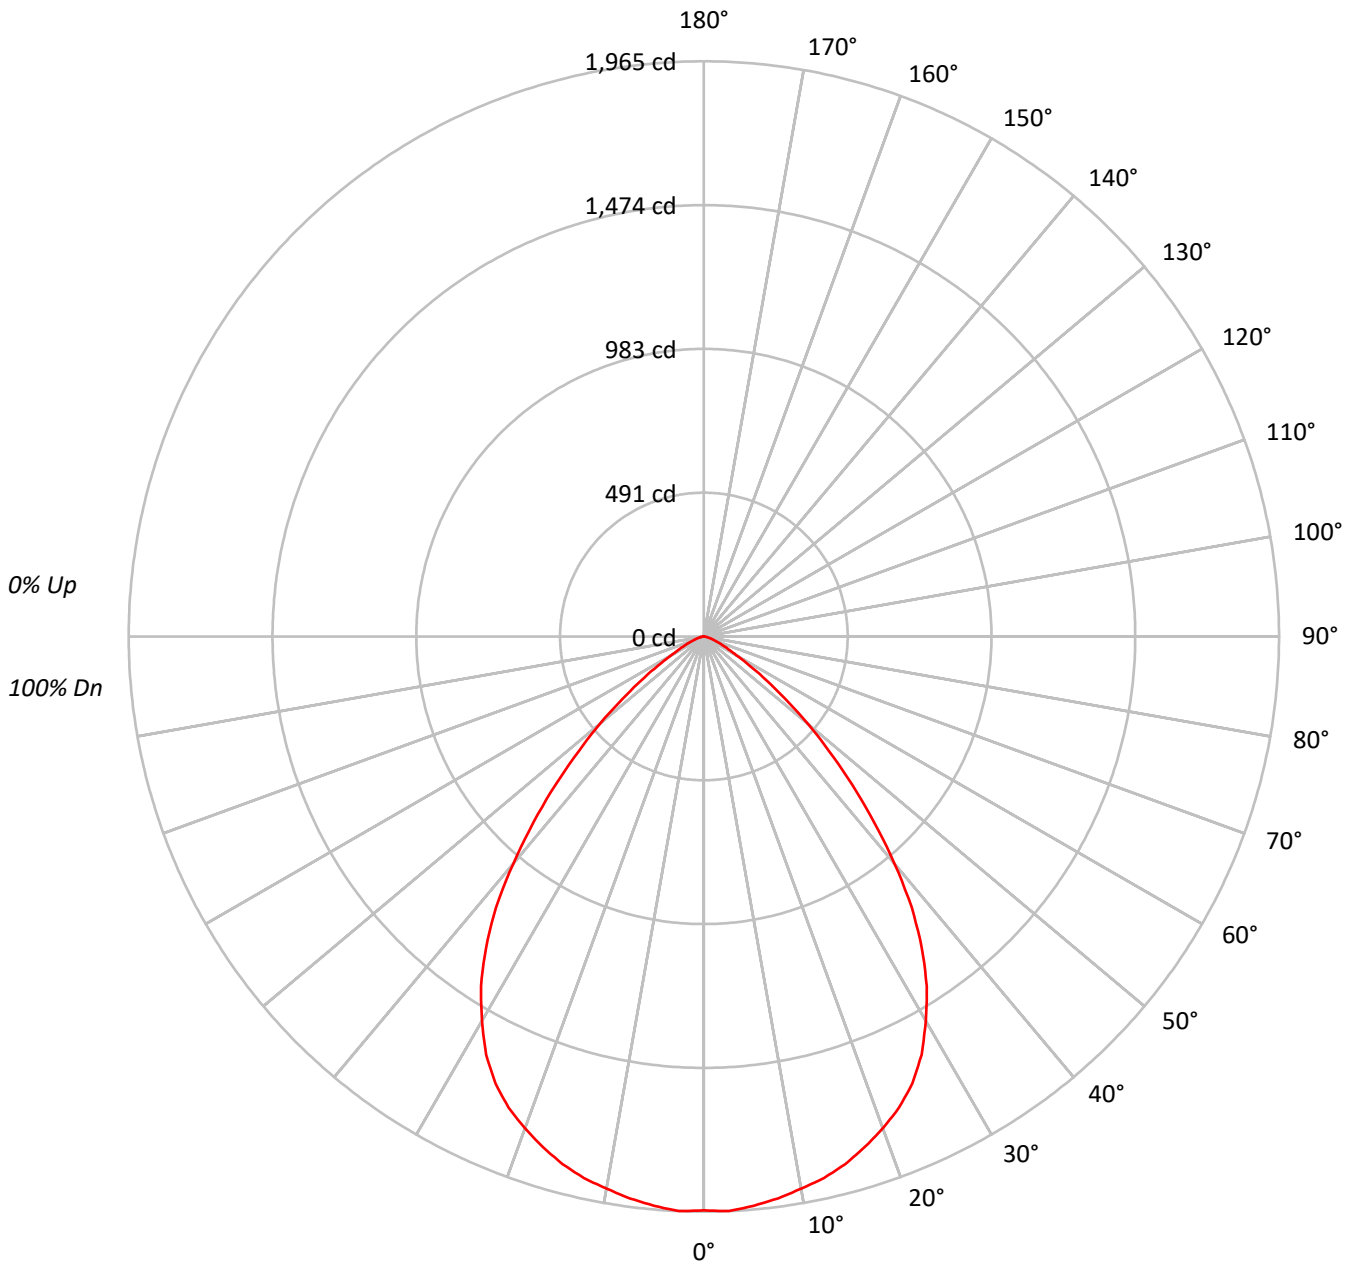



TEST NUMBER: P684228

CATALOG NUMBER: LX6C35D010 EX6C359035 6LBWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			73
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			65
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			59
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			53
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			49
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			41
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	107486
5°	107445
10°	106622
15°	105909
20°	104292
25°	101909
30°	95958
35°	86839
40°	72514
45°	55564
50°	39351
55°	24812
60°	13990
65°	9080
70°	5930
75°	4363
80°	2620
85°	2579



TEST NUMBER: P684228

CATALOG NUMBER: LX6C35D010 EX6C359035 6LBWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	185.2	5.8
10°-20°	525.5	16.5
20°-30°	770.5	24.2
30°-40°	801.9	25.2
40°-50°	554.8	17.5
50°-60°	241.6	7.6
60°-70°	74.1	2.3
70°-80°	22.2	0.7
80°-90°	3.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1481.1	46.6
0°-40°	2283.0	71.8
0°-60°	3079.3	96.9
0°-90°	3179.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3179.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1961	
5°	1952	185
15°	1866	525
25°	1685	770
35°	1298	802
45°	717	555
55°	260	242
65°	70	74
75°	21	22
85°	4	3
90°	0	



TEST NUMBER: P684228

CATALOG NUMBER: LX6C35D010 EX6C359035 6LBWH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1960.7
2.5°	1964.8
5°	1952.5
7.5°	1936.1
10°	1915.4
12.5°	1894.8
15°	1866.1
17.5°	1828.9
20°	1787.7
22.5°	1742.4
25°	1684.8
27.5°	1610.6
30°	1515.9
32.5°	1417.0
35°	1297.6
37.5°	1165.8
40°	1013.3
42.5°	860.9
45°	716.7
47.5°	580.8
50°	461.4
52.5°	350.2
55°	259.6
57.5°	185.4
60°	127.6
62.5°	94.8
65°	70.0
67.5°	53.6
70°	37.0
72.5°	28.9
75°	20.6
77.5°	12.3
80°	8.3
82.5°	4.1
85°	4.1
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)