

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684238

Luminaire Tested: **LX6C35D010 EX6C359050 6LBMDH**

Issue Date: 2/15/2022

Test Information

Test Method: LM-79-08
Report Number: P684238
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-21)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C35D010 EX6C359050 6LBMDH
Description: 6 INCH 3500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 6LRMD45 TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2656.0 lumens
Efficiency: N/A
Efficacy: 65.7 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.8
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P684238

CATALOG NUMBER: LX6C35D010 EX6C359050 6LBMDH

Luminous Intensity Polar Plot

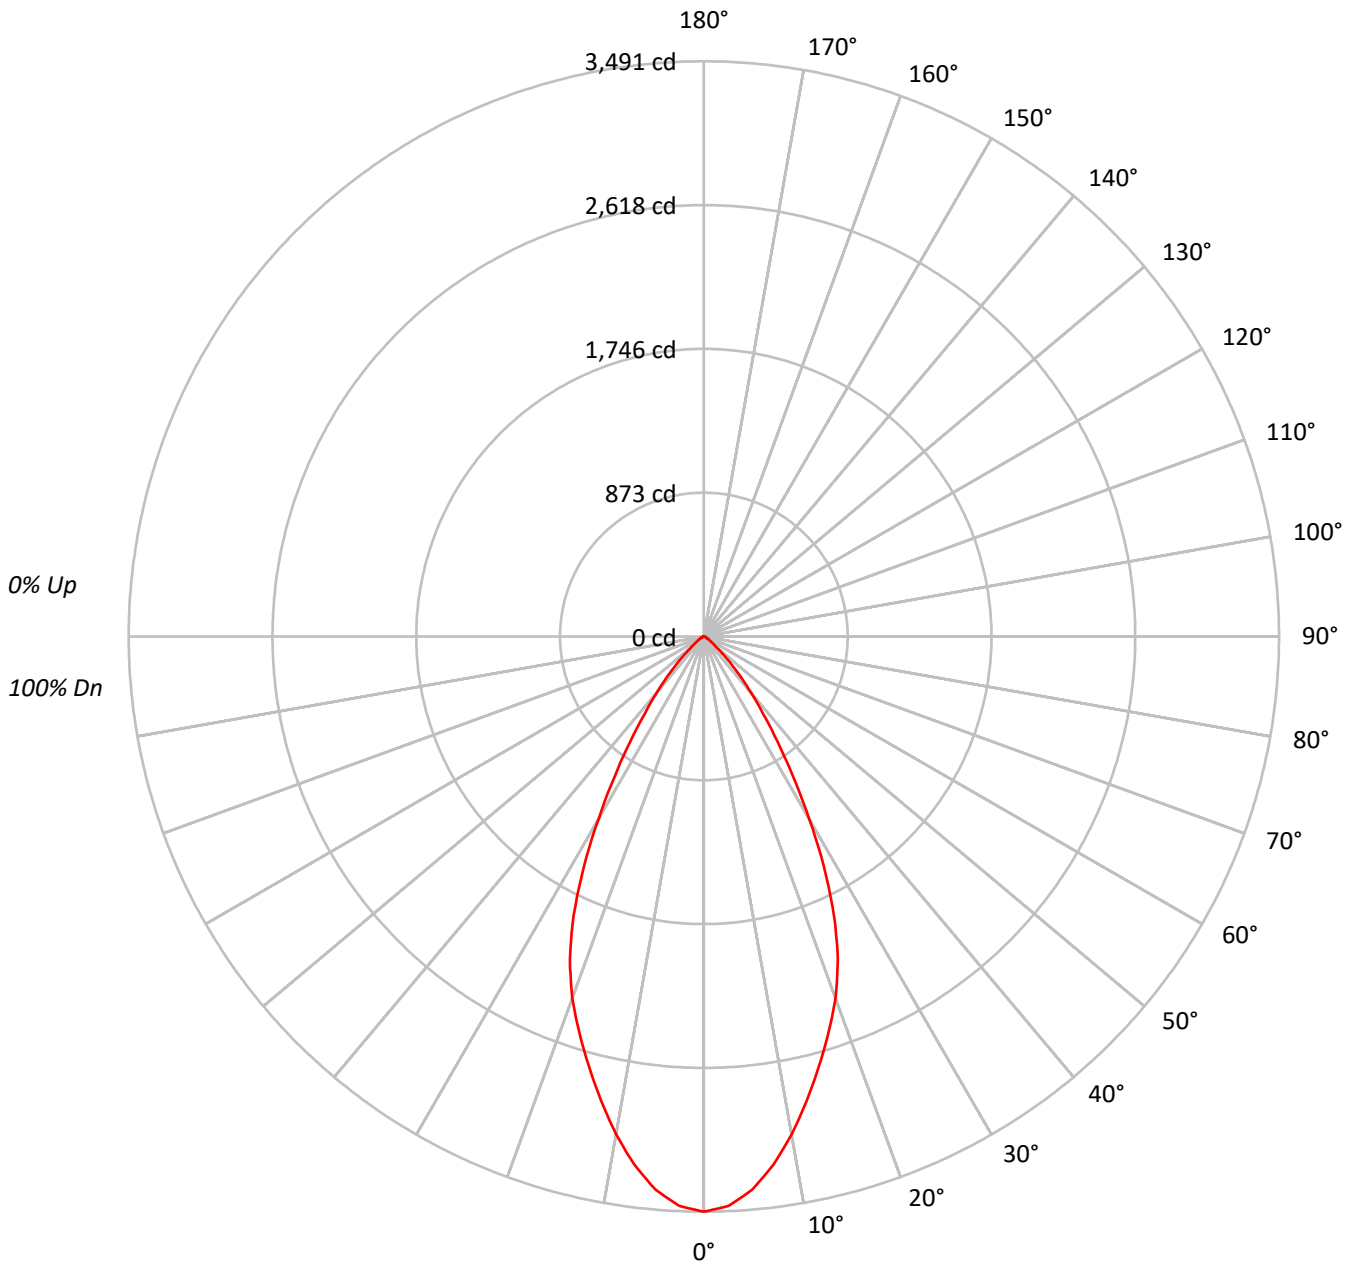



TEST NUMBER: P684238

CATALOG NUMBER: LX6C35D010 EX6C359050 6LBMDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	80	86	82	79	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62			
8	80	70	64	60	78	70	64	60	68	63	60	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54			
10	72	63	57	53	71	62	57	53	62	56	53	61	56	53	60	56	53	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	191372
5°	185450
10°	170766
15°	153168
20°	136284
25°	113172
30°	80854
35°	51972
40°	31674
45°	17606
50°	7804
55°	4521
60°	2971
65°	2114
70°	1491
75°	1144
80°	726
85°	503



TEST NUMBER: P684238

CATALOG NUMBER: LX6C35D010 EX6C359050 6LBMDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	311.9	11.7
10°-20°	755.1	28.4
20°-30°	839.7	31.6
30°-40°	497.5	18.7
40°-50°	182.3	6.9
50°-60°	45.8	1.7
60°-70°	16.7	0.6
70°-80°	5.8	0.2
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1906.7	71.8
0°-40°	2404.2	90.5
0°-60°	2632.3	99.1
0°-90°	2656.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2656.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3491	
5°	3370	312
15°	2699	755
25°	1871	840
35°	777	498
45°	227	182
55°	47	46
65°	16	17
75°	5	6
85°	1	1
90°	0	



TEST NUMBER: P684238

CATALOG NUMBER: LX6C35D010 EX6C359050 6LBMDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3490.9
2.5°	3459.9
5°	3370.0
7.5°	3233.6
10°	3067.7
12.5°	2884.8
15°	2698.8
17.5°	2518.2
20°	2336.1
22.5°	2124.5
25°	1871.0
27.5°	1579.6
30°	1277.3
32.5°	1006.8
35°	776.6
37.5°	589.8
40°	442.6
42.5°	322.4
45°	227.1
47.5°	144.2
50°	91.5
52.5°	64.3
55°	47.3
57.5°	35.7
60°	27.1
62.5°	20.9
65°	16.3
67.5°	12.4
70°	9.3
72.5°	7.0
75°	5.4
77.5°	3.9
80°	2.3
82.5°	1.6
85°	0.8
87.5°	0.8
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)