

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P563934

Luminaire Tested: **LX6C35D010 EX6C359030 6LBMDH**

Issue Date: 2/15/2022



Test Information

Test Method: LM-79-08
Report Number: P563934
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-21)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C35D010 EX6C359030 6LBMDH
Description: 6 INCH 3500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 6LRMD45 TRIM WITH H FINISH, DIM TO WARM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2563.0 lumens
Efficiency: N/A
Efficacy: 63.4 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.8
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P563934

CATALOG NUMBER: LX6C35D010 EX6C359030 6LBMDH

Luminous Intensity Polar Plot

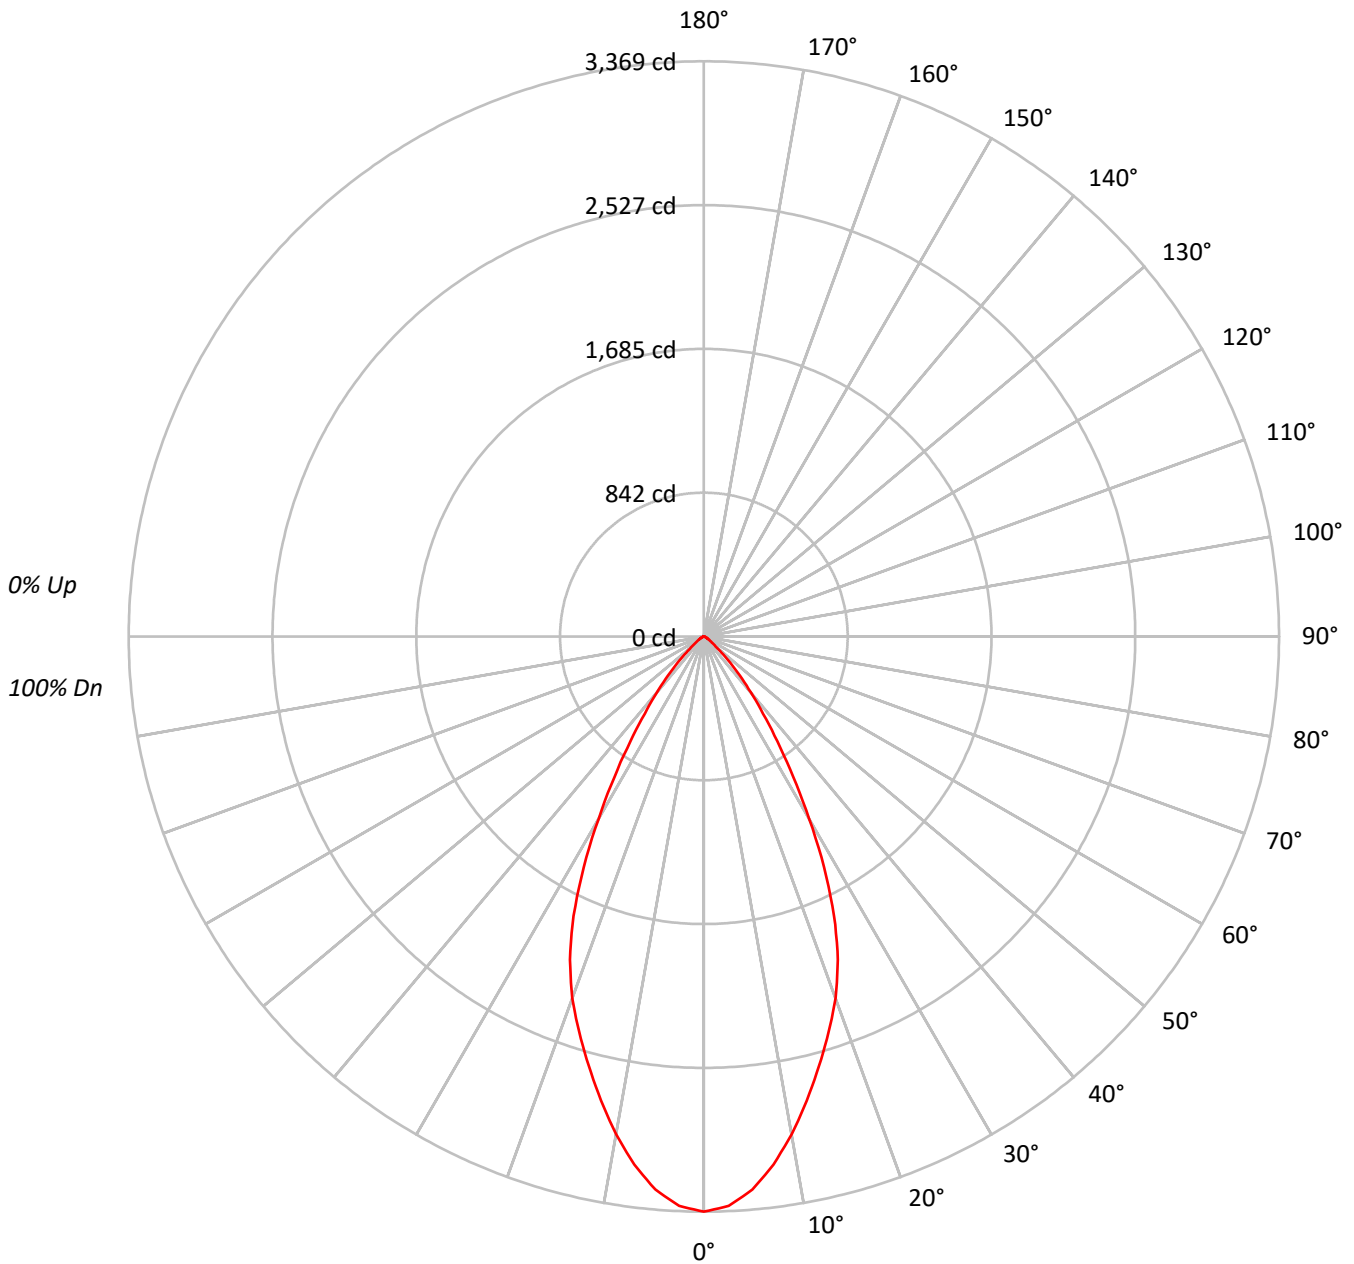



TEST NUMBER: P563934

CATALOG NUMBER: LX6C35D010 EX6C359030 6LBMDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 113 | 111 | 108 | 106 | 111 | 109 | 106 | 104 | 105 | 103 | 101 | 101 | 99 | 98 | 97 | 96 | 95 | 93 |
| 2 | 108 | 103 | 99 | 96 | 106 | 101 | 98 | 94 | 98 | 95 | 92 | 95 | 93 | 90 | 92 | 90 | 89 | 87 |
| 3 | 102 | 96 | 91 | 87 | 100 | 95 | 90 | 86 | 92 | 88 | 85 | 90 | 86 | 84 | 87 | 85 | 82 | 81 |
| 4 | 97 | 90 | 84 | 80 | 95 | 89 | 83 | 80 | 86 | 82 | 79 | 84 | 81 | 78 | 83 | 79 | 77 | 75 |
| 5 | 92 | 84 | 78 | 74 | 91 | 83 | 78 | 74 | 81 | 77 | 73 | 80 | 76 | 72 | 78 | 75 | 72 | 70 |
| 6 | 88 | 79 | 73 | 69 | 86 | 78 | 73 | 69 | 77 | 72 | 68 | 75 | 71 | 68 | 74 | 70 | 67 | 66 |
| 7 | 84 | 74 | 68 | 64 | 82 | 74 | 68 | 64 | 72 | 67 | 64 | 71 | 67 | 63 | 70 | 66 | 63 | 62 |
| 8 | 80 | 70 | 64 | 60 | 78 | 70 | 64 | 60 | 68 | 63 | 60 | 67 | 63 | 59 | 66 | 62 | 59 | 58 |
| 9 | 76 | 66 | 60 | 56 | 75 | 66 | 60 | 56 | 65 | 60 | 56 | 64 | 59 | 56 | 63 | 59 | 56 | 54 |
| 10 | 72 | 63 | 57 | 53 | 71 | 62 | 57 | 53 | 62 | 56 | 53 | 61 | 56 | 53 | 60 | 56 | 53 | 51 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 184673 |
| 5° | 178956 |
| 10° | 164788 |
| 15° | 147804 |
| 20° | 131512 |
| 25° | 109210 |
| 30° | 78025 |
| 35° | 50152 |
| 40° | 30564 |
| 45° | 16986 |
| 50° | 7531 |
| 55° | 4358 |
| 60° | 2873 |
| 65° | 2037 |
| 70° | 1443 |
| 75° | 1101 |
| 80° | 695 |
| 85° | 440 |



TEST NUMBER: P563934

CATALOG NUMBER: LX6C35D010 EX6C359030 6LBMDH

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 301.0 | 11.7 |
| 10°-20° | 728.6 | 28.4 |
| 20°-30° | 810.3 | 31.6 |
| 30°-40° | 480.1 | 18.7 |
| 40°-50° | 175.9 | 6.9 |
| 50°-60° | 44.2 | 1.7 |
| 60°-70° | 16.1 | 0.6 |
| 70°-80° | 5.6 | 0.2 |
| 80°-90° | 1.1 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1839.9 | 71.8 |
| 0°-40° | 2320.1 | 90.5 |
| 0°-60° | 2540.1 | 99.1 |
| 0°-90° | 2563.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 2563.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 3369 | |
| 5° | 3252 | 301 |
| 15° | 2604 | 729 |
| 25° | 1806 | 810 |
| 35° | 749 | 480 |
| 45° | 219 | 176 |
| 55° | 46 | 44 |
| 65° | 16 | 16 |
| 75° | 5 | 6 |
| 85° | 1 | 1 |
| 90° | 0 | |



TEST NUMBER: P563934

CATALOG NUMBER: LX6C35D010 EX6C359030 6LBMDH

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 3368.7 |
| 2.5° | 3338.8 |
| 5° | 3252.0 |
| 7.5° | 3120.4 |
| 10° | 2960.3 |
| 12.5° | 2783.8 |
| 15° | 2604.3 |
| 17.5° | 2430.0 |
| 20° | 2254.3 |
| 22.5° | 2050.1 |
| 25° | 1805.5 |
| 27.5° | 1524.3 |
| 30° | 1232.6 |
| 32.5° | 971.6 |
| 35° | 749.4 |
| 37.5° | 569.2 |
| 40° | 427.1 |
| 42.5° | 311.1 |
| 45° | 219.1 |
| 47.5° | 139.1 |
| 50° | 88.3 |
| 52.5° | 62.1 |
| 55° | 45.6 |
| 57.5° | 34.4 |
| 60° | 26.2 |
| 62.5° | 20.2 |
| 65° | 15.7 |
| 67.5° | 12.0 |
| 70° | 9.0 |
| 72.5° | 6.7 |
| 75° | 5.2 |
| 77.5° | 3.7 |
| 80° | 2.2 |
| 82.5° | 1.5 |
| 85° | 0.7 |
| 87.5° | 0.7 |
| 90° | 0.0 |



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)