

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856634

Luminaire Tested: **LD6C40D010 EU6409030 6LBWLI**

Issue Date: 2/15/2022

**Test Information**

Test Method: LM-79-08  
Report Number: P856634  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205209)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD6C40D010 EU6409030 6LBWLI  
Description: 6 INCH 4000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS  
AND 6LBW TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4157.0 lumens  
Efficiency: N/A  
Efficacy: 88.4 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 47  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P856634

CATALOG NUMBER: LD6C40D010 EU6409030 6LBWLI

### Luminous Intensity Polar Plot

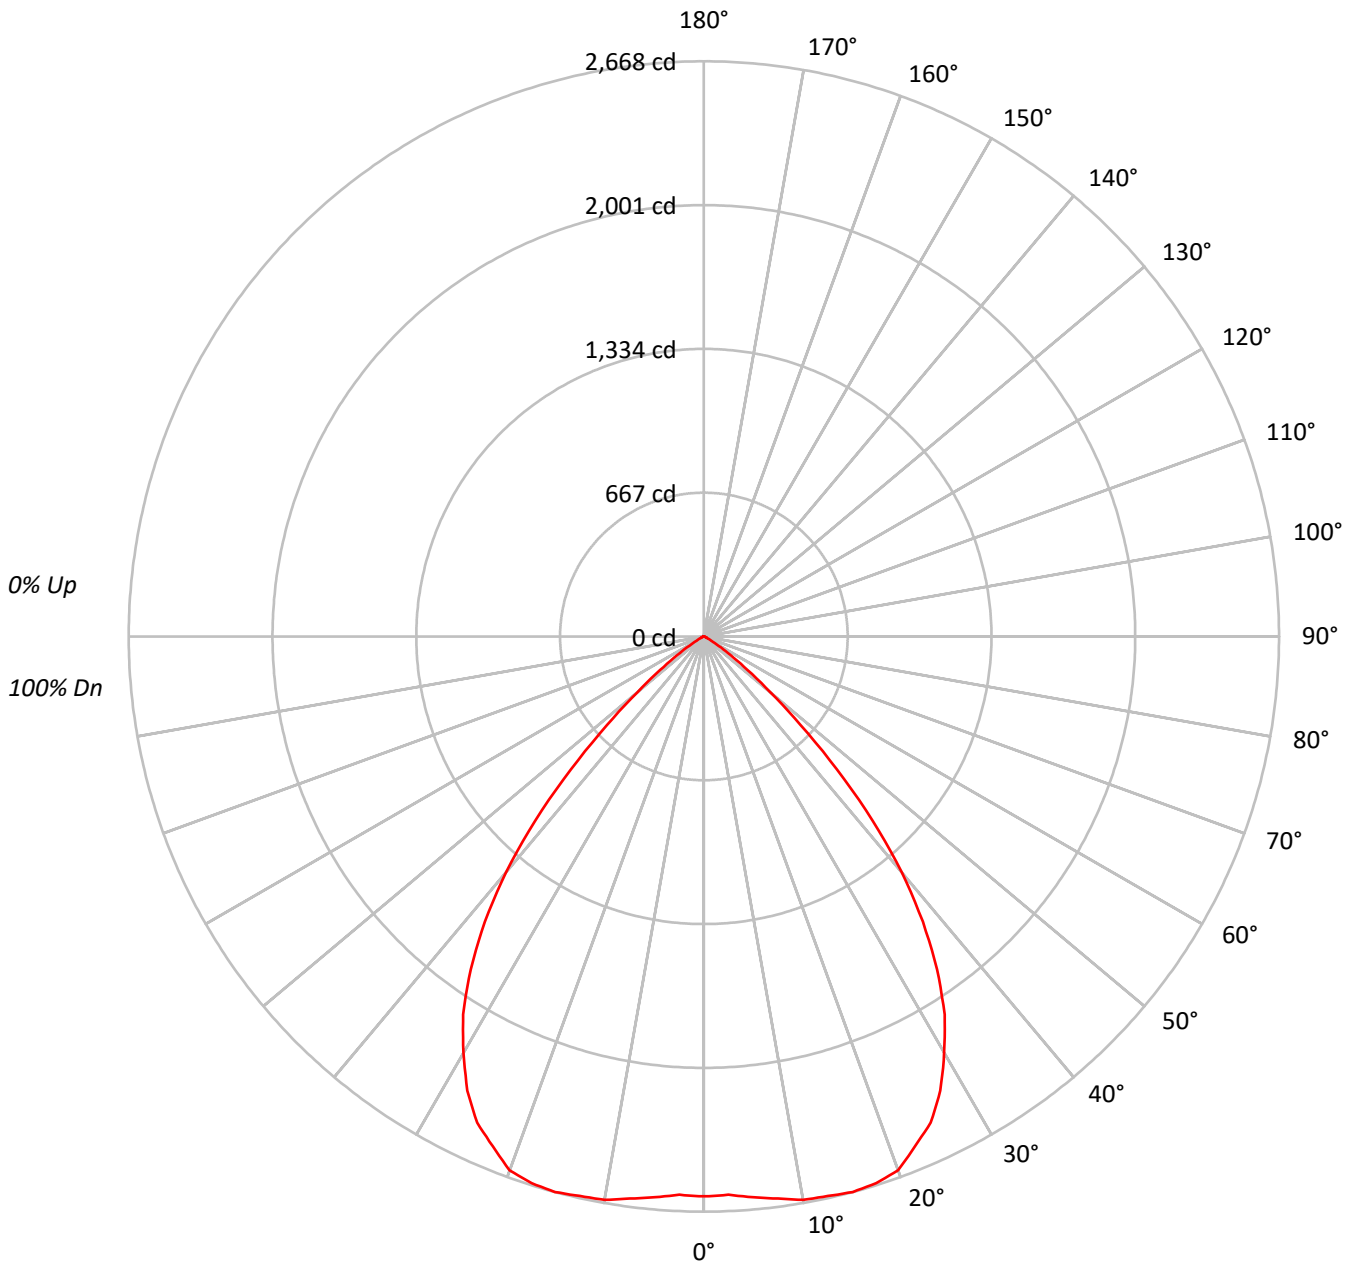



TEST NUMBER: P856634

CATALOG NUMBER: LD6C40D010 EU6409030 6LBWLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92			92
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			83
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76			76
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69			69
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63			63
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57			57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52			52
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48			48
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44			44
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41			41

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	142368
5°	143688
10°	147704
15°	151403
20°	153698
25°	150523
30°	141123
35°	126170
40°	102199
45°	67604
50°	34174
55°	14413
60°	4649
65°	1829
70°	1523
75°	996
80°	0
85°	0



TEST NUMBER: P856634

CATALOG NUMBER: LD6C40D010 EU6409030 6LBWLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	250.5	6.0
10°-20°	753.0	18.1
20°-30°	1135.1	27.3
30°-40°	1161.8	27.9
40°-50°	676.9	16.3
50°-60°	155.6	3.7
60°-70°	19.1	0.5
70°-80°	5.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2138.7	51.4
0°-40°	3300.5	79.4
0°-60°	4132.9	99.4
0°-90°	4157.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4157.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2597	
5°	2611	251
15°	2668	753
25°	2488	1135
35°	1885	1162
45°	872	677
55°	151	156
65°	14	19
75°	5	5
85°	0	0
90°	0	



TEST NUMBER: P856634

CATALOG NUMBER: LD6C40D010 EU6409030 6LBWLI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2597.0
2.5°	2592.2
5°	2611.1
7.5°	2629.9
10°	2653.4
12.5°	2658.2
15°	2667.7
17.5°	2658.2
20°	2634.6
22.5°	2559.2
25°	2488.5
27.5°	2375.5
30°	2229.4
32.5°	2078.5
35°	1885.3
37.5°	1668.4
40°	1428.1
42.5°	1159.4
45°	872.0
47.5°	607.9
50°	400.7
52.5°	254.6
55°	150.8
57.5°	80.2
60°	42.4
62.5°	23.6
65°	14.1
67.5°	14.1
70°	9.5
72.5°	4.7
75°	4.7
77.5°	4.7
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)