

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684331

Luminaire Tested: **LX6C05D010 EX6C059027 6LBWH**

Issue Date: 2/15/2022



Test Information

Test Method: LM-79-08
Report Number: P684331
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P202739)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C05D010 EX6C059027 6LBWH
Description: 6 INCH 500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS AND 6LBW TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 569.0 lumens
Efficiency: N/A
Efficacy: 79.0 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P684331

CATALOG NUMBER: LX6C05D010 EX6C059027 6LBWH

Luminous Intensity Polar Plot

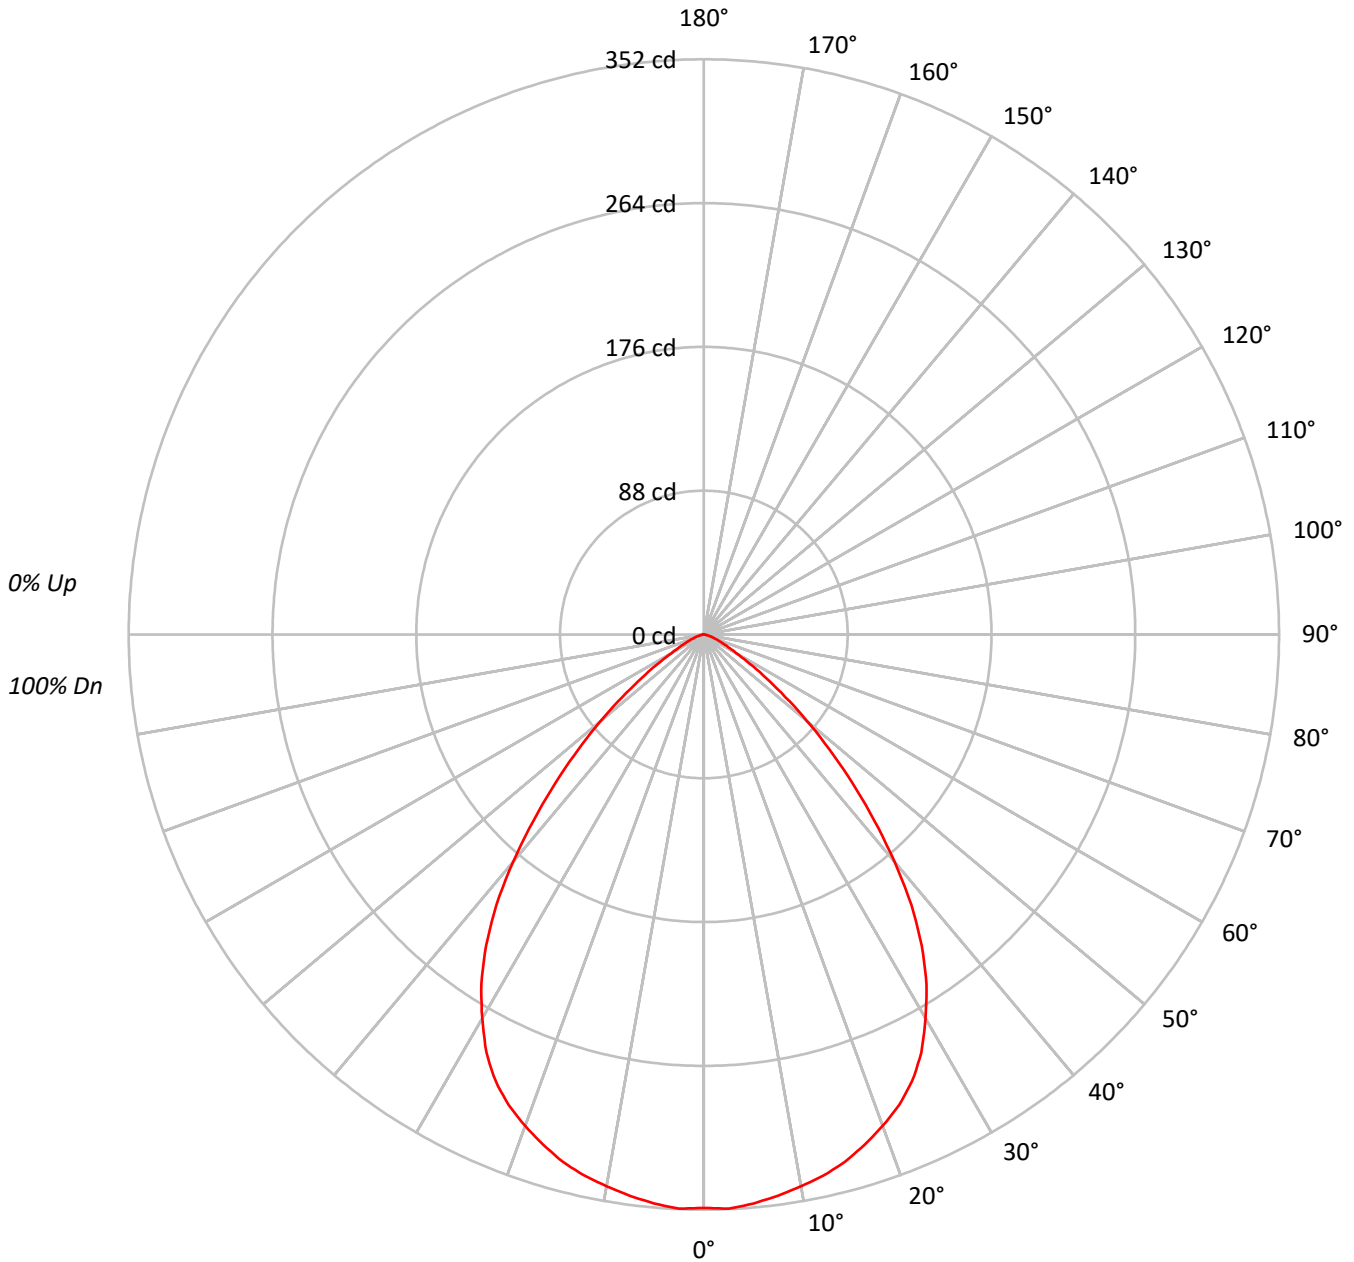



TEST NUMBER: P684331

CATALOG NUMBER: LX6C05D010 EX6C059027 6LBWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			73
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			65
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			59
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			53
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			49
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			41
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	19236
5°	19233
10°	19082
15°	18956
20°	18668
25°	18243
30°	17174
35°	15546
40°	12981
45°	9947
50°	7045
55°	4444
60°	2500
65°	1621
70°	1058
75°	784
80°	474
85°	440



TEST NUMBER: P684331

CATALOG NUMBER: LX6C05D010 EX6C059027 6LBWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.1	5.8
10°-20°	94.0	16.5
20°-30°	137.9	24.2
30°-40°	143.5	25.2
40°-50°	99.3	17.5
50°-60°	43.2	7.6
60°-70°	13.3	2.3
70°-80°	4.0	0.7
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	265.1	46.6
0°-40°	408.6	71.8
0°-60°	551.2	96.9
0°-90°	569.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	569.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	351	
5°	350	33
15°	334	94
25°	302	138
35°	232	144
45°	128	99
55°	46	43
65°	12	13
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P684331

CATALOG NUMBER: LX6C05D010 EX6C059027 6LBWH

CANDELA DISTRIBUTION (FULL):

	0°
0°	350.9
2.5°	351.7
5°	349.5
7.5°	346.5
10°	342.8
12.5°	339.1
15°	334.0
17.5°	327.3
20°	320.0
22.5°	311.9
25°	301.6
27.5°	288.3
30°	271.3
32.5°	253.6
35°	232.3
37.5°	208.7
40°	181.4
42.5°	154.1
45°	128.3
47.5°	103.9
50°	82.6
52.5°	62.7
55°	46.5
57.5°	33.2
60°	22.8
62.5°	17.0
65°	12.5
67.5°	9.6
70°	6.6
72.5°	5.2
75°	3.7
77.5°	2.2
80°	1.5
82.5°	0.7
85°	0.7
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)