

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P685054

Luminaire Tested: **LX6C05D010 EX6059040 6LBSLI**

Issue Date: 2/15/2022

Test Information

Test Method: LM-79-08
Report Number: P685054
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205419)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C05D010 EX6059040 6LBSLI
Description: 6 INCH 500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS AND 6LBS TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 732.1 lumens
Efficiency: N/A
Efficacy: 101.7 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1.04
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P685054

CATALOG NUMBER: LX6C05D010 EX6059040 6LBSLI

Luminous Intensity Polar Plot

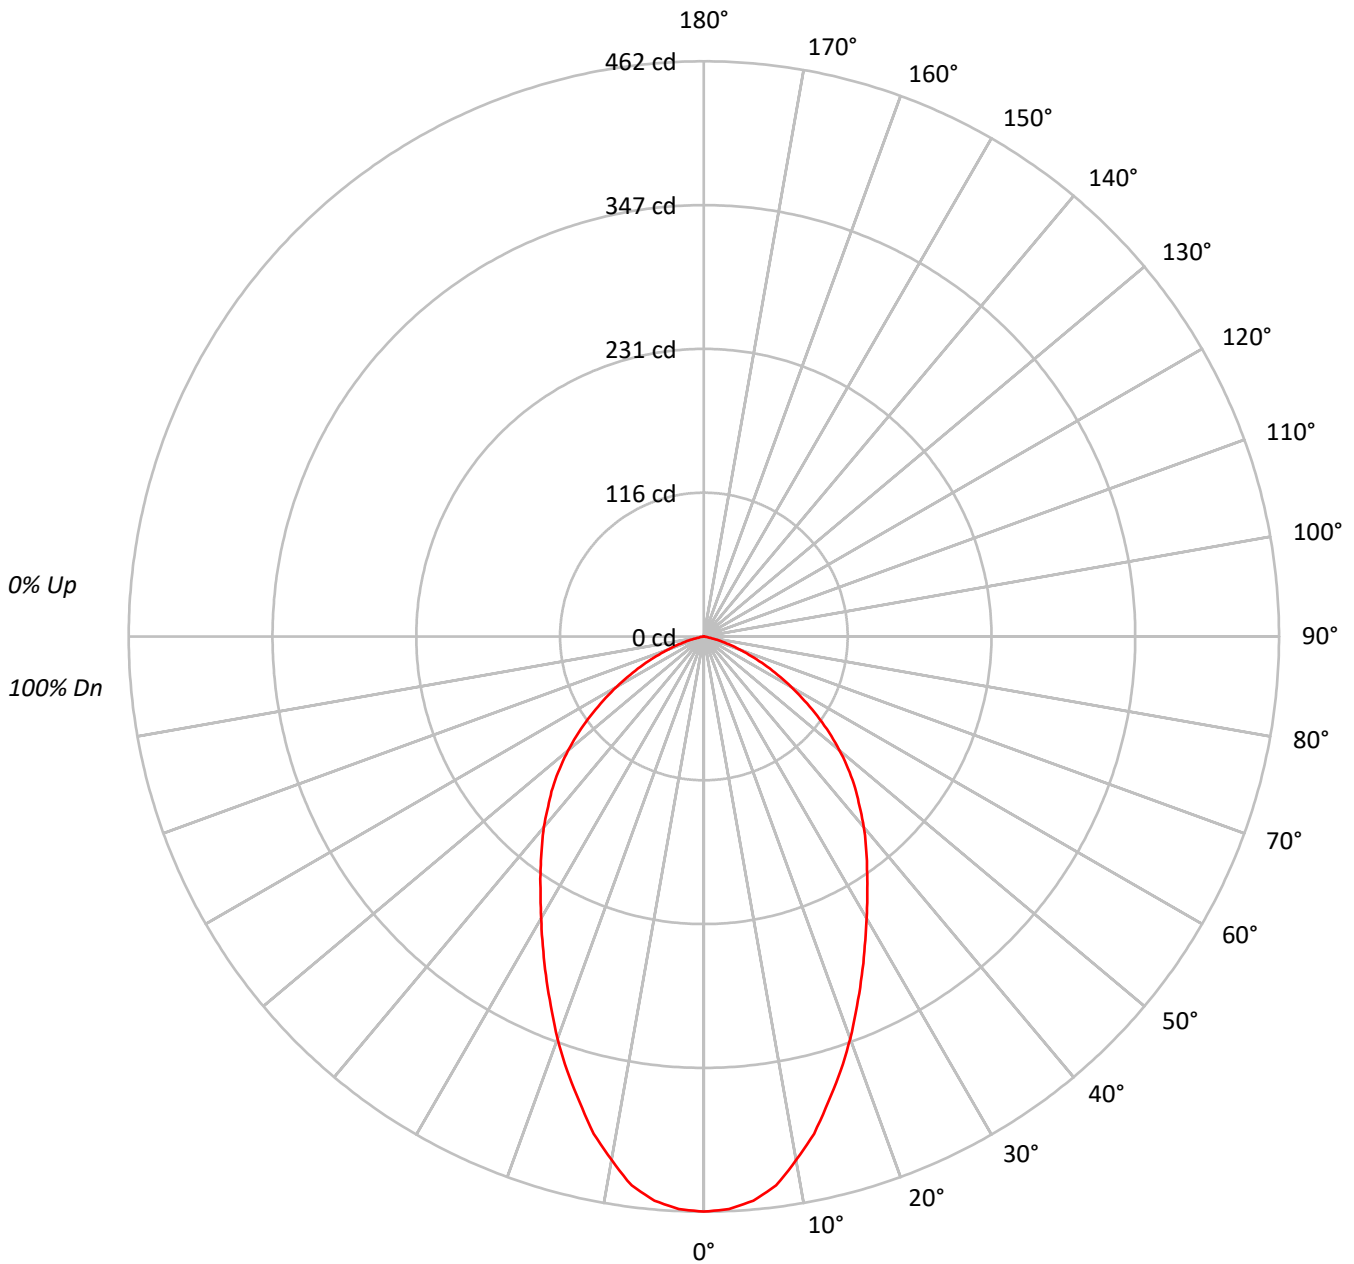



TEST NUMBER: P685054

CATALOG NUMBER: LX6C05D010 EX6059040 6LBSLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89			89
2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77			77
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	70	68			68
4	88	78	70	64	86	77	69	64	74	68	63	72	67	62	70	65	62	60			60
5	82	71	63	57	80	70	62	57	67	61	56	66	60	55	64	59	55	53			53
6	76	64	56	51	74	63	56	51	62	55	50	60	54	50	59	53	49	47			47
7	71	59	51	46	70	58	51	45	57	50	45	55	49	45	54	49	45	43			43
8	67	54	47	41	65	54	46	41	52	46	41	51	45	41	50	45	41	39			39
9	63	50	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36			36
10	59	47	40	35	58	46	39	35	45	39	35	45	39	34	44	38	34	33			33

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	25321
5°	25033
10°	23764
15°	21935
20°	20051
25°	18158
30°	16541
35°	15299
40°	14305
45°	13327
50°	12136
55°	10628
60°	8870
65°	6966
70°	4857
75°	2626
80°	505
85°	0



TEST NUMBER: P685054

CATALOG NUMBER: LX6C05D010 EX6059040 6LBSLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	42.6	5.8
10°-20°	108.4	14.8
20°-30°	138.2	18.9
30°-40°	143.3	19.6
40°-50°	132.1	18.0
50°-60°	99.3	13.6
60°-70°	53.6	7.3
70°-80°	14.4	2.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	289.1	39.5
0°-40°	432.4	59.1
0°-60°	663.8	90.7
0°-90°	732.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	732.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	462	
5°	455	43
15°	386	108
25°	300	138
35°	229	143
45°	172	132
55°	111	99
65°	54	54
75°	12	14
85°	0	0
90°	0	



TEST NUMBER: P685054

CATALOG NUMBER: LX6C05D010 EX6059040 6LBSLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	461.9
2.5°	460.4
5°	454.9
7.5°	444.8
10°	426.9
12.5°	409.1
15°	386.5
17.5°	365.5
20°	343.7
22.5°	321.2
25°	300.2
27.5°	280.0
30°	261.3
32.5°	244.2
35°	228.6
37.5°	213.9
40°	199.9
42.5°	185.1
45°	171.9
47.5°	157.1
50°	142.3
52.5°	126.8
55°	111.2
57.5°	95.7
60°	80.9
62.5°	66.9
65°	53.7
67.5°	41.2
70°	30.3
72.5°	21.0
75°	12.4
77.5°	5.4
80°	1.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)