

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P563957

Luminaire Tested: **LX6C05D010 EX6C059030 6LBNH**

Issue Date: 2/15/2022



Test Information

Test Method: LM-79-08
Report Number: P563957
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203666)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C05D010 EX6C059030 6LBNH
Description: 6 INCH 500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS AND 6LBN TRIM WITH H FINISH, DIM TO WARM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 420.0 lumens
Efficiency: N/A
Efficacy: 58.3 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.84
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P563957

CATALOG NUMBER: LX6C05D010 EX6C059030 6LBNH

Luminous Intensity Polar Plot

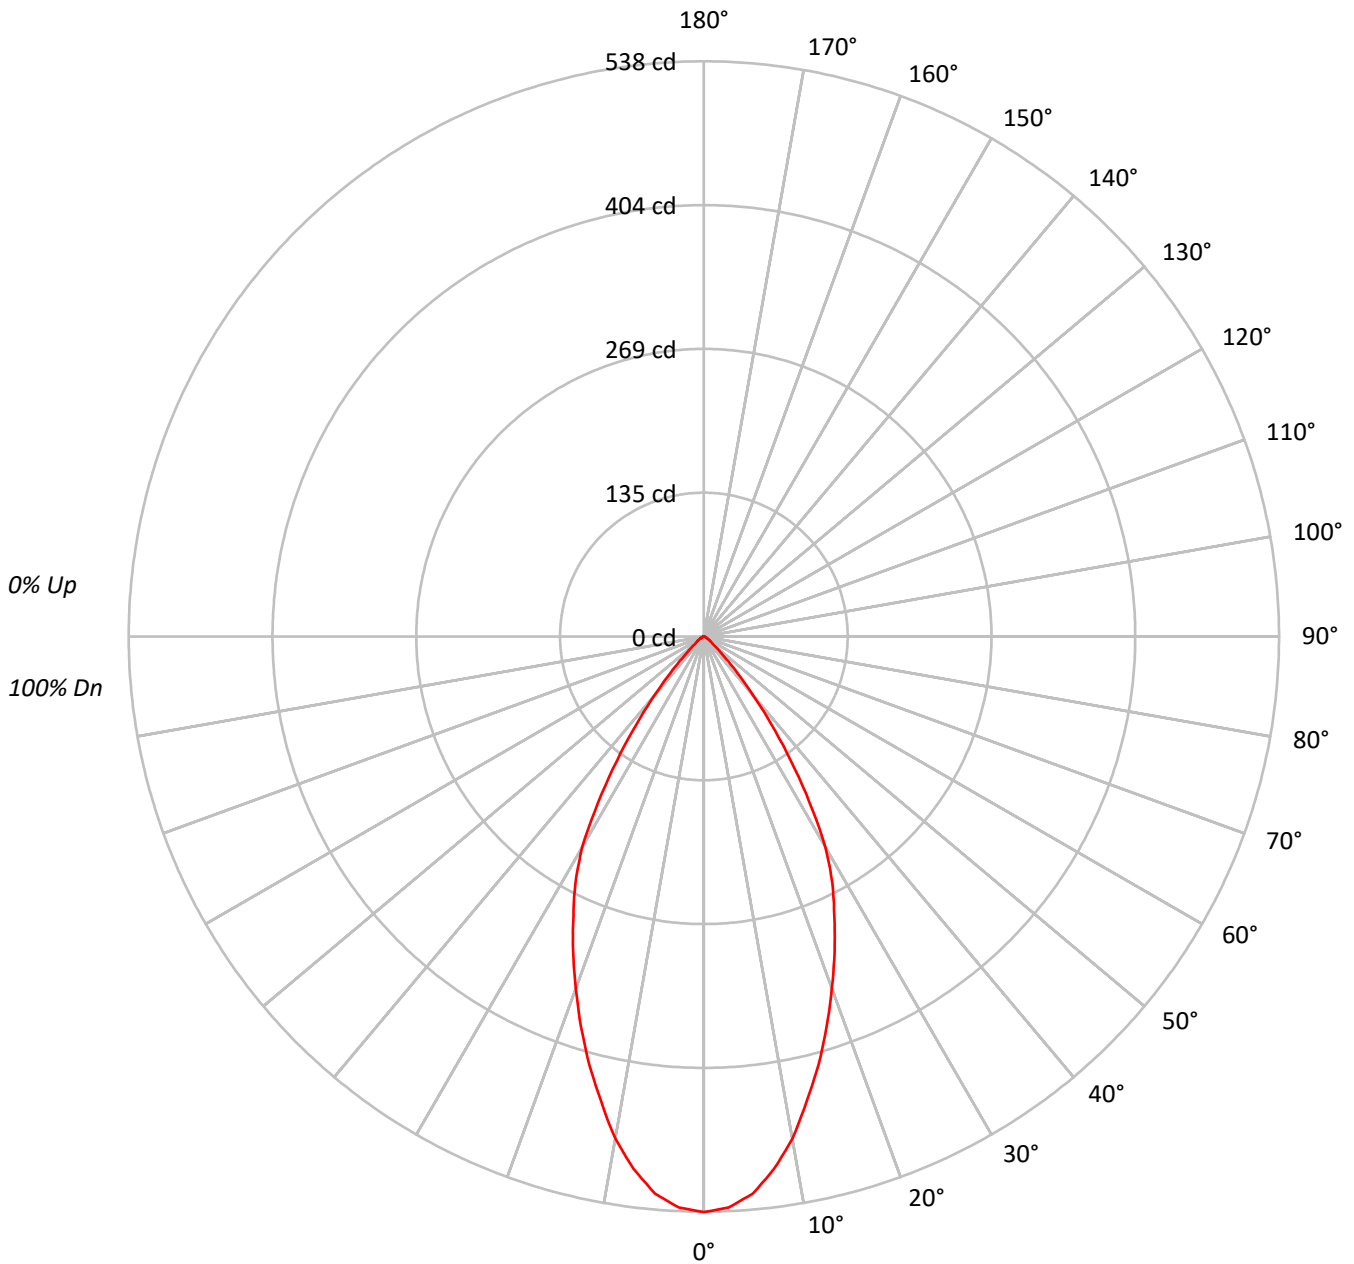



TEST NUMBER: P563957

CATALOG NUMBER: LX6C05D010 EX6C059030 6LBNH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	29515
5°	28786
10°	26558
15°	23513
20°	20418
25°	17463
30°	14401
35°	9483
40°	5095
45°	2256
50°	913
55°	659
60°	417
65°	298
70°	240
75°	169
80°	253
85°	0



TEST NUMBER: P563957

CATALOG NUMBER: LX6C05D010 EX6C059030 6LBNH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.4	11.5
10°-20°	115.5	27.5
20°-30°	132.3	31.5
30°-40°	88.9	21.2
40°-50°	25.4	6.0
50°-60°	6.2	1.5
60°-70°	2.4	0.6
70°-80°	0.9	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	296.2	70.5
0°-40°	385.0	91.7
0°-60°	416.6	99.2
0°-90°	420.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	420.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	538	
5°	523	48
15°	414	115
25°	289	132
35°	142	89
45°	29	25
55°	7	6
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P563957

CATALOG NUMBER: LX6C05D010 EX6C059030 6LBNH

CANDELA DISTRIBUTION (FULL):

	0°
0°	538.4
2.5°	534.6
5°	523.1
7.5°	502.4
10°	477.1
12.5°	444.9
15°	414.3
17.5°	382.2
20°	350.0
22.5°	319.4
25°	288.7
27.5°	260.4
30°	227.5
32.5°	183.8
35°	141.7
37.5°	103.4
40°	71.2
42.5°	46.7
45°	29.1
47.5°	17.6
50°	10.7
52.5°	8.4
55°	6.9
57.5°	5.4
60°	3.8
62.5°	3.1
65°	2.3
67.5°	1.5
70°	1.5
72.5°	0.8
75°	0.8
77.5°	0.8
80°	0.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)