

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P563959

Luminaire Tested: **LX6C05D010 EX6C059030 6LBWH**

Issue Date: 2/15/2022



Test Information

Test Method: LM-79-08
Report Number: P563959
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P202739)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C05D010 EX6C059030 6LBWH
Description: 6 INCH 500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS AND 6LBW TRIM WITH H FINISH, DIM TO WARM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 591.0 lumens
Efficiency: N/A
Efficacy: 82.1 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P563959

CATALOG NUMBER: LX6C05D010 EX6C059030 6LBWH

Luminous Intensity Polar Plot

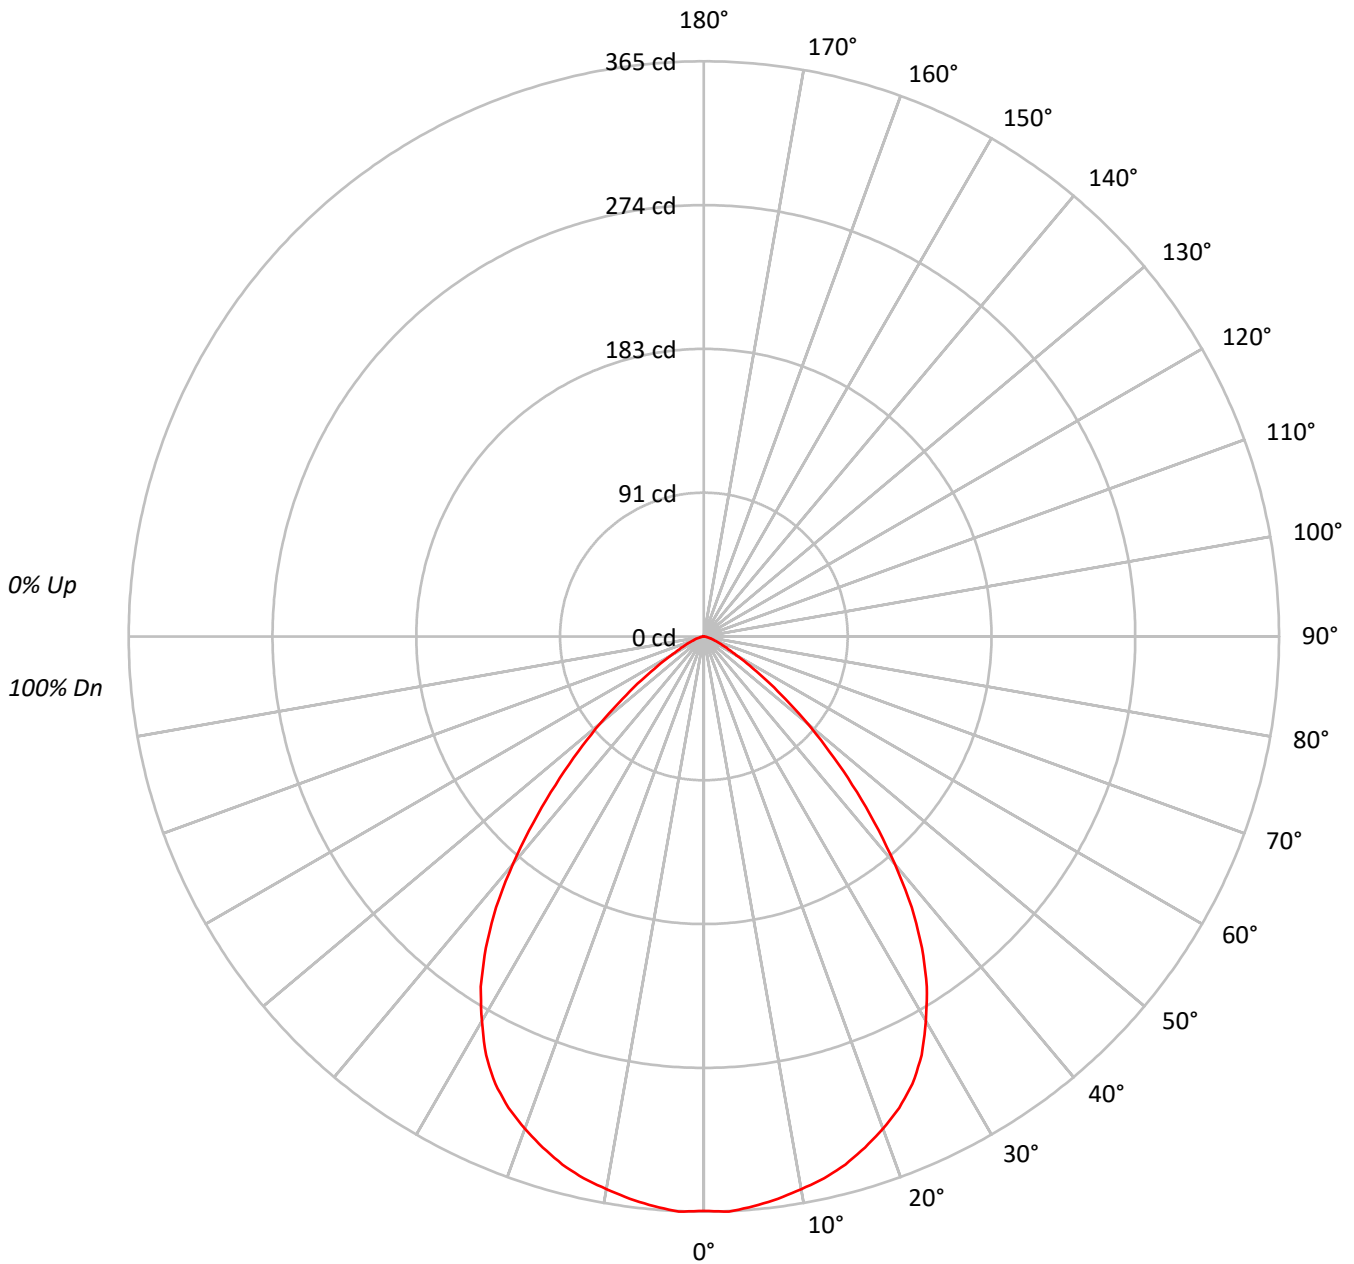



TEST NUMBER: P563959

CATALOG NUMBER: LX6C05D010 EX6C059030 6LBWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			73
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			65
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			59
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			53
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			49
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			41
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	19982
5°	19976
10°	19823
15°	19688
20°	19392
25°	18945
30°	17838
35°	16142
40°	13482
45°	10327
50°	7317
55°	4616
60°	2598
65°	1686
70°	1106
75°	805
80°	474
85°	503



TEST NUMBER: P563959

CATALOG NUMBER: LX6C05D010 EX6C059030 6LBWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	34.4	5.8
10°-20°	97.7	16.5
20°-30°	143.2	24.2
30°-40°	149.1	25.2
40°-50°	103.1	17.5
50°-60°	44.9	7.6
60°-70°	13.8	2.3
70°-80°	4.1	0.7
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	275.3	46.6
0°-40°	424.4	71.8
0°-60°	572.5	96.9
0°-90°	591.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	591.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	364	
5°	363	34
15°	347	98
25°	313	143
35°	241	149
45°	133	103
55°	48	45
65°	13	14
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P563959

CATALOG NUMBER: LX6C05D010 EX6C059030 6LBWH

CANDELA DISTRIBUTION (FULL):

	0°
0°	364.5
2.5°	365.3
5°	363.0
7.5°	359.9
10°	356.1
12.5°	352.3
15°	346.9
17.5°	340.0
20°	332.4
22.5°	323.9
25°	313.2
27.5°	299.4
30°	281.8
32.5°	263.4
35°	241.2
37.5°	216.7
40°	188.4
42.5°	160.1
45°	133.2
47.5°	108.0
50°	85.8
52.5°	65.1
55°	48.3
57.5°	34.5
60°	23.7
62.5°	17.6
65°	13.0
67.5°	10.0
70°	6.9
72.5°	5.4
75°	3.8
77.5°	2.3
80°	1.5
82.5°	0.8
85°	0.8
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)