

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684383

Luminaire Tested: **LX6C50D010 EX6C509035 6LBSH**

Issue Date: 2/15/2022

Test Information

Test Method: LM-79-08
Report Number: P684383
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P204188)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C50D010 EX6C509035 6LBSH
Description: 6 INCH 5000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS
AND 6LBS TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5696.9 lumens
Efficiency: N/A
Efficacy: 97.6 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 58.4
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P684383

CATALOG NUMBER: LX6C50D010 EX6C509035 6LBSH

Luminous Intensity Polar Plot

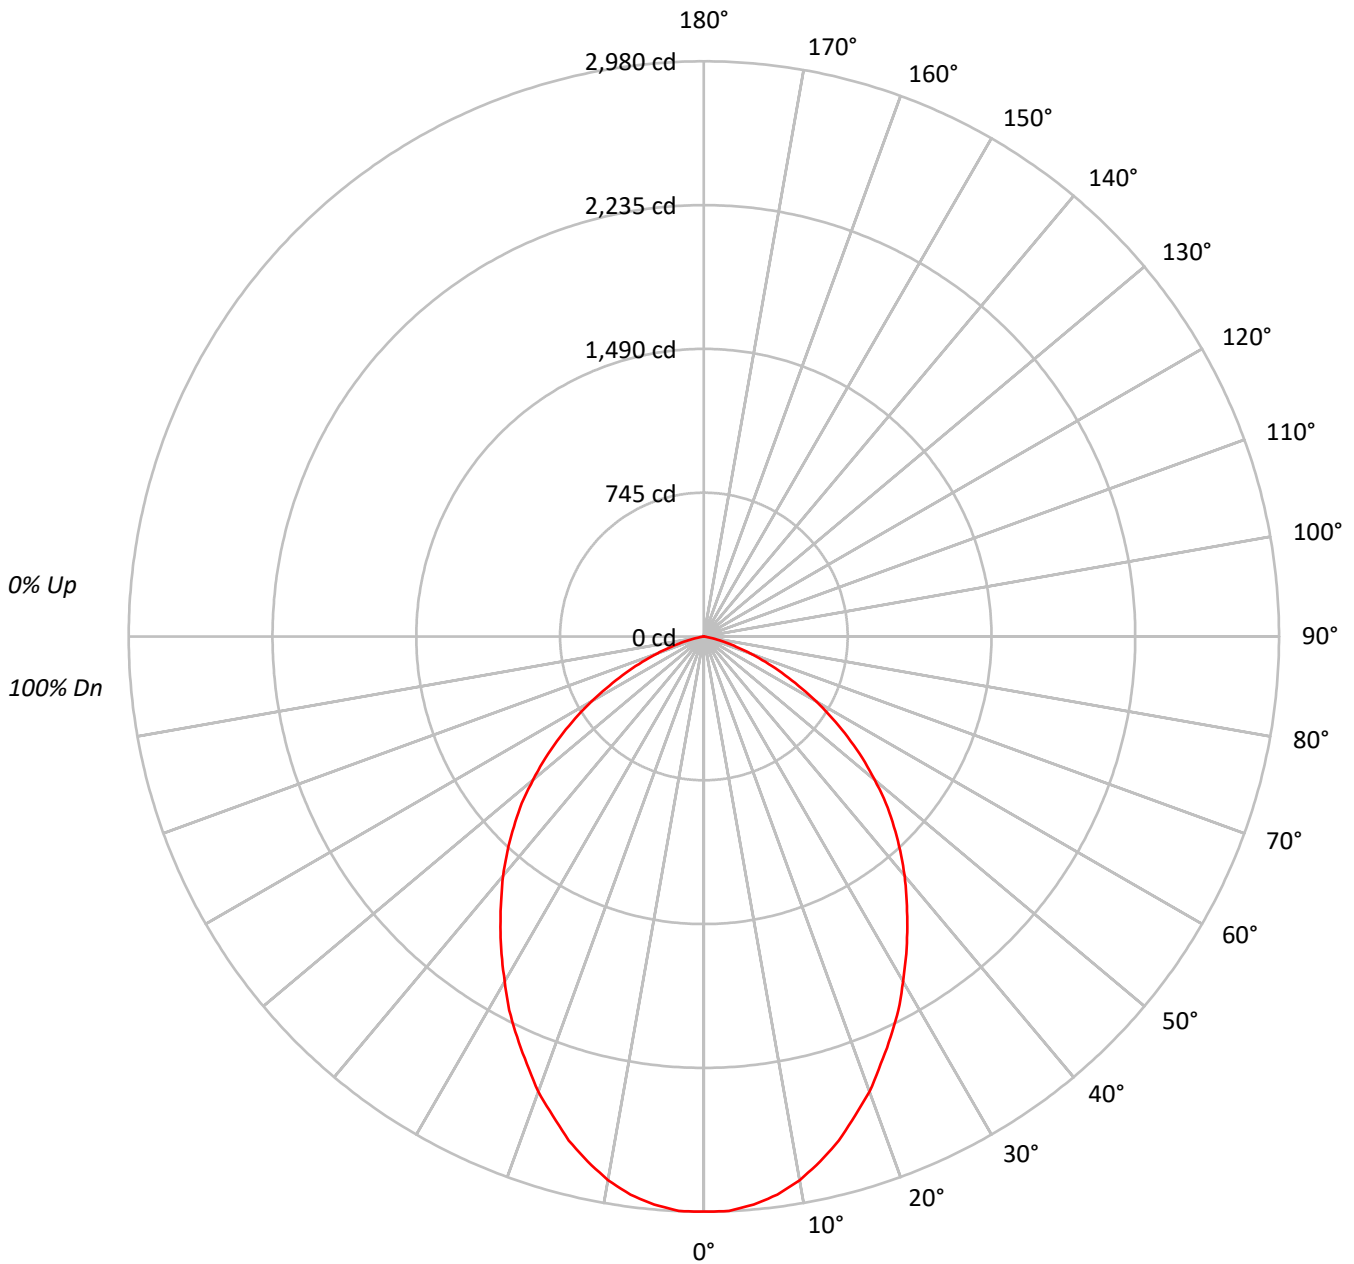



TEST NUMBER: P684383

CATALOG NUMBER: LX6C50D010 EX6C509035 6LBSH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	163337
5°	162579
10°	159221
15°	153429
20°	146377
25°	138486
30°	130634
35°	122998
40°	115817
45°	107957
50°	98436
55°	86936
60°	73580
65°	57775
70°	41225
75°	22579
80°	3978
85°	0



TEST NUMBER: P684383

CATALOG NUMBER: LX6C50D010 EX6C509035 6LBSH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	279.1	4.9
10°-20°	758.5	13.3
20°-30°	1053.4	18.5
30°-40°	1149.6	20.2
40°-50°	1072.4	18.8
50°-60°	814.0	14.3
60°-70°	445.7	7.8
70°-80°	122.6	2.2
80°-90°	1.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2091.1	36.7
0°-40°	3240.6	56.9
0°-60°	5127.0	90.0
0°-90°	5696.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5696.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2980	
5°	2954	279
15°	2703	759
25°	2290	1053
35°	1838	1150
45°	1392	1072
55°	910	814
65°	445	446
75°	107	123
85°	0	2
90°	0	



TEST NUMBER: P684383

CATALOG NUMBER: LX6C50D010 EX6C509035 6LBSH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2979.5
2.5°	2979.5
5°	2954.4
7.5°	2916.7
10°	2860.3
12.5°	2785.0
15°	2703.4
17.5°	2603.1
20°	2509.1
22.5°	2396.1
25°	2289.5
27.5°	2182.9
30°	2063.7
32.5°	1950.7
35°	1837.9
37.5°	1725.0
40°	1618.4
42.5°	1505.4
45°	1392.5
47.5°	1279.6
50°	1154.2
52.5°	1035.0
55°	909.6
57.5°	790.4
60°	671.1
62.5°	552.0
65°	445.4
67.5°	344.9
70°	257.2
72.5°	175.6
75°	106.6
77.5°	50.2
80°	12.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)