

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684405

Luminaire Tested: **LX6C55D010 EX6C559027 6LBMDH**

Issue Date: 2/15/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P684405  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-21)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX6C55D010 EX6C559027 6LBMDH  
Description: 6 INCH 5500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS  
AND 6LRMD45 TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4194.0 lumens  
Efficiency: N/A  
Efficacy: 65.6 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.8  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 63.9  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P684405

CATALOG NUMBER: LX6C55D010 EX6C559027 6LBMDH

### Luminous Intensity Polar Plot

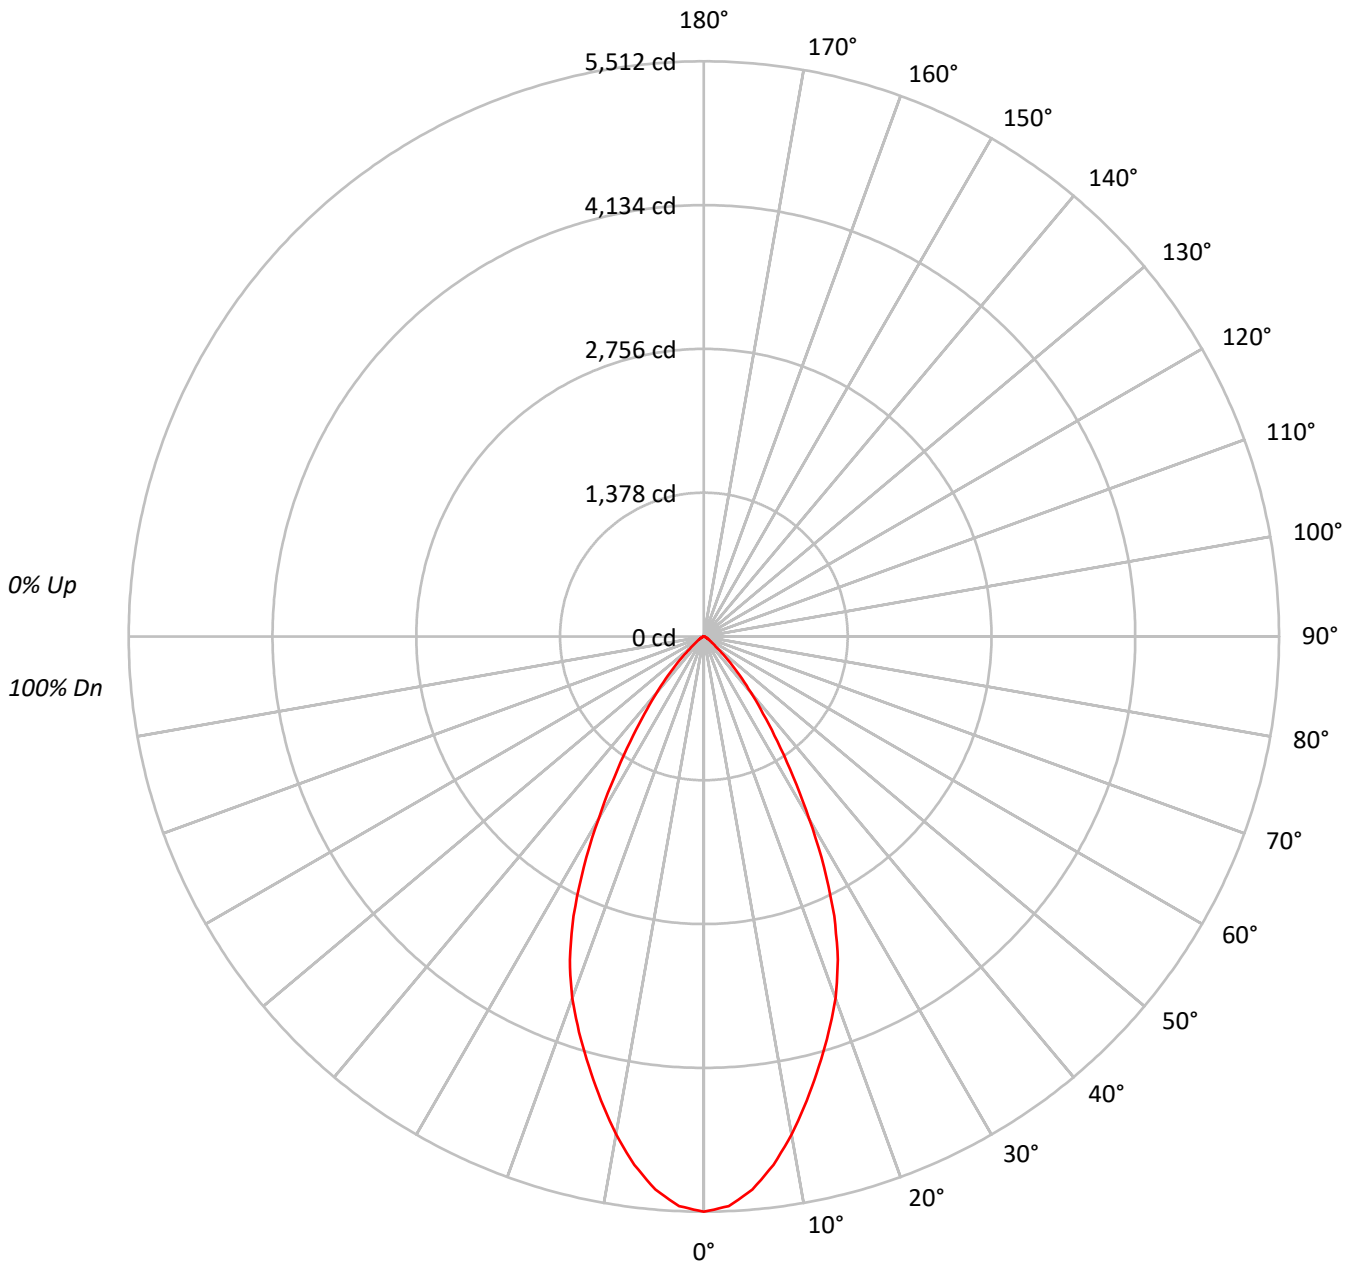



TEST NUMBER: P684405

CATALOG NUMBER: LX6C55D010 EX6C559027 6LBMDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	80	86	82	79	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62			
8	80	70	64	60	78	70	64	60	68	63	60	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54			
10	72	63	57	53	71	62	57	53	62	56	53	61	56	53	60	56	53	51			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	302191
5°	292840
10°	269657
15°	241863
20°	215199
25°	178710
30°	127678
35°	82068
40°	50008
45°	27801
50°	12315
55°	7140
60°	4693
65°	3334
70°	2356
75°	1822
80°	1168
85°	755



TEST NUMBER: P684405

CATALOG NUMBER: LX6C55D010 EX6C559027 6LBMDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	492.6	11.7
10°-20°	1192.3	28.4
20°-30°	1325.9	31.6
30°-40°	785.7	18.7
40°-50°	287.8	6.9
50°-60°	72.3	1.7
60°-70°	26.4	0.6
70°-80°	9.2	0.2
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3010.8	71.8
0°-40°	3796.5	90.5
0°-60°	4156.6	99.1
0°-90°	4194.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4194.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5512	
5°	5322	493
15°	4262	1192
25°	2954	1326
35°	1226	786
45°	359	288
55°	75	72
65°	26	26
75°	9	9
85°	1	2
90°	0	



TEST NUMBER: P684405

CATALOG NUMBER: LX6C55D010 EX6C559027 6LBMDH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5512.4
2.5°	5463.5
5°	5321.5
7.5°	5106.1
10°	4844.2
12.5°	4555.3
15°	4261.6
17.5°	3976.4
20°	3688.8
22.5°	3354.7
25°	2954.5
27.5°	2494.3
30°	2017.0
32.5°	1589.8
35°	1226.3
37.5°	931.4
40°	698.8
42.5°	509.1
45°	358.6
47.5°	227.6
50°	144.4
52.5°	101.6
55°	74.7
57.5°	56.3
60°	42.8
62.5°	33.0
65°	25.7
67.5°	19.6
70°	14.7
72.5°	11.0
75°	8.6
77.5°	6.1
80°	3.7
82.5°	2.4
85°	1.2
87.5°	1.2
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)