

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P685097

Luminaire Tested: **LX6C55D010 EX6559035 6LBMLI**

Issue Date: 2/15/2022

Test Information

Test Method: LM-79-08
Report Number: P685097
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C55D010 EX6559035 6LBMLI
Description: 6 INCH 5500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS
AND 6LBM TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5470.1 lumens
Efficiency: N/A
Efficacy: 85.6 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 63.9
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P685097

CATALOG NUMBER: LX6C55D010 EX6559035 6LBMLI

Luminous Intensity Polar Plot

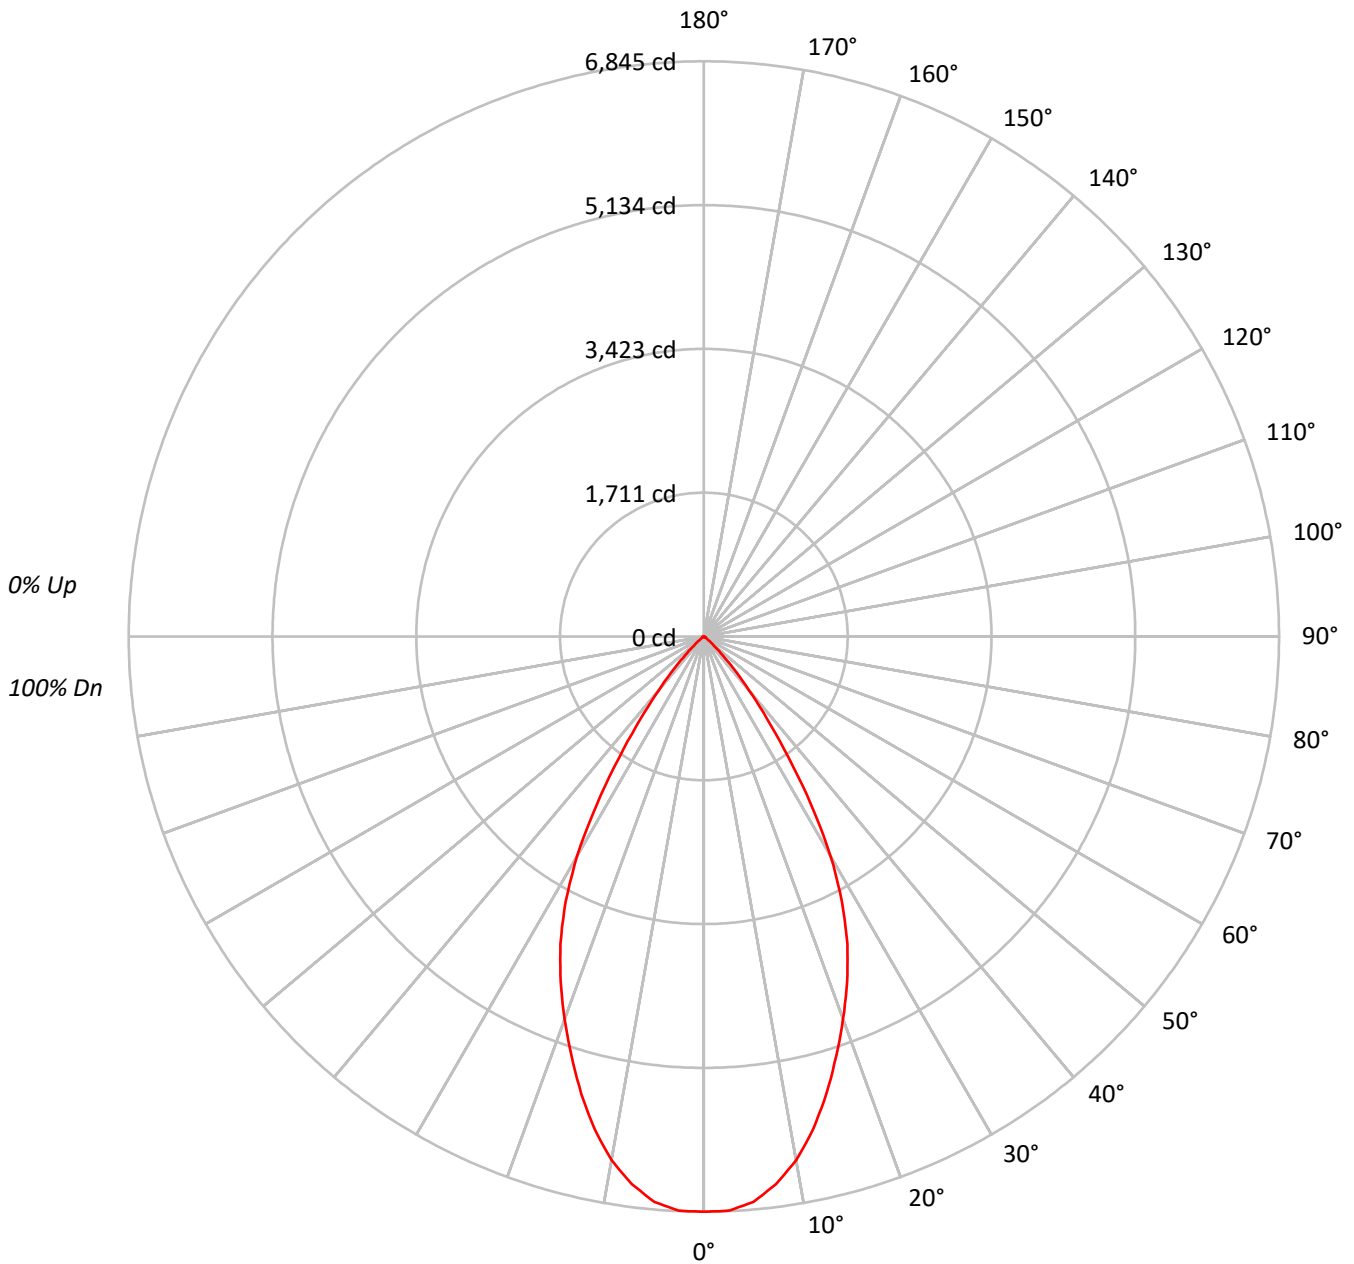



TEST NUMBER: P685097

CATALOG NUMBER: LX6C55D010 EX6559035 6LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	375266
5°	371697
10°	352220
15°	319780
20°	282574
25°	244296
30°	190960
35°	117109
40°	60105
45°	23878
50°	7752
55°	2676
60°	2291
65°	1829
70°	1138
75°	1504
80°	0
85°	0



TEST NUMBER: P685097

CATALOG NUMBER: LX6C55D010 EX6559035 6LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	630.6	11.5
10°-20°	1570.0	28.7
20°-30°	1825.1	33.4
30°-40°	1117.6	20.4
40°-50°	277.5	5.1
50°-60°	32.4	0.6
60°-70°	12.1	0.2
70°-80°	4.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4025.7	73.6
0°-40°	5143.3	94.0
0°-60°	5453.3	99.7
0°-90°	5470.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5470.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6845	
5°	6754	631
15°	5634	1570
25°	4039	1825
35°	1750	1118
45°	308	278
55°	28	32
65°	14	12
75°	7	5
85°	0	0
90°	0	



TEST NUMBER: P685097

CATALOG NUMBER: LX6C55D010 EX6559035 6LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	6845.4
2.5°	6838.4
5°	6754.5
7.5°	6572.4
10°	6327.4
12.5°	6005.5
15°	5634.5
17.5°	5235.6
20°	4843.7
22.5°	4451.6
25°	4038.8
27.5°	3562.8
30°	3016.7
32.5°	2379.8
35°	1749.9
37.5°	1231.8
40°	839.9
42.5°	524.9
45°	308.0
47.5°	175.0
50°	90.9
52.5°	42.1
55°	28.0
57.5°	20.9
60°	20.9
62.5°	14.1
65°	14.1
67.5°	7.1
70°	7.1
72.5°	7.1
75°	7.1
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)