

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684420

Luminaire Tested: **LX6C55D010 EX6C559035 6LBMH**

Issue Date: 2/15/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P684420  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203254)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX6C55D010 EX6C559035 6LBMH  
Description: 6 INCH 5500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS  
AND 6LBM TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4470.0 lumens  
Efficiency: N/A  
Efficacy: 70.0 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 63.9  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P684420

CATALOG NUMBER: LX6C55D010 EX6C559035 6LBMH

### Luminous Intensity Polar Plot

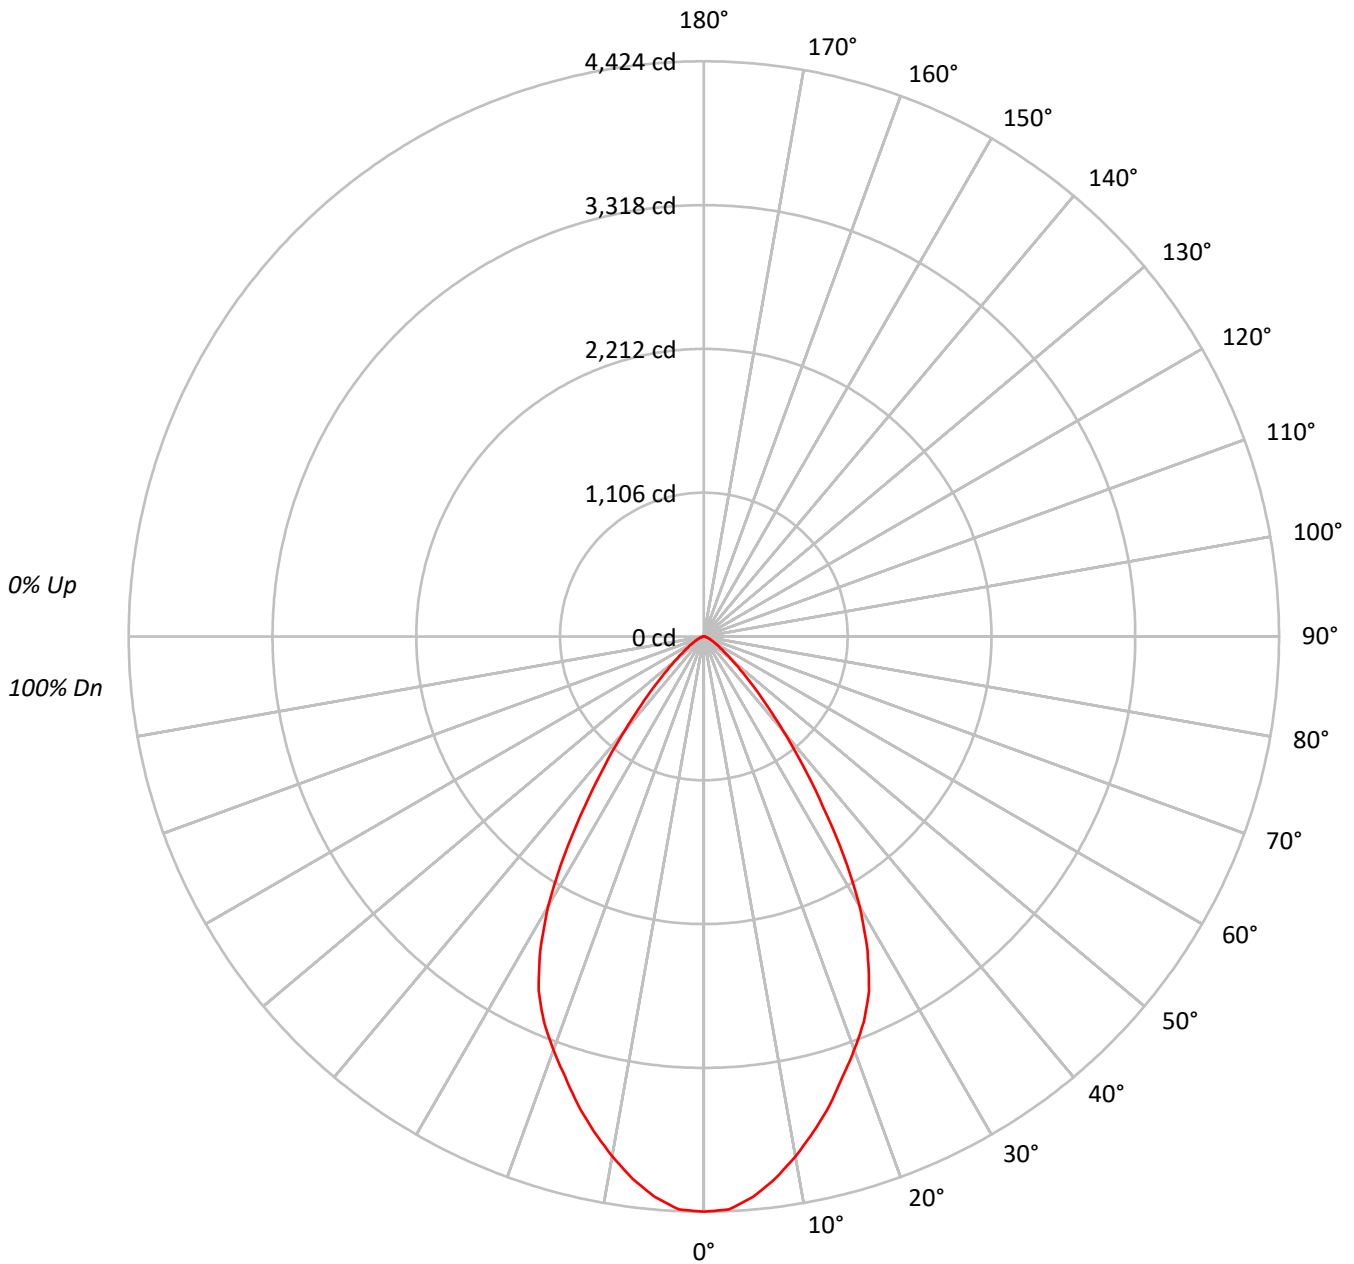



TEST NUMBER: P684420

CATALOG NUMBER: LX6C55D010 EX6C559035 6LBMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92	92	92	92
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	88	84	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72	72	72	72
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61	61	61	61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57	57	57	57
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53	53	53	53
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49	49	49	49
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46	46	46	46

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	242513
5°	238168
10°	225998
15°	211931
20°	197370
25°	181855
30°	151530
35°	106803
40°	68063
45°	40593
50°	23957
55°	15244
60°	10493
65°	7446
70°	5129
75°	4046
80°	1989
85°	0



TEST NUMBER: P684420

CATALOG NUMBER: LX6C55D010 EX6C559035 6LBMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	404.5	9.0
10°-20°	1046.4	23.4
20°-30°	1355.8	30.3
30°-40°	1006.6	22.5
40°-50°	424.9	9.5
50°-60°	150.9	3.4
60°-70°	58.2	1.3
70°-80°	20.1	0.5
80°-90°	2.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2806.7	62.8
0°-40°	3813.2	85.3
0°-60°	4389.0	98.2
0°-90°	4470.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4470.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4424	
5°	4328	404
15°	3734	1046
25°	3006	1356
35°	1596	1007
45°	524	425
55°	160	151
65°	57	58
75°	19	20
85°	0	3
90°	0	



TEST NUMBER: P684420

CATALOG NUMBER: LX6C55D010 EX6C559035 6LBMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4423.8
2.5°	4410.9
5°	4328.0
7.5°	4206.6
10°	4059.9
12.5°	3900.2
15°	3734.2
17.5°	3549.2
20°	3383.2
22.5°	3210.9
25°	3006.5
27.5°	2725.6
30°	2393.8
32.5°	2004.3
35°	1595.9
37.5°	1251.2
40°	951.1
42.5°	708.5
45°	523.6
47.5°	383.0
50°	280.9
52.5°	210.6
55°	159.5
57.5°	121.2
60°	95.7
62.5°	70.3
65°	57.4
67.5°	44.6
70°	32.0
72.5°	25.4
75°	19.1
77.5°	12.8
80°	6.3
82.5°	6.3
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)